


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

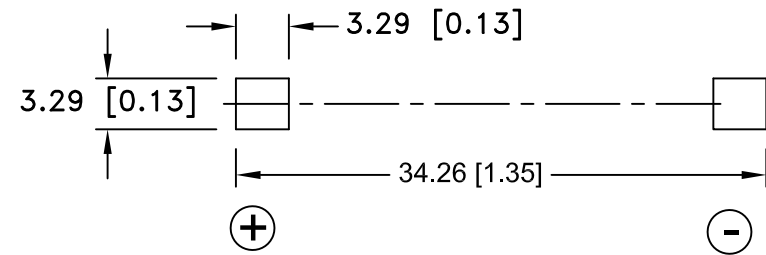


PCB LAYOUT

#### SPECIFICATIONS:

- \* Holder material- PA 46, Off-White, UL94V-0  
Temperature range: -40°C to +180°C,
- \* Contacts : Stainless Steel 301, spring temper, Nickel Plated,
- \* Vibration test: 10-50-10 hz swept in 60 seconds  
x,y,z direction: 1 hour each direction
- \* Result: no dislodgement of the cell or damage  
no discontinuity over 10 micro-seconds
- \* Shock test: half sine wave acceleration 150g.  
6 micro-seconds 3 shock pulses each direction per axis,  
total of 18 pulses
- \* Result: no evidence of physical damage

\* ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Title CR2032 BATTERY HOLDER, THRU HOLE	Scale	Drawn By B.S.
Fractional ± .8 (.030)		Approved By T.B.	
Angular ± 3°	Date 8/13/10	Drawing Number BC2032-F1	