




# Surface Mount PCB Lithium Coin Cell Battery Retainers

## Available on Tape & Reel

### Ideal for Wave Soldering Applications

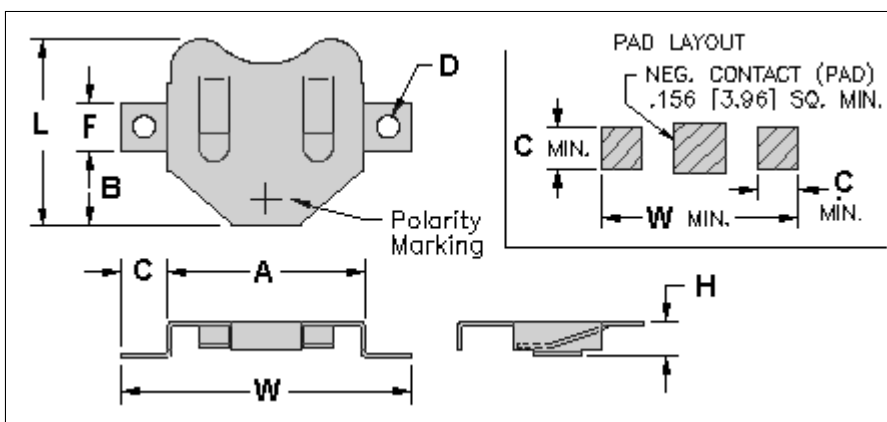

| Cat No.<br>(Bulk) | A              | B              | C                                | D                     | F             | H             | L              | W               | Cell Size | Tape & Reel<br>Spec's*                                   | Cat. No.<br>(On tape) |
|-------------------|----------------|----------------|----------------------------------|-----------------------|---------------|---------------|----------------|-----------------|-----------|--|-----------------------|
| 2994              | .190<br>[4.8]  | ---            | .100<br>[2.5]                    | No<br>Hole            | .100<br>[2.5] | .065<br>[1.7] | .157<br>[4.0]  | .310<br>[7.9]   | 4.8mm     | 24mm Wide;<br>12mm Pitch;<br>13" Reel (1250<br>per Reel) | 2994TR                |
| 2998              | .315<br>[8.0]  | .060<br>[1.5]  | .070<br>[1.8] x<br>.200<br>[5.1] | .032<br>[.81]<br>Rad. | ---           | .114<br>[2.9] | .315<br>[8.0]  | .421<br>[10.7]  | 6.8mm     | 24mm Wide;<br>12mm Pitch;<br>13" Reel (1250<br>per Reel) | 2998TR                |
| 2996              | .520<br>[13.2] | .203<br>[12.1] | .125<br>[3.2]                    | .052<br>[1.3]         | .125<br>[3.2] | .235<br>[6.0] | .500<br>[12.7] | .700<br>[17.8]  | 11.6mm    | 32mm Wide;<br>16mm Pitch;<br>13" Reel (600<br>per Reel)  | 2996TR                |
| 3000              | .520<br>[13.2] | .203<br>[12.1] | .125<br>[3.2]                    | .047<br>[1.2]         | .125<br>[3.2] | .125<br>[3.2] | .475<br>[12.1] | .745<br>[18.9]  | 12mm      | 32mm Wide;<br>16mm Pitch;<br>13" Reel (1000<br>per Reel) | 3000TR                |
| 3012              | .664<br>[16.9] | .281<br>[7.1]  | .125<br>[3.2]                    | .047<br>[1.2]         | .125<br>[3.2] | .156<br>[4.0] | .594<br>[15.0] | .914<br>[23.2]  | 16mm      | 44mm Wide;<br>24mm Pitch;<br>13" Reel (600<br>per Reel)  | 3012TR                |
| 3002              | .831<br>[21.1] | .317<br>[8.0]  | .200<br>[5.1]                    | .093<br>[2.3]         | .200<br>[5.1] | .156<br>[4.0] | .775<br>[19.7] | 1.210<br>[30.7] | 20mm      | 44mm Wide;<br>24mm Pitch;<br>13" Reel (500<br>per Reel)  | 3002TR                |
| 3026              | .831<br>[21.1] | .317<br>[8.0]  | .190<br>[4.8]                    | .093<br>[2.3]         | .200<br>[5.1] | .085<br>[2.2] | .782<br>[19.8] | 1.210<br>[30.7] | 20mm      | 44mm Wide;<br>24mm Pitch;<br>13" Reel (500<br>per Reel)  | 3026TR                |
| 3070              | .885           |                | .200                             | .093                  | .200          | .281          | .902           | 1.265           | 20mm†     | 56mm Wide;<br>32mm Pitch;                                | 3070TR                |

|   |                 |                |               |               |               |               |                |                          |      |  |        |
|---|-----------------|----------------|---------------|---------------|---------------|---------------|----------------|--------------------------|------|--|--------|
|   | [22.5]          |                | [5.1]         | [2.3]         | [5.1]         | [7.1]         | [22.9]         | [32.1]                   |      | 13" Reel (200 per Reel)                              |        |
| 3010  | .939<br>[23.9]  | .375<br>[9.5]  | .200<br>[5.1] | .093<br>[2.3] | .200<br>[5.1] | .240<br>[6.1] | .819<br>[20.1] | 1.339<br>[34.0]          | 2354 | 56mm Wide;<br>32mm Pitch;<br>13" Reel (200 per Reel) | 3010TR |
| 3004  | .939<br>[23.9]  | .375<br>[9.5]  | .200<br>[5.1] | .093<br>[2.3] | .200<br>[5.1] | .145<br>[3.7] | .939<br>[23.9] | 1.339<br>[34.0]          | 23mm | 56mm Wide;<br>32mm Pitch;                            | 3004TR |
| 3006  | 1.000<br>[25.4] | .406<br>[10.3] | .200<br>[5.1] | .093<br>[2.3] | .200<br>[5.1] | .156<br>[4.0] | .918<br>[23.3] | 1.400<br>[35.6]          | 24mm | 13" Reel (400 per Reel)                              | 3008TR |
| 3008  | 1.000<br>[25.4] | .406<br>[10.3] | .200<br>[5.1] | .093<br>[2.3] | .200<br>[5.1] | .230<br>[5.8] | .890<br>[22.6] | 1.400<br>[35.6]          | 2450 | 56mm Wide;<br>32mm Pitch;<br>13" Reel (200 per Reel) | 3088TR |
| Material: .010 [2.54] Phosphor Bronze   |                 |                |               |               |               |               |                | Finish: Tin Nickel Plate |      |  |        |
| * All conductive polystyrene carrier tape meets ANSI/EIA - 481 standard. † 3070 supplied with insulator to accomodate 2, 20mm dia batteries |                 |                |               |               |               |               |                |                          |      |  |        |

| Battery Reference |  |               |
|-------------------|--|---------------|
| Cat. No.          |  | Cell Size     |
| <b>2994</b>       | Duracell, Eveready, Panasonic, Sony, Toshiba, Varta, Ray-O-Vac, Sanyo, Seiko   | <b>4.8mm</b>  |
| <b>2998</b>       | MC621, V364, SC621   | <b>6.8mm</b>  |
| <b>2996</b>       | SR44, LR44, 357,MS76, PX76A,G-13,303,V313  | <b>11.6mm</b> |
| <b>3000</b>       | BR1216, CR1216, BR1220, CL1220, CR1220, BR1225   | <b>12mm</b>   |
| <b>3012</b>       | BR1616, CR1612, CR1616, BR1620, CR1632   | <b>16mm</b>   |
| <b>3002</b>       | BR2016, CR2016, DL2016, BR2020, CL2020, BR2025, CR2025, DL2025, DR2032, CR2032, DL2032                                   | <b>20mm</b>   |
| <b>3026</b>       | 2016   | <b>20mm</b>   |
| <b>3070</b>       | (2)BR2016, (2)CR2016, (2)DL2016,(2) BR2020, (2)CL2020, (2)BR2025, (2)CR2025,(2) DL2025,(1) DR2032, (1) CR2032,(1) DL2032 | <b>20mm</b>   |
| <b>3010</b>       | CR2354, DL2354   | <b>2354</b>   |
| <b>3004</b>       | BR2320, CL2320, CR2320, BR2325, CR2325, DL2325, BR2330, CL2330   | <b>23mm</b>   |
| <b>3006</b>       | CR2430, DL2430   | <b>24mm</b>   |
| <b>3008</b>       | CR2450, DL2450   | <b>2450</b>   |

[Click to Request Samples](#)

[VIEW PRODUCT OVERVIEW](#)