



COAXIAL CABLE SYSTEMS

COAXIAL CABLES


**NON-PLENUM
RoHS COMPLIANT**

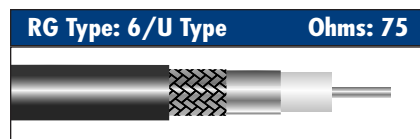


Alpha Part No.: **9804C**

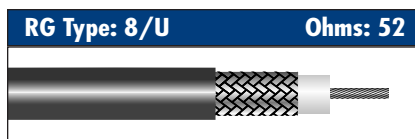


Alpha Part No.: **9008**

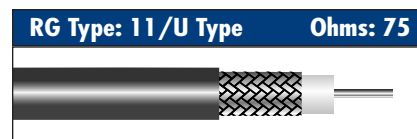


Alpha Part No.: **9847**

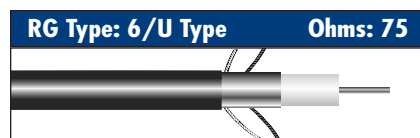


Alpha Part No.: **9843**

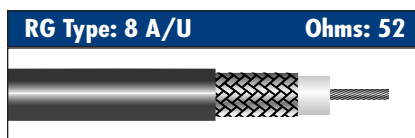


Alpha Part No.: **9008A**

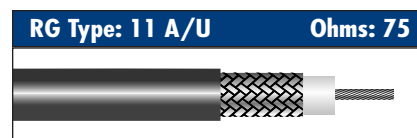


Alpha Part No.: **9011A**

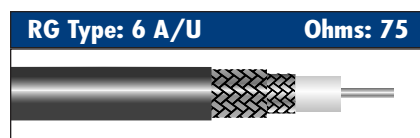

Alpha Part No.: **9006A**

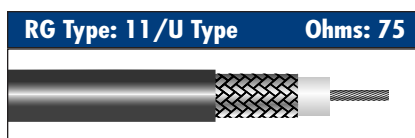

Alpha Part No.: **9011**

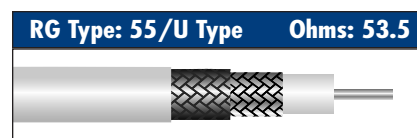

Alpha Part No.: **9055**

PRODUCT DESCRIPTION

Alpha Part No. Type	Inner Conductor AWG (mm ²)	Strand (mm)	Mat'l.♦	Dielectric Mat'l.♦	Diameter In. (mm)	Shield Mat'l.♦	Nom. Cov., %	Jacket Mat'l.♦	Diameter In. (mm)	UL Style No.	VP %	Capacitance pF/ft (pF/m)	Specifica-tions
9804C 6/U	18 (0,82)	Solid	BC	FPE	0.180 (4,57)	A/P + TC Braid	100 60	Black V	0.270 (6,86)	1354	78	17.3 (56,8)	UL Standard 13, Type CL2
9843 6/U	18 (0,82)	Solid	BC	FPE	0.180 (4,57)	A/P + 4 TC DW	100	White, Gray or Black V	0.242 (6,15)	—	78	17.3 (56,8)	—
9006A 6 A/U	21 (0,41)	Solid	CW	PE	0.185 (4,70)	Inner: SC Outer: BC	96	Black NCV	0.336 (8,53)	—	66	20.2 (66,6)	MIL-C-17D Type
9008 8/U	13 (2,88)	7/21 (7 x 0,73)	BC	PE	0.285 (7,24)	BC Braid	96	Black V	0.405 (10,28)	—	66	29.5 (96,8)	JAN-C-17A
9008A 8 A/U	13 (2,88)	7/21 (7 x 0,73)	BC	PE	0.285 (7,24)	BC Braid	96	Black NCV	0.405 (10,28)	—	66	29.8 (97,7)	MIL-C-17D Type
9011 11/U	18 (0,90)	7/26 (7 x 0,40)	TC	PE	0.285 (7,24)	BC Braid	96	Black V	0.405 (10,28)	—	66	20.6 (67,6)	—
9847 11/U	14 (2,08)	Solid	BC	FPE	0.285 (7,24)	BC Braid	81	Black PE	0.405 (10,28)	—	78	17.3 (56,8)	—
9011A 11 A/U	18 (0,90)	7/26 (7 x 0,40)	TC	PE	0.285 (7,24)	BC Braid	96	Black NCV	0.450 (10,28)	—	66	20.6 (67,6)	—
9055 55/U	20 (0,52)	Solid	BC	PE	0.116 (2,95)	Double TC Braid	99	Natural PE	0.206 (5,23)	—	66	28.8 (94,5)	—

♦Refer to Materials Abbreviation Guide on Page 283

See pages 284, 285 and the Local Area Network Section for plenum-rated coax.

ATTENUATION LEVELS

- See Chart on Page 288

SPECIFICATIONS

- RoHS Compliant



AVAILABILITY

- See Page 287 for available put-ups



Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

Web Site: www.alphawire.com
Email: info@alphawire.com