

## TDA 4282 T Quasi-Parallel Sound IC with FM IF, Sym. Input and Volume Control

The TDA 4282 T is a controlled AM amplifier with FM demodulator (to produce an intercarrier) and subsequent sound-IF limiting amplifier with coincidence demodulator, standard VCR connection and separate AF-output with volume control.

- Outstanding limiting qualities
- Connection for video recorder
- Little external circuitry

### Maximum ratings

Supply voltage	$V_S$	15	V
$t \leq 1 \text{ min}$	$V_S$	16.5	V
Thermal resistance (system-ambient air)	$R_{th SA}$	65	K/W
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-40 to 125	°C

### Operational range

Supply voltage	$V_S$	11 to 15	V
Frequency range AM part	$f_{AM}$	10 to 60	MHz
FM part	$f_{FM}$	0.01 to 12	MHz
Control voltage AM part	$V_2$	0 to 5	V
Switch current FM part	$I_B$	0.3 to 1	mA
Ambient temperature in operation	$T_{amb}$	0 to 60	°C

7

**Characteristics** ( $V_s = 15V, T_{amb} = 25^\circ C$ )

	min	typ	max	
Current consumption				
$I_s$		60	80	mA
<b>AM-part:</b>				
AGC-range				
AGC-voltage				
Input resistance				
Input impedance at max. gain				
at min. gain				
Output resistance				
<b>FM-part:</b> ( $f_2 = 5.5 \text{ MHz}; f_{mod} = 1 \text{ kHz}$ )				
Input impedance				
AM-suppression				
( $V_{i9-10} = 1 \text{ mV}; f = 12.5 \text{ MHz}; m = 30\%$ )				
Signal-to-noise ratio ( $V_{i9-10} = 10 \text{ mV}$ )				
Input voltage for limiting				
( $\Delta f = 30 \text{ kHz}$ )				
Demodulator output resistance				
Output resistance for VCR-recording				
Input resistance for VCR-playback				
Integrated resistor for deemphasis				
AF-output voltage				
( $V_i = 10 \text{ mV};$ with CDA 5.5 MC 10, $R_{q11} = 2.9 \Omega$ )				
( $\Delta f = 12.5 \text{ kHz}$ )				
AF-gain during VCR-playback				
Total harmonic distortion				
Cross talk ( $V_i = 1 \text{ mV}$ )				
$V_{12} = 2 V_{rms}$				
$V_{12} = 0.3 V_{rms}$				
Range of volume control				
$\Delta G$	0	55	5	dB
$V_2$				V
$R_{i3-4}$		10		k $\Omega$
$Z_{i20-21}$		1.8/2		k $\Omega$ /pF
$Z_{i20-21}$		1.9/0		k $\Omega$ /pF
$R_{q6}$		500		$\Omega$
$R_{q7}$		500		$\Omega$
$Z_{i9-10}$		800		$\Omega$
$a_{AM}$		42		dB
$a_{S/N}$		85		dB
$V_{i lim.}$		60		$\mu$ V
$R_{q15-16}$		5.4		k $\Omega$
$R_{q12}$			500	$\Omega$
$R_{i12}$	10			k $\Omega$
$R_{i17}$		10		k $\Omega$
$V_{q12}$		600		mV <sub>rms</sub>
$V_{q11}$	260	300		mV <sub>rms</sub>
$V_{12-11}$		0.5		
$THD_{12}$		1		%
$C_{12-11}$	50	52		dB
$C_{12-11}$	60	65		dB
$\frac{V_{AF max}}{V_{AF min}}$	70	85		dB

### Circuit description


The TDA 4282 T contains essentially two functional blocks:

1. A regulated AM amplifier with a peak rectifier to generate the AGC voltage. The AM amplifier drives an FM demodulator, at the output of which the differential sound carrier (38.9 MHz–33.4 MHz = 5.5 MHz) is available. The double sideband portions close to the carrier are suppressed. The 5.5 MHz carrier reaches the functional block via an external selection.
2. An FM limiter amplifier with coincidence demodulator, a standard VCR connector and a separate AF output with volume control.

### Pin assignment

Pin No.	Pin designation
1	Ground
2	AM-IF control
3	AM amplifier demodulator
4	AM amplifier demodulator
5	Supply voltage (plus)
6	AM amplifier sound carrier output TT 1
7	AM amplifier sound carrier output TT 2
8	AM-IF amplifier negative feedback for working point
9	AM-IF amplifier negative feedback for working point
10	FM-IF amplifier IF input
11	AF output
12	VCR connection
13	FM-IF amplifier emitter follower output
14	FM-IF amplifier emitter follower output
15	FM amplifier demodulator
16	FM amplifier demodulator
17	Deemphasis condensator
18	Volume control
19	AM-IF negative feedback for working point
20	AM-IF amplifier IF input
21	AM-IF amplifier IF input
22	AM-IF negative feedback amplifier for working point

Block diagram and test circuit

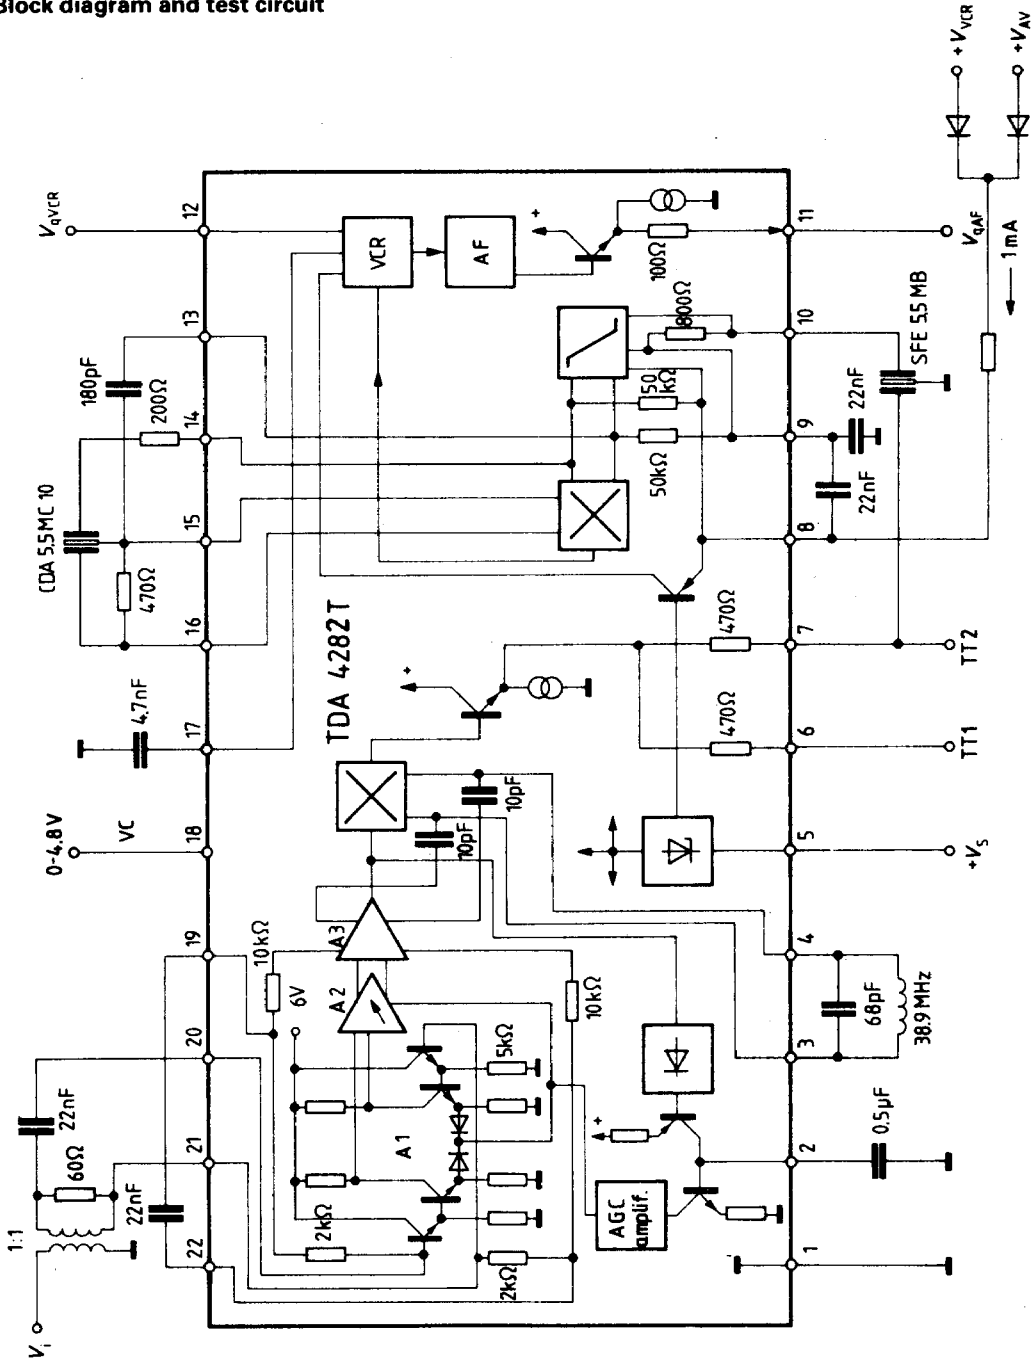

Application circuit

