
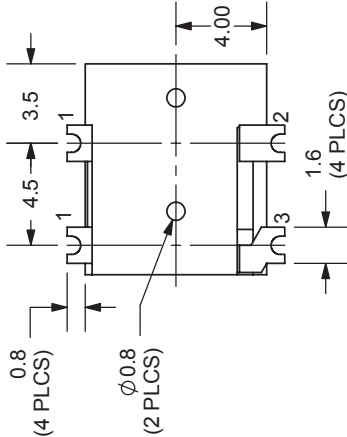
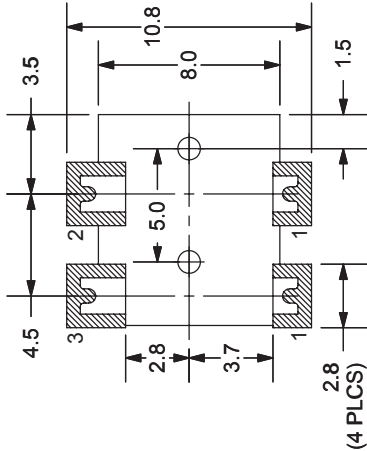

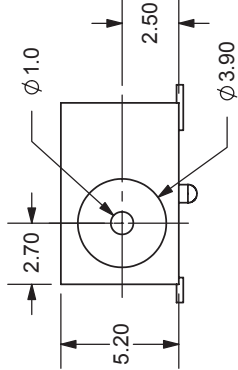
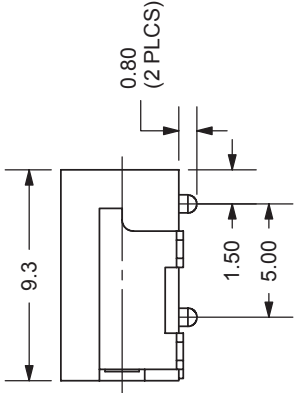


REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/13/2005



PCB LAYOUT
TOP VIEW

SPECIFICATIONS:
 RATING: 24V DC @ 5A
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 50M OHMS MIN: 100V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -25° ~ +85°C

MODEL NO.	PJ-014CH-SMT
SCHEMATIC	
CENTER PIN DIAMETER 1.0mm Dia.	

TITLE:	DC POWER JACK	REV:	A
PART NO.	PJ-014CH-SMT	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	3:1



TOLERANCE:
 X.X ±0.2mm
 X.XX ±0.1mm
 X.XXX ±0.05mm



9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

MATERIAL	PLATING
CENTER PIN	Nickel
TERMINAL 1	Silver
TERMINAL 2	Silver
TERMINAL 3	Silver
HOUSING	PA6T