


N CLIENT

N OUTIL

N D'ETUDE

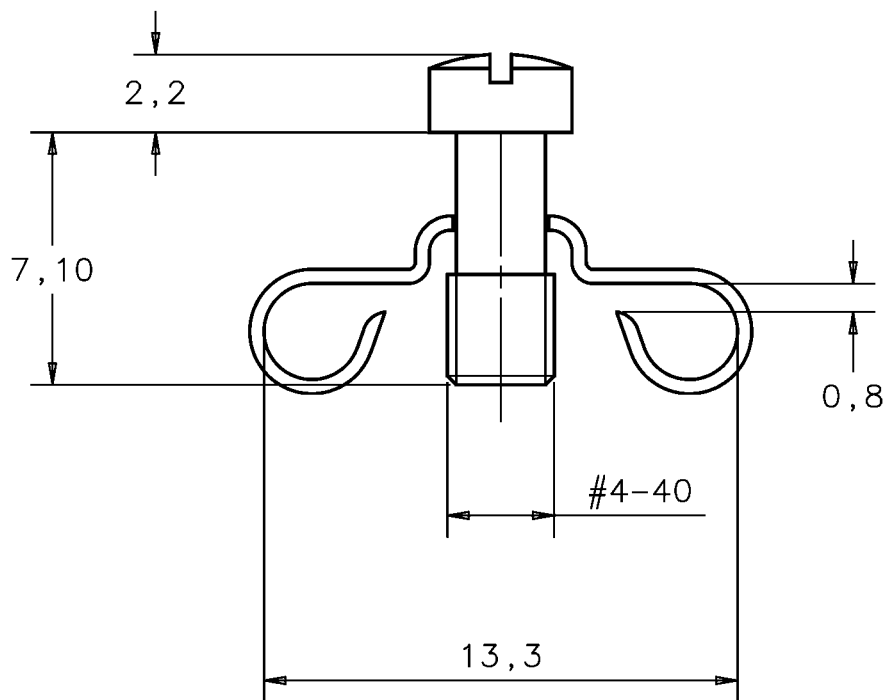

1 P/N with X=10 lockings
2 locking are necessary for one connector

Matériau : steel
Protection : tinned



17A

						TOL. GEN.	Amphenol Socapex			
						VOLUME PIECE	Usine de Dole			
						SURFACE PIECE				
						PROTECTION				
						TRAITEMENT	ECH. 5	ENS.		
A	X	CREATION PLAN	Vallot	08/02 06		MATIERE	N SERIE	017F		A
		IND. MODIFICATIONS	EXEC.	DATE	Approb				DOSSIER-notice-17A	
DATE DU TIRAGE		DESIGNATION KIT for 5 connectors FRONT INSERT MALE #4-40 FOR SIZE E.A.B.C.				L17D20419EX				