


31.5 dB, DC-4GHz, 6 Bit Parallel Digital Attenuator

Features

- Very Low DC Power Consumption
- Attenuation In Steps From 0.5 dB To 31.5 dB
- Single Or Dual Power Supply Voltages
- Parallel Data Interface
- 50 Ohm Compatible Impedance
- Space Saving LPCC™ Surface Mount Packaging

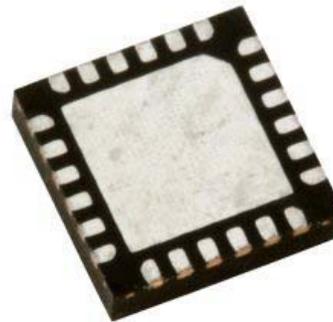

Product Description

The Honeywell HRF-AT4610 is a 6-bit digital attenuator that is ideal for use in broadband communication system applications that require accuracy, speed and low power consumption. The HRF-AT4610 is manufactured with Honeywell's patented Silicon On Insulator (SOI) CMOS manufacturing technology, which provides the performance of GaAs with the economy and integration capabilities of conventional CMOS.

HRF-AT4610 in LPCC™ Package

RF Electrical Specifications @ + 25°C

Results @ Vdd = 5.0 +/- 10%, Vss = 0 unless otherwise stated, Z0 = 50 Ohms


	Test Condition	Frequency	Minimum	Typical	Maximum	Units
Insertion Loss		DC – 1.0 GHz		2.5	2.9	dB
		1.0 – 2.5 GHz		3.0	3.5	dB
		3.0 GHz		3.6	3.9	dB
		4.0 GHz		5.5	5.8	dB
1dB Compression	VSS = 0V, Input Power	0.5 – 2.0 GHz		24		dBm
1dB Compression	VSS = - VDD, Input Power	0.5 – 2.0 GHz		29		dBm
Input IP3	VSS = 0V Two-tone inputs Up To +5 dBm @ 0 dBm Attenuation	0.5 – 2.0 GHz		38		dBm
Input IP3	V _{ss} = - V _{DD} Two-tone inputs Up To + 5 dBm @ 0 dBm Attenuation	0.5 – 2.0 GHz		>38		dBm
Return Loss*	Any Bit or Combination	DC - 3.0 GHz		11		dB
Attenuation Accuracy	All attenuation states	DC – 1.0 GHz		+/- (0.3 + 3% of programmed IL)		dB
		2.5 GHz		+/- (0.3 + 3% of programmed IL)		dB
		3.0 GHz		+/- (0.4 + 5% of programmed IL)		dB
		4.0 GHz		+/- (0.4 + 5.5% of programmed IL)		dB
Trise, Tfall*	10% To 90%			10		nS
Ton, Toff (Tpd)	50% Cntl To 90%/10%RF			15		nS
Transients	In-Band			30		mV

0.01uF Decoupling Capacitors Required On Power Supply Rails

*By design

Web Site: www.mysoiservices.com
 Email: mysoiservices@honeywell.com

Functional Schematic

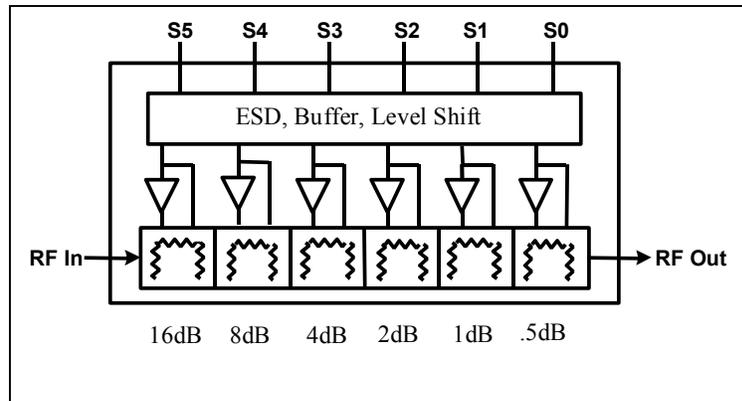

DC Electrical Specifications @ + 25°C

Parameter	Minimum	Typical	Maximum	Units
V _{DD}	3.3 ¹	5.0		V
V _{SS}			-5.0	V
I _{DD} Power Supply Current			35	uA
CMOS Logic level (0)	0		0.8	V
CMOS Logic level (1)	V _{DD} - 0.8		V _{DD}	V
Input Leakage Current			10	uA

Note 1, the performance curves are for V_{DD} = +5.0 +/- 10%

Absolute Maximum Ratings²


Parameter	Absolute Maximum	Units
Input Power	+ 35	dBm
V _{DD}	+6.0	V
V _{SS}	-5.5	V
ESD Voltage	400	V
Operating Temperature	-40 To +85	Degrees C
Storage Temperature	-65 To +125	Degrees C
Digital Inputs	V _{DD} +0.6 max to -0.6 min	V

(Note 2) Operation of this Device beyond any of these parameters may cause permanent damage.

Latch-Up: Unlike conventional CMOS digital attenuators, Honeywell's HRF-AT4610 is immune to latch-up.

ESD Protection: Although the HRF-AT4610 contains ESD protection circuitry on all digital inputs, conventional precautions should be taken to ensure that the Absolute Maximum Ratings are not exceeded.

Package Outline Drawing

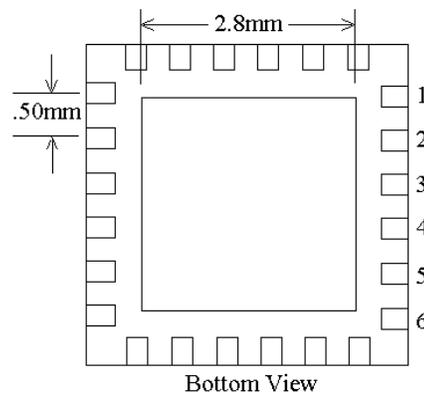

This package conforms to the LPCC™ 4 X 4 mm 24 lead body dimensions. See ASAT LPCC Marketing Outline Dwg. # DGMJ00004 Latest Rev. at <http://www.asat.com> for additional dimensional information.

Pin Configuration

Pin	Function	Pin	Function
1	VDD	13	GROUND
2	GROUND	14	GROUND
3	GROUND	15	RF OUTPUT
4	RF INPUT	16	GROUND
5	GROUND	17	VSS
6	GROUND	18	DIGITAL GROUND
7	GROUND	19	S0
8	GROUND	20	S1
9	GROUND	21	S2
10	GROUND	22	S3
11	GROUND	23	S4
12	GROUND	24	S5


Note: Bottom ground plate must be grounded for proper RF performance.

Truth Table

S5	S4	S3	S2	S1	S0	Output
0	0	0	0	0	0	Reference Input
0	0	0	0	0	1	0.5 dB
0	0	0	0	1	0	1 dB
0	0	0	1	0	0	2 dB
0	0	1	0	0	0	4 dB
0	1	0	0	0	0	8 dB
1	0	0	0	0	0	16 dB
1	1	1	1	1	1	31.5 dB

Operation: Data on parallel input "S" pins are independently buffered and presented to the RF attenuator circuits. "0" = CMOS Low, "1" = CMOS High.

Evaluation Circuit Board

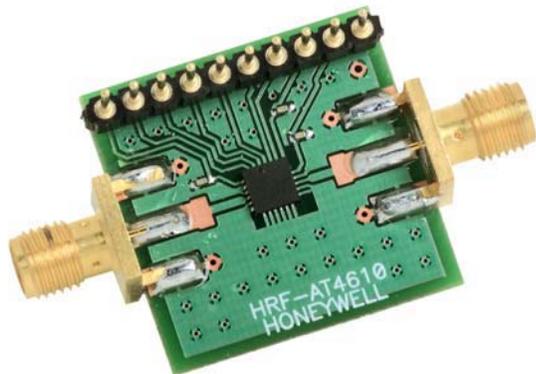


HRF-AT4610 Evaluation Board

Honeywell's evaluation board provides an easy to use method of evaluating the RF performance of our attenuator. Simply connect power, DC and RF signals to be measuring attenuator performance in less than 10 minutes.

Evaluation Circuit Board Layout Design Details


Item	Description
PCB	Impedance Matched Multi-Layer FR4
Attenuator	HRF-AT4610 Digital Attenuator
Chip Capacitor	Panasonic Model ECU-E1C103KBQ Capacitor, .01uf 0402 10% 16V
RF Connector	Johnson Connectors Model 142-0701-801 SMA RF Coaxial Connector
DC Pin	Mil-Max Model 800-10-064-10-001 Header Pins

Evaluation Circuit Board Connections

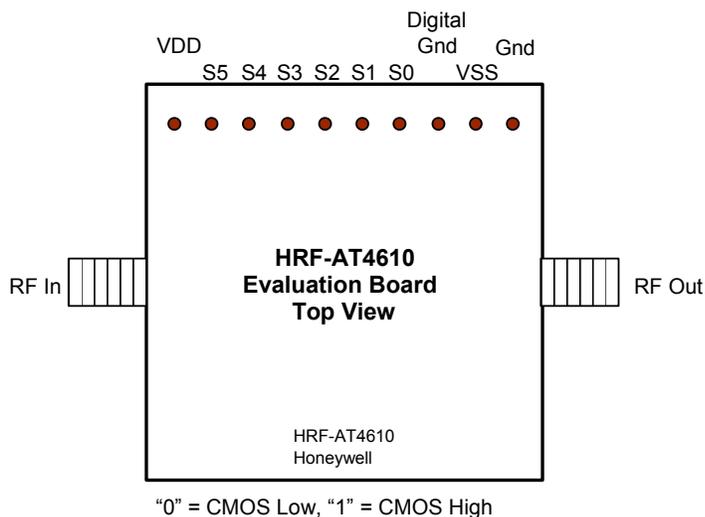


Performance Curves

Insertion Loss

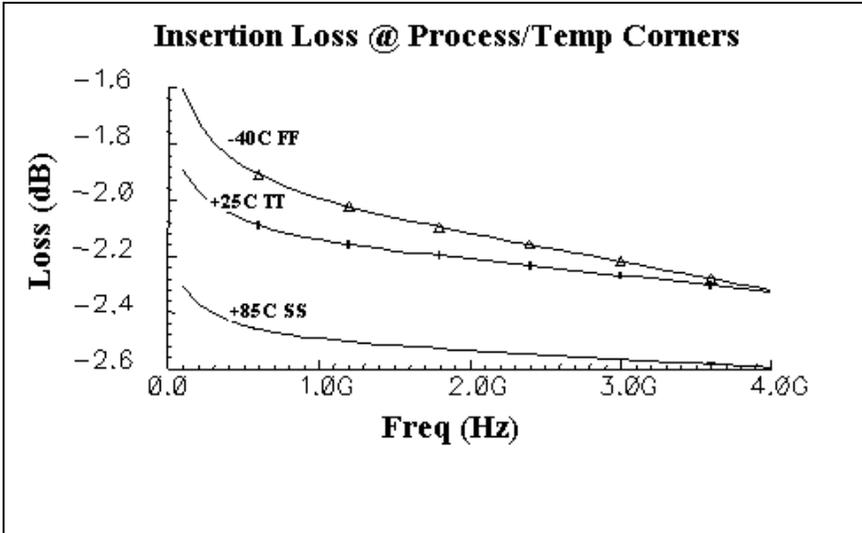


This Insertion Loss curve represents the Min/Max conditions for the “0” pass state versus all processing and temperature conditions. The Min case is at -40C with the “Fast” processing conditions. The Max case is at +85C with the “Slow” processing conditions. All other combinations fall within that band. The typical 25C case is labeled +25C TT.

Return Loss

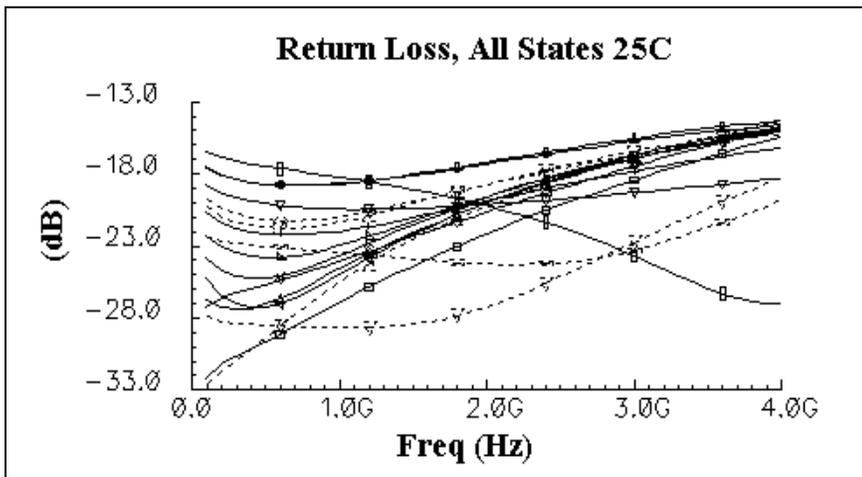


This Return Loss set of curves represents the combination of all Return Loss cases for all attenuation settings. All cases are better than -14dB Return Loss at 4GHz.


Step Accuracy

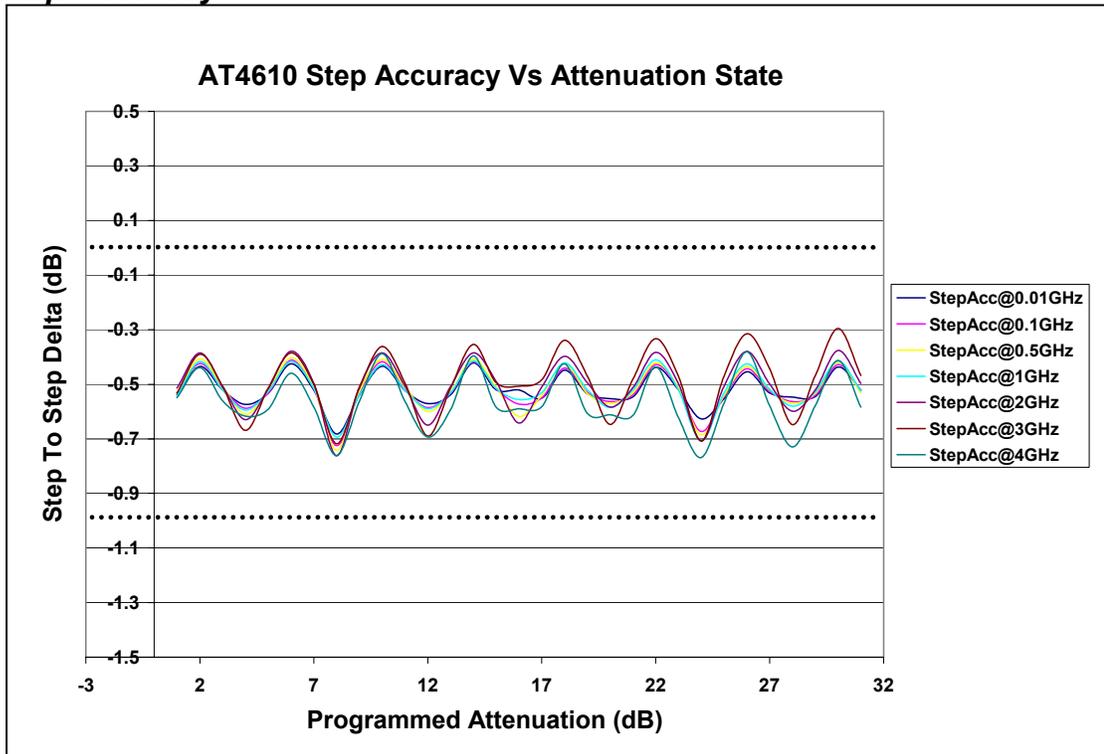


Relative Accuracy



Compression

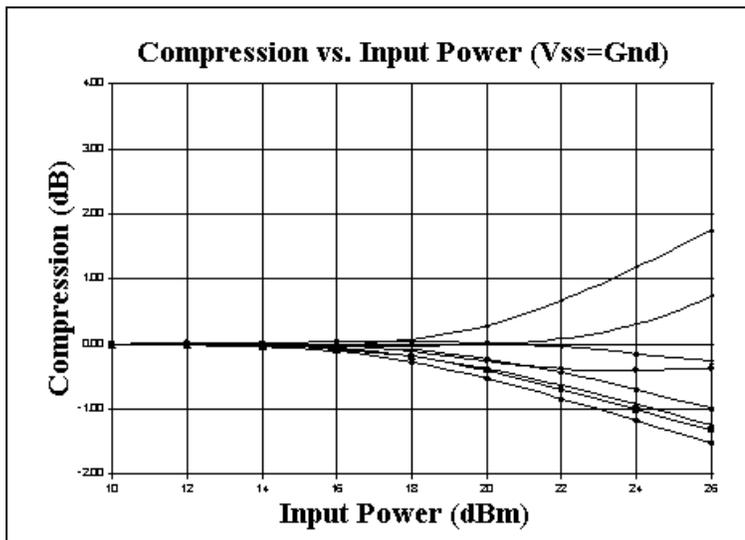

The P1dB curve shows all states with a P1dB compression at approximately 23dB input power. The conditions for this curve are $V_{dd} = +5.0v$ and $V_{ss} = 0v$. For higher P1dB compression values, supply V_{ss} with a negative voltage as shown in the next curve.

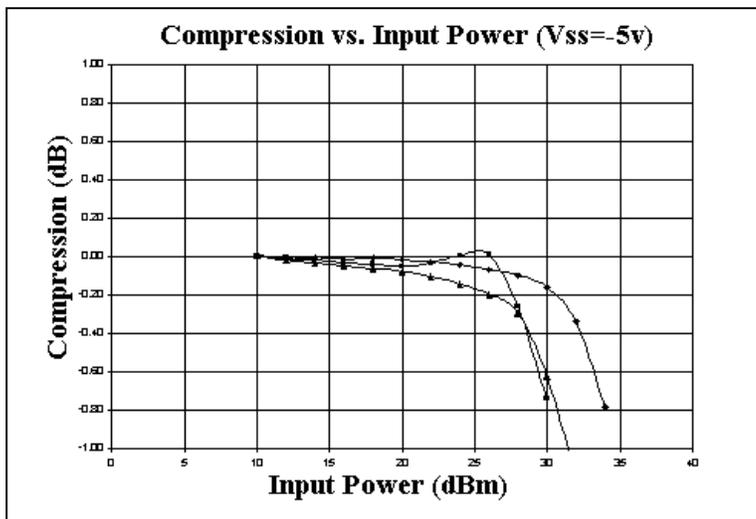

The P1dB curve shows all states with a P1dB compression at approximately 31dB input power. The conditions for this curve are $V_{dd} = +5.0v$ and $V_{ss} = -5.0v$.

Ordering Information

Ordering Number	Delivery Method	Units Per Shipment
HRF-AT4610-B	In Chip Tubes	Customer Specific, Usually Minimum Of 50 Per Chip Tube
HRF-AT4610-TR	On Tape And Reel ³	Customer Specific
HRF-AT4610-E	On Individual Engineering Evaluation Board	One Board Per Box

(Note 3) Call Honeywell for details

LPCC™ is a registered Trademark of ASAT Ltd.

Honeywell reserves the right to make changes to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.