

VS-25-A-GC-BU/BU

Order No.: 1689734



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1689734>

D-SUB panel mounting frame, shell size 3, with 25 signal contacts,
socket, gender changer, shielded, IP67 degree of protection

Commercial data

GTIN (EAN)	 4 017918 934118
sales group	D504
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 329 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/01/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	25
Insertion/withdrawal cycles	≥ 200
Color	gray
Ambient temperature (operation)	-40 °C ... 80 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	PA

Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel
Material	Plastic
Sealing material	Flat gasket: NBR; profile gasket: EPDM
Seal material	Flat gasket: NBR; profile gasket: EPDM
Degree of protection	IP67

Electrical characteristics


Rated voltage (III/3)	125 V
Rated current	5 A

Accessories


Item	Designation	Description
Protective covers		
1652211	VS-25-SD	D-SUB protective cover, shell size 3, IP54 degree of protection, for panel mounting frame and sleeve housing VS-25-...

Diagrams/Drawings

Dimensioned drawing

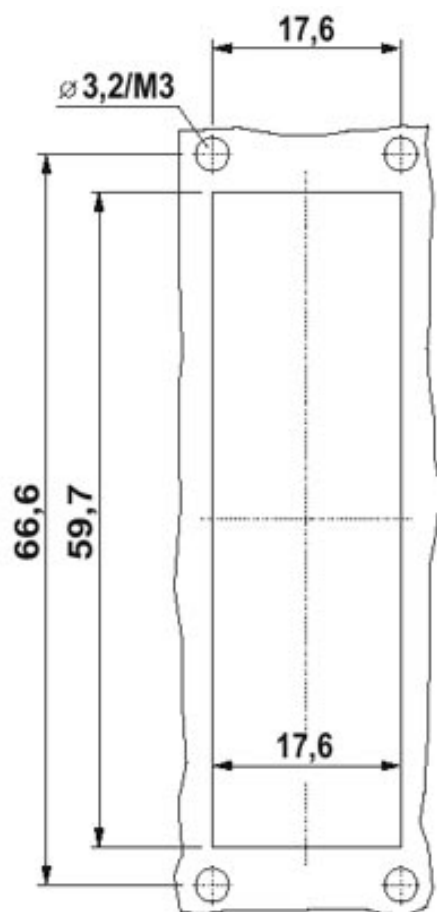

Panel cutout: VS-25-A...

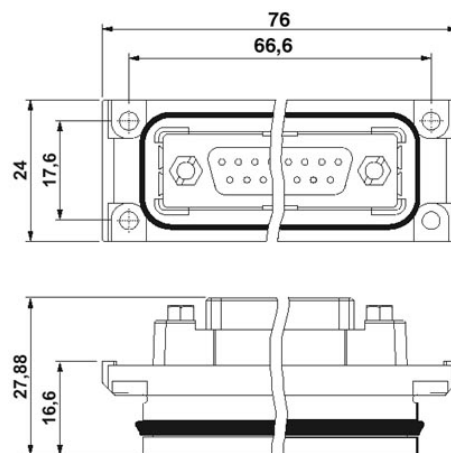

D-SUB panel mounting frame

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;