

VS-ST-CD-1,0/14,8/0,2

Order No.: 1688971

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688971>

Crimp contact, for D-SUB contact inserts with standard contact density, pin, connection cross section AWG 28 ... 24, turned, gold-plated

Commercial data

GTIN (EAN)	 4 017918 822897
sales group	D502
Pack	30 pcs.
Customs tariff	85369010
Catalog page information	Page 438 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
03/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 200
Connection method	Crimp connection
Conductor cross-section	0.08 mm ² ... 0.2 mm ²
Connection cross-section AWG	28 ... 24

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A
Insulation resistance	≥ 5 GΩ

Accessories


Item	Designation	Description
General		
1658794	VS-IET-DSUB-SIGNAL-STD	Insertion/extraction tool, to insert and extract the D-SUB standard signal contacts

Tools

1205448	CRIMPFOX RC 2,5	Crimping pliers. with positioner, for turned plug connector contacts 0.14 mm² to 2.5 mm²
---------	-----------------	--

Diagrams/Drawings

Dimensioned drawing

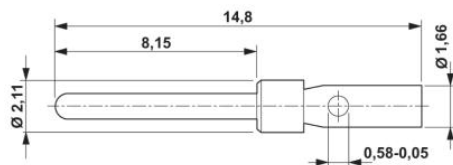

D-SUB crimp contact pin

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;