

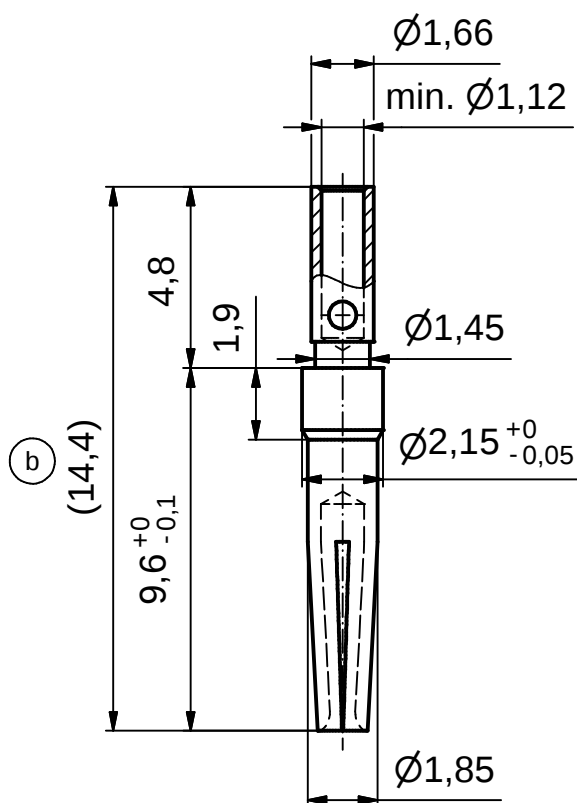


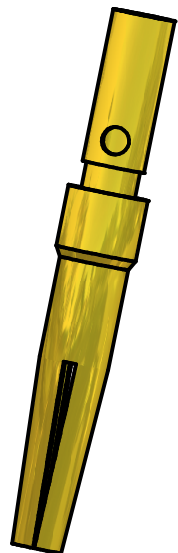


STRIPPING
DIMENSION (b)



Part-no. as per finish			
(b) min. 8µin HARD GOLD over min. 50µin NICKEL	min. 20µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	min. 50µin HARD GOLD over min. 50µin NICKEL
162A18709X	162B18709X	162C18709X	162J18709X

- (b) **NOTES:**
1. Material: Copper alloy
 2. Finish: See table
 3. Temperature range: -55 °C to +125 °C
 4. Rated current: 7.5 A maximum
 5. Contact resistance: ≤ 10 mOhm
 6. Crimping: Use crimp tool 360X10329X
With tool insert 360X20069X
Selector settings: 7 for AWG 20
6 for AWG 22
5 for AWG 24

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH								tolerance DIN ISO 2768-m				scale: 5:1	
										dim. in mm		material: SEE NOTES	
								date		name		title: CRIMP SOCKET CONTACT screw machined version accepts cable AWG 24-20	
								drawn 25.03.03		Parei			
								appd. 25.03.03		Kühle			
				norm				dwg no: Inventor 10		DIN-A4			
				d-old									
4 x b		Ä 3698		25.08.10		Lehm.							
a		Origin											
rev.		description		date		name		part no: SEE TABLE					