

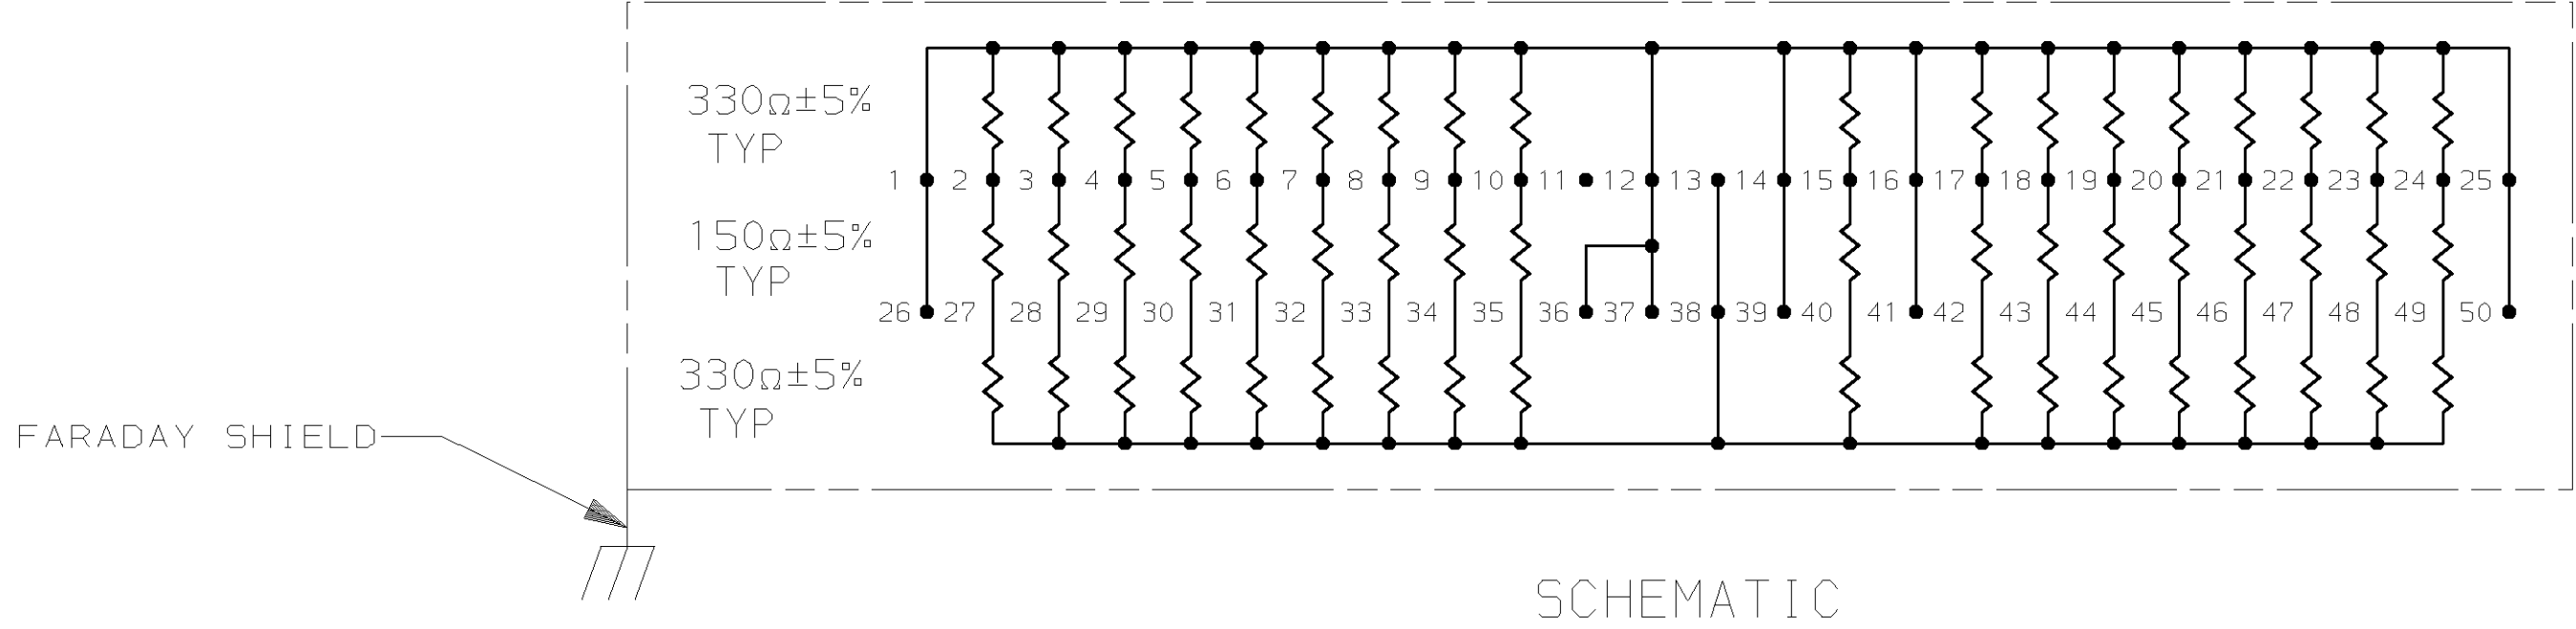
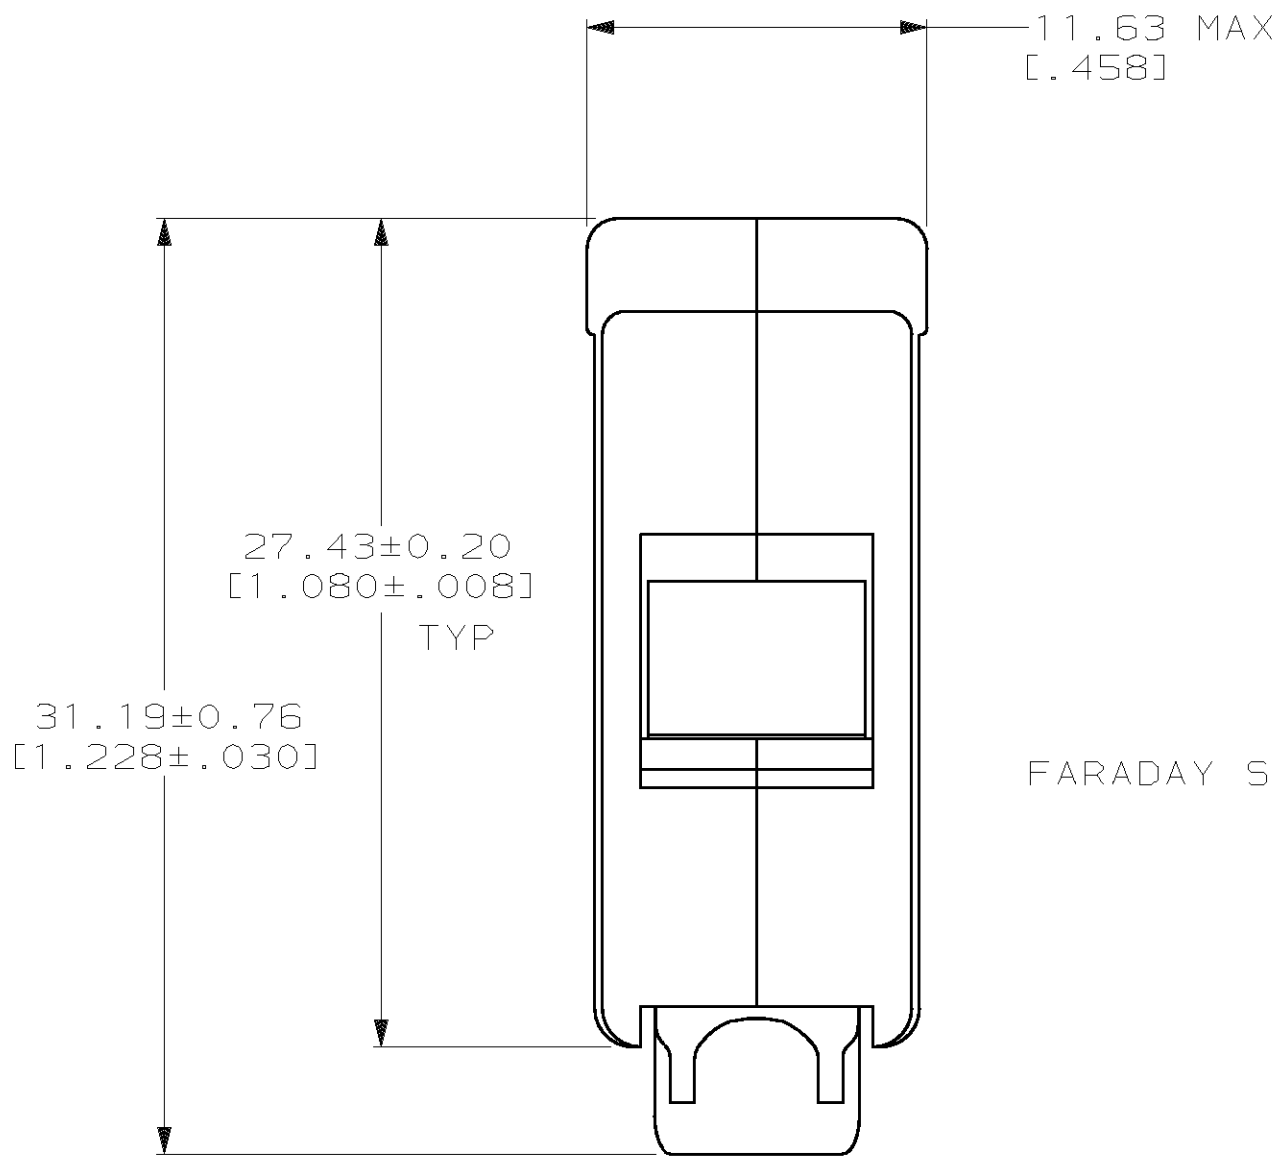


MOD		LOC		DIST		P		F		ZONE		LTR		REVISIONS										DATE		APPD	
5		GP		00										DESCRIPTION										2-92		DW	
												O		RLSE WAS 91-4163-085-01, NPR 3877										07/29/92		PR	
												A		REVISED ECN BD6418										10/28/93		PR	
												B		REV PER 0020-601-93													
												C		REV PER EC 051A-0168-00										06/28/00		MG	

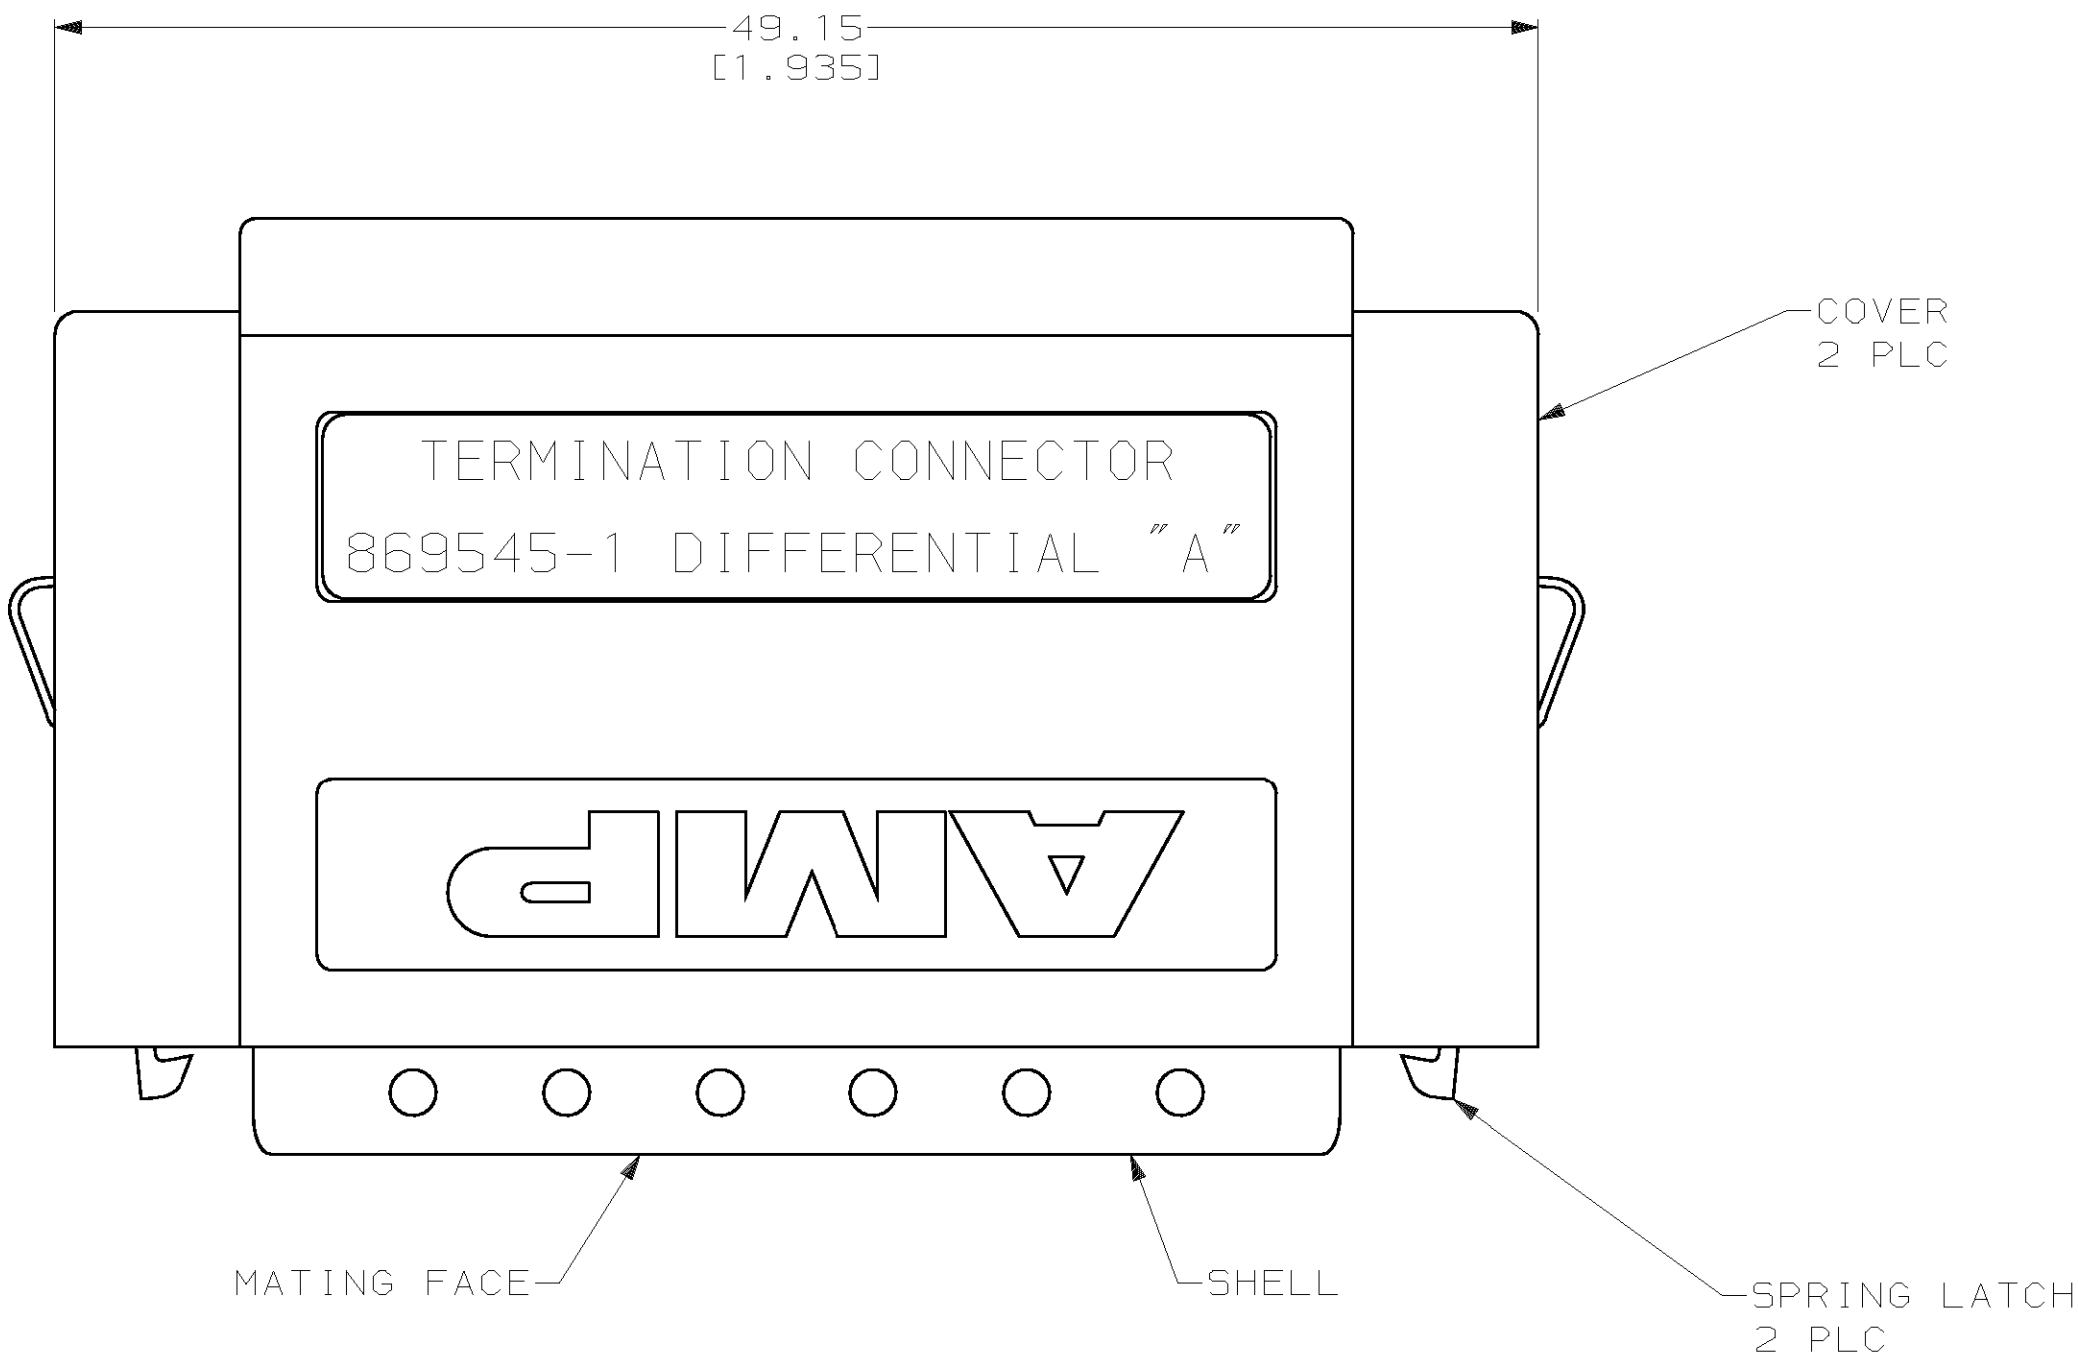

- ① SHELL: CARBON STEEL; PIN CONTACT: PHOSPHOR BRONZE; HOUSING: POLYESTER, BLACK; RESISTOR NETWORK: THICK FILM RESISTOR COMPOSITION ON ALUMINA SUBSTRATE. SPRING LATCH: STAINLESS STEEL; COVER: ABS, GRAY, UL 94V-0 RATED.
- ② 5.08μm[.000200] MIN TIN-NICKEL OVER 1.27μm[.000050] MIN COPPER.
- ③ 0.76μm[.000030] MIN GOLD FOR A LENGTH OF 3.35[.132] MIN FROM MATING END OVER 1.27μm[.000050] MIN NICKEL.

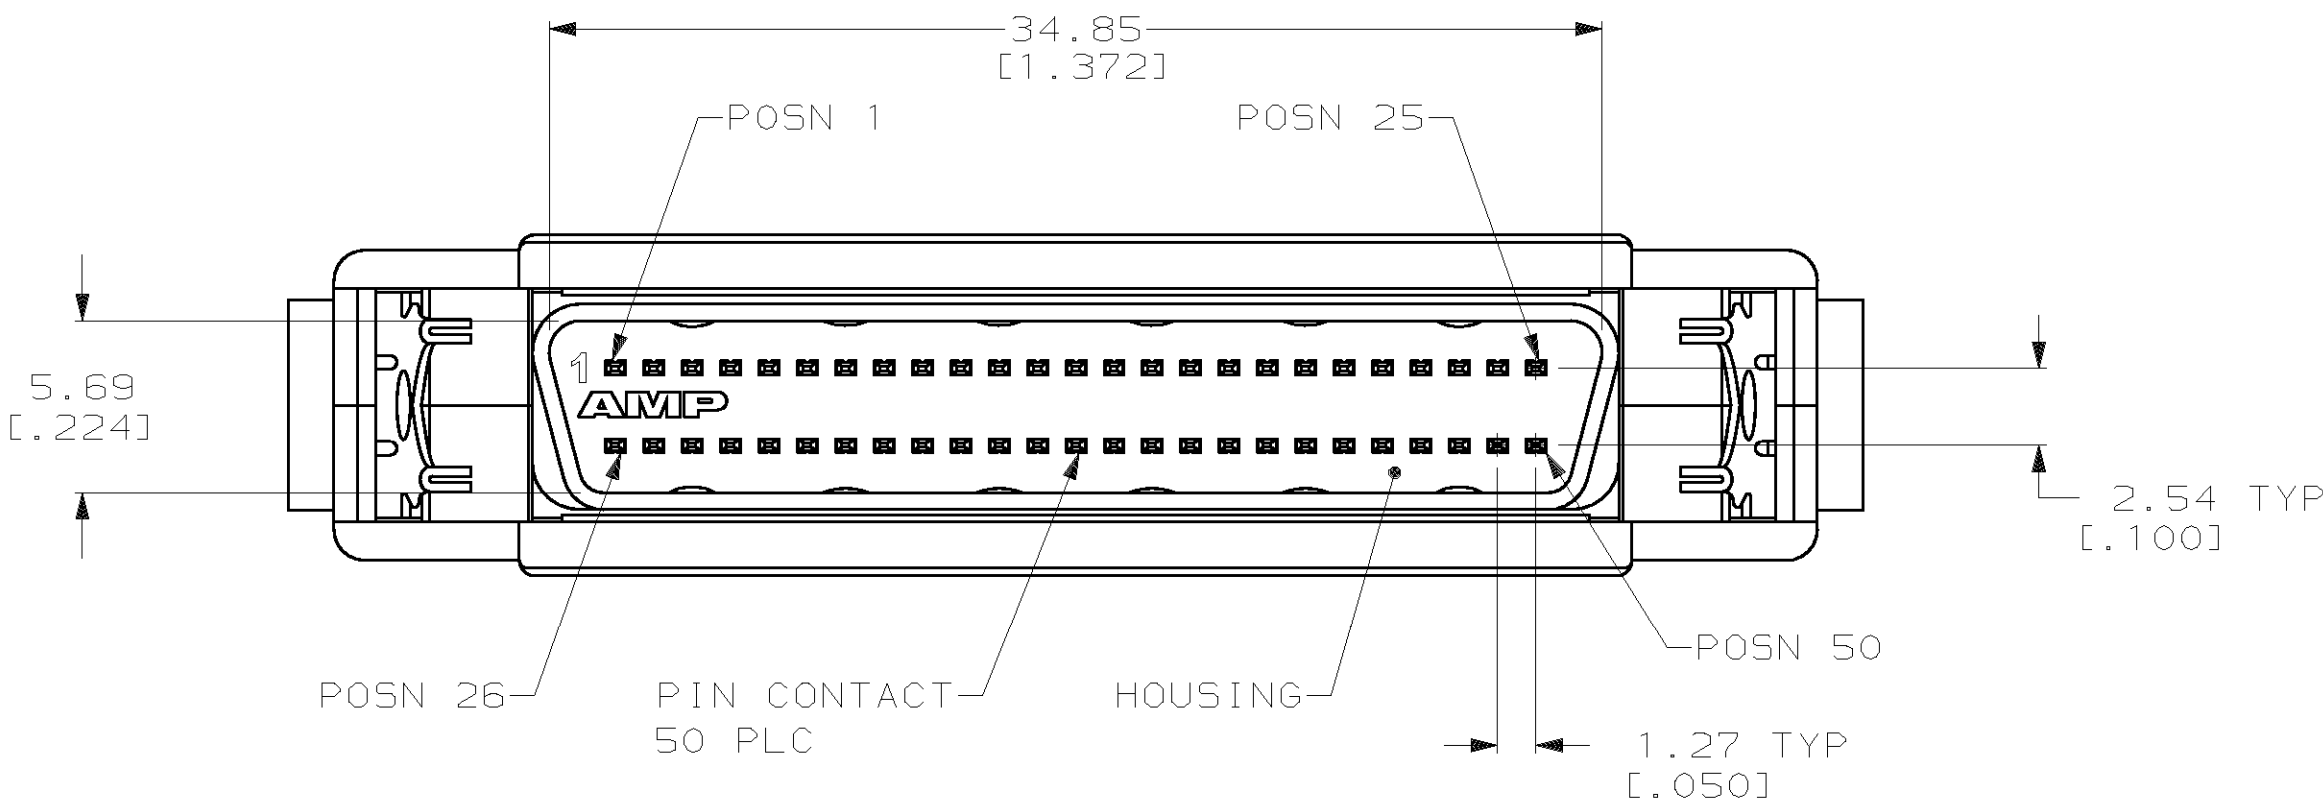

										869545-1			
										PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25[.010] 3 PLC DEC ± - ANGLES ± -				DR 2-22-92 J MCCLINTON		AMP AMP Incorporated Harrisburg, PA 17105-3608							
				CHK 4-1-92 R STONE									
				APPD 4-2-92 D WEYANDT								NAME	
				APPD 4-2-92 J FULPONI								PLUG ASSEMBLY, 50 POSITION, .050 SERIES AMPLIMITE™, TERMINATOR	
PRODUCT SPEC -													
APPLICATION SPEC -		SIZE D		CAGE CODE 00779		DRAWING NO 869545							
MATERIAL 1				WEIGHT -		SCALE 4:1				SHEET 1 OF 1			
FINISH SHELL: 2 CONTACTS: 3													