
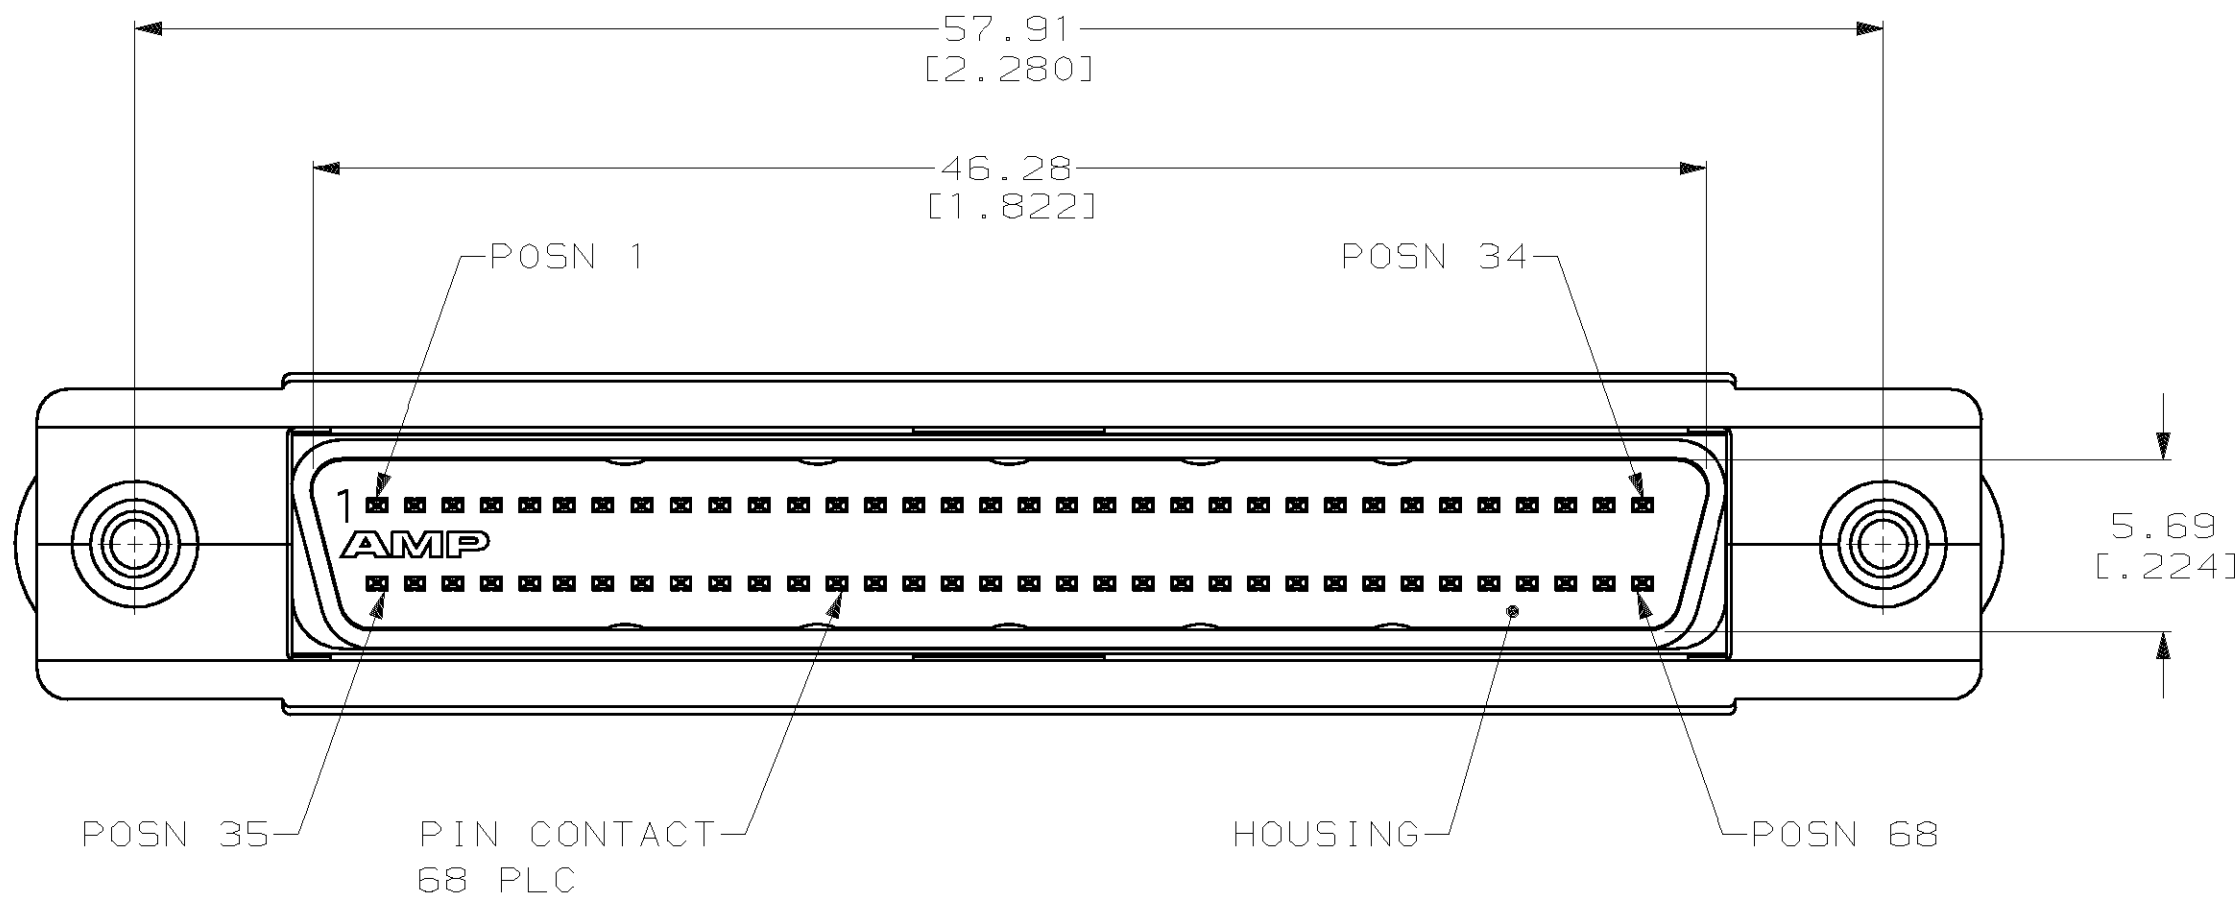
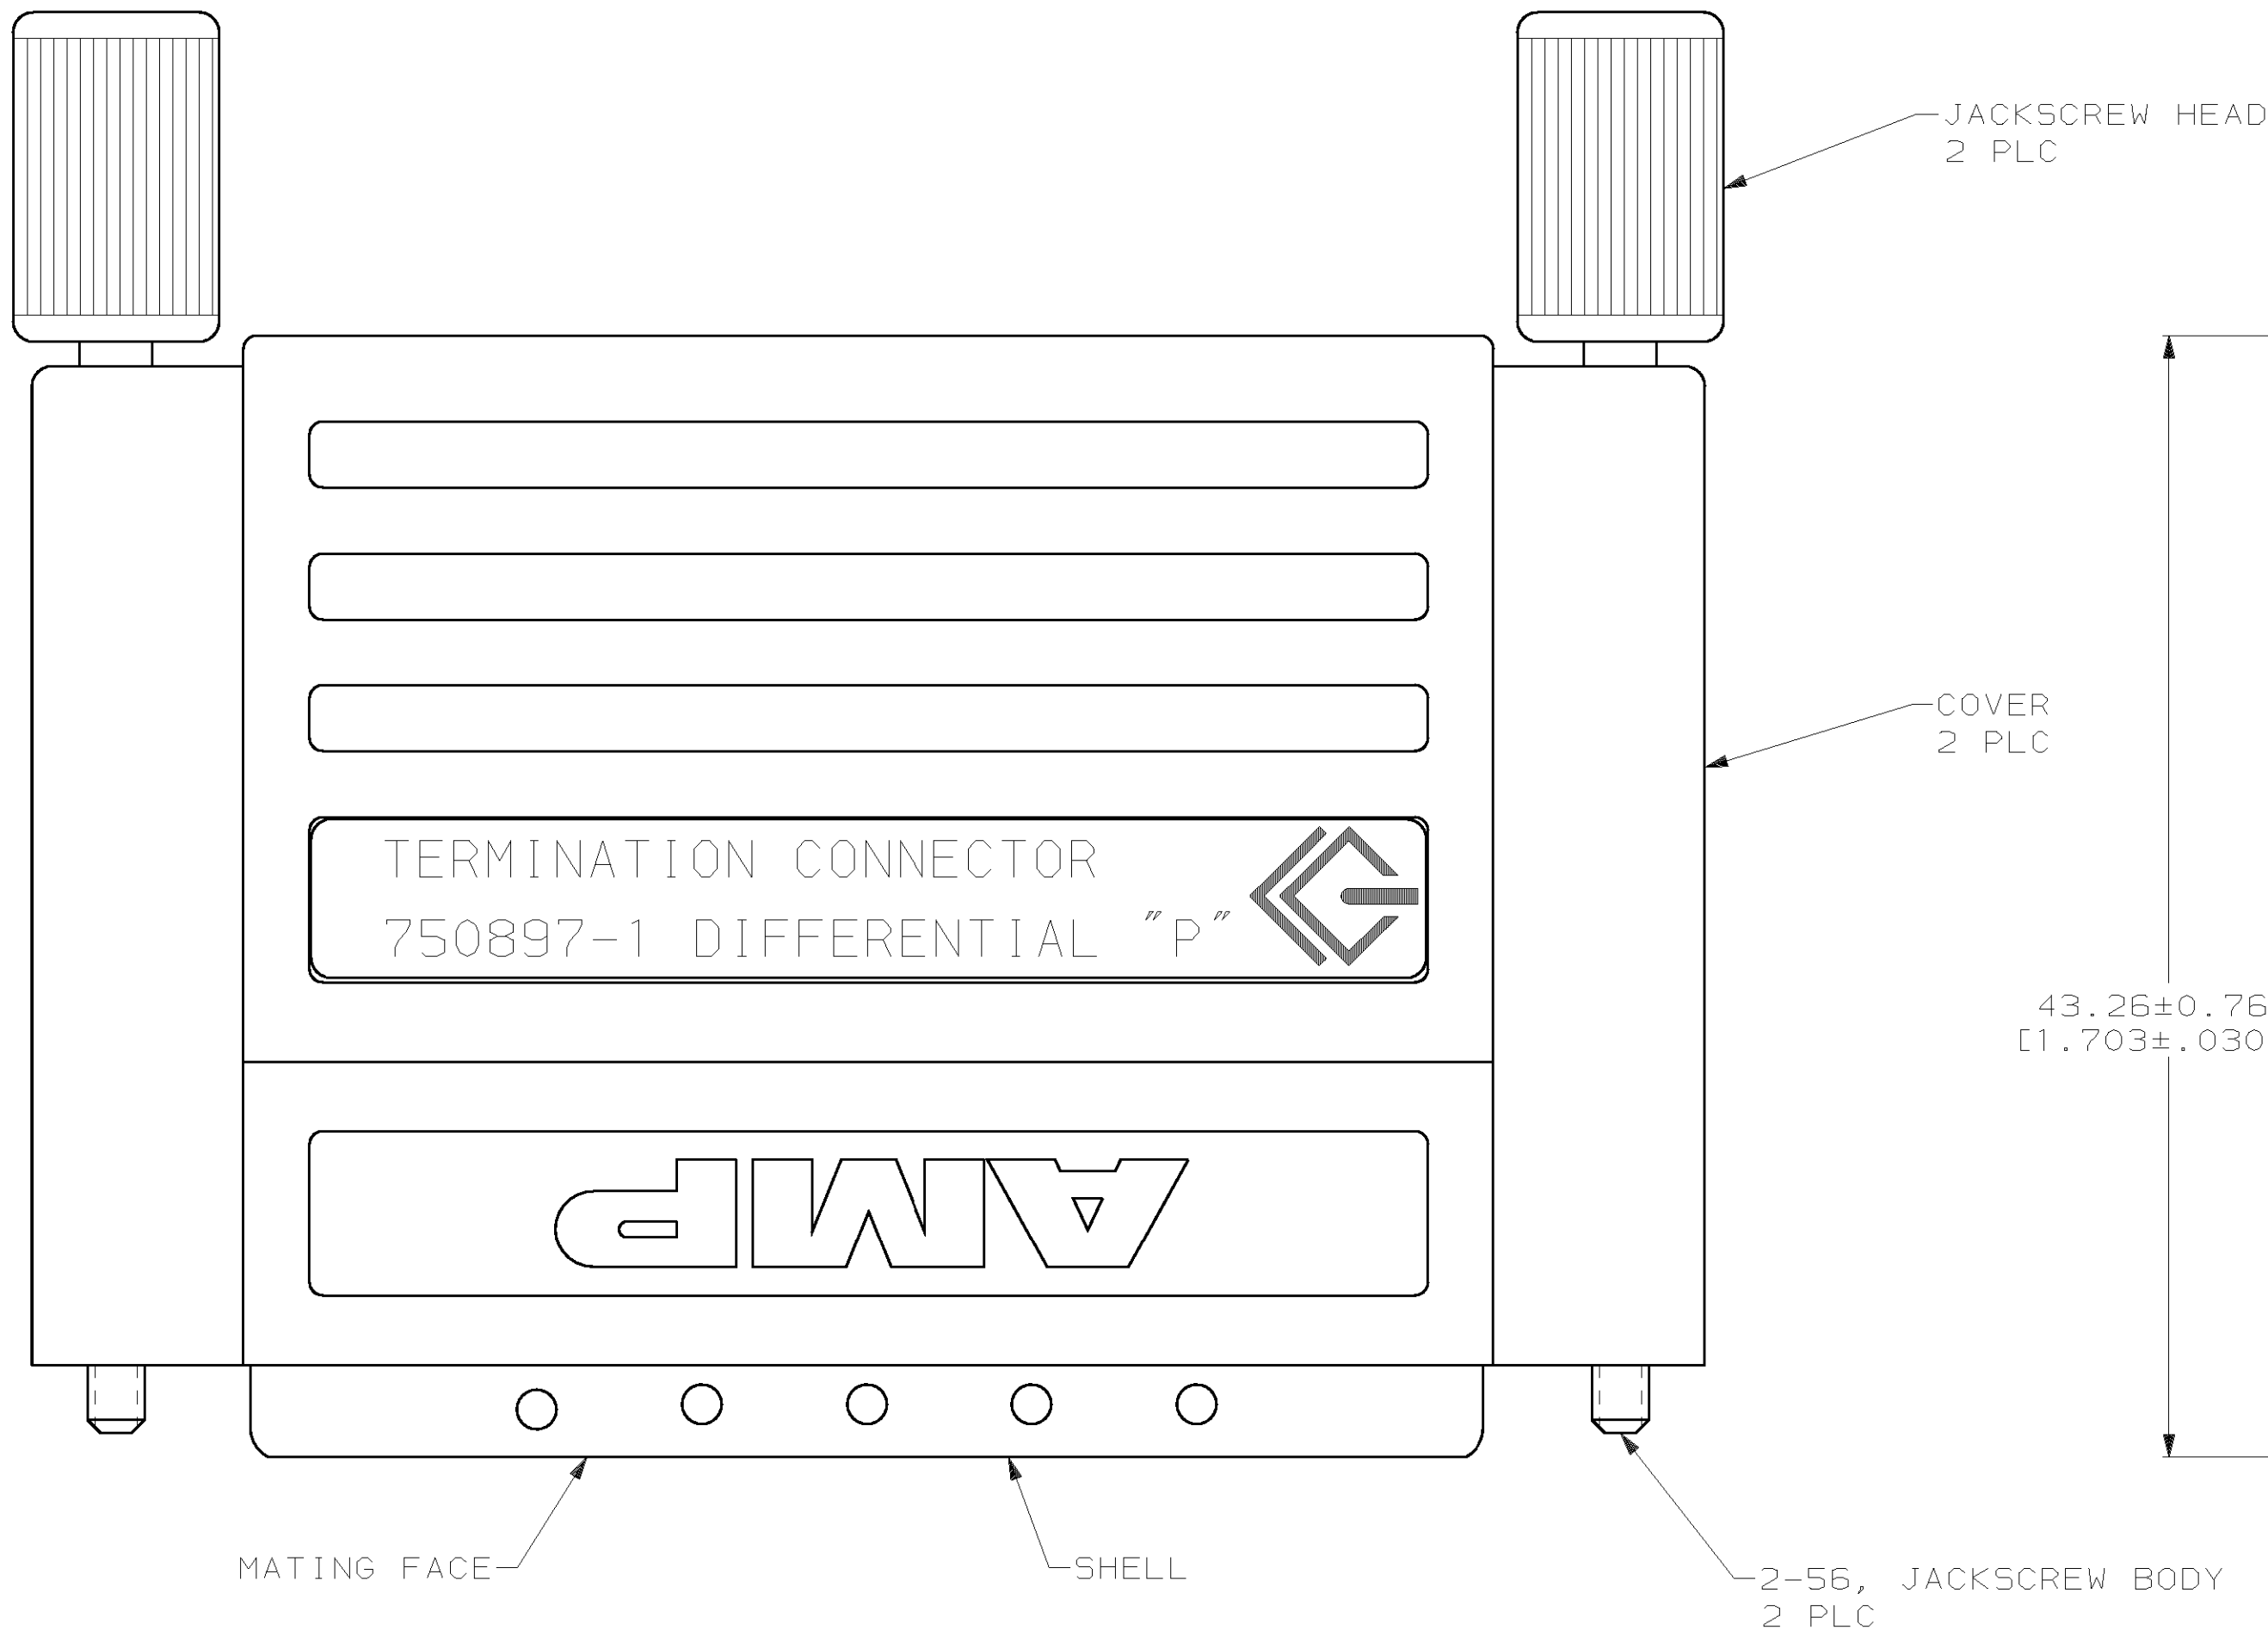



LOC	DIST	REVISIONS							
		P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
BD	62				D	REV PER EC0020-1589-93	03/23/94	MP	
					E	REV PER EC 0020-0186-95	05/23/95	RF	
					F	REV PER EC 0640-166-99	24 JUN 99	JK	
					G	REV PER EC 051A-0168-00	23 JUN 00	MG	

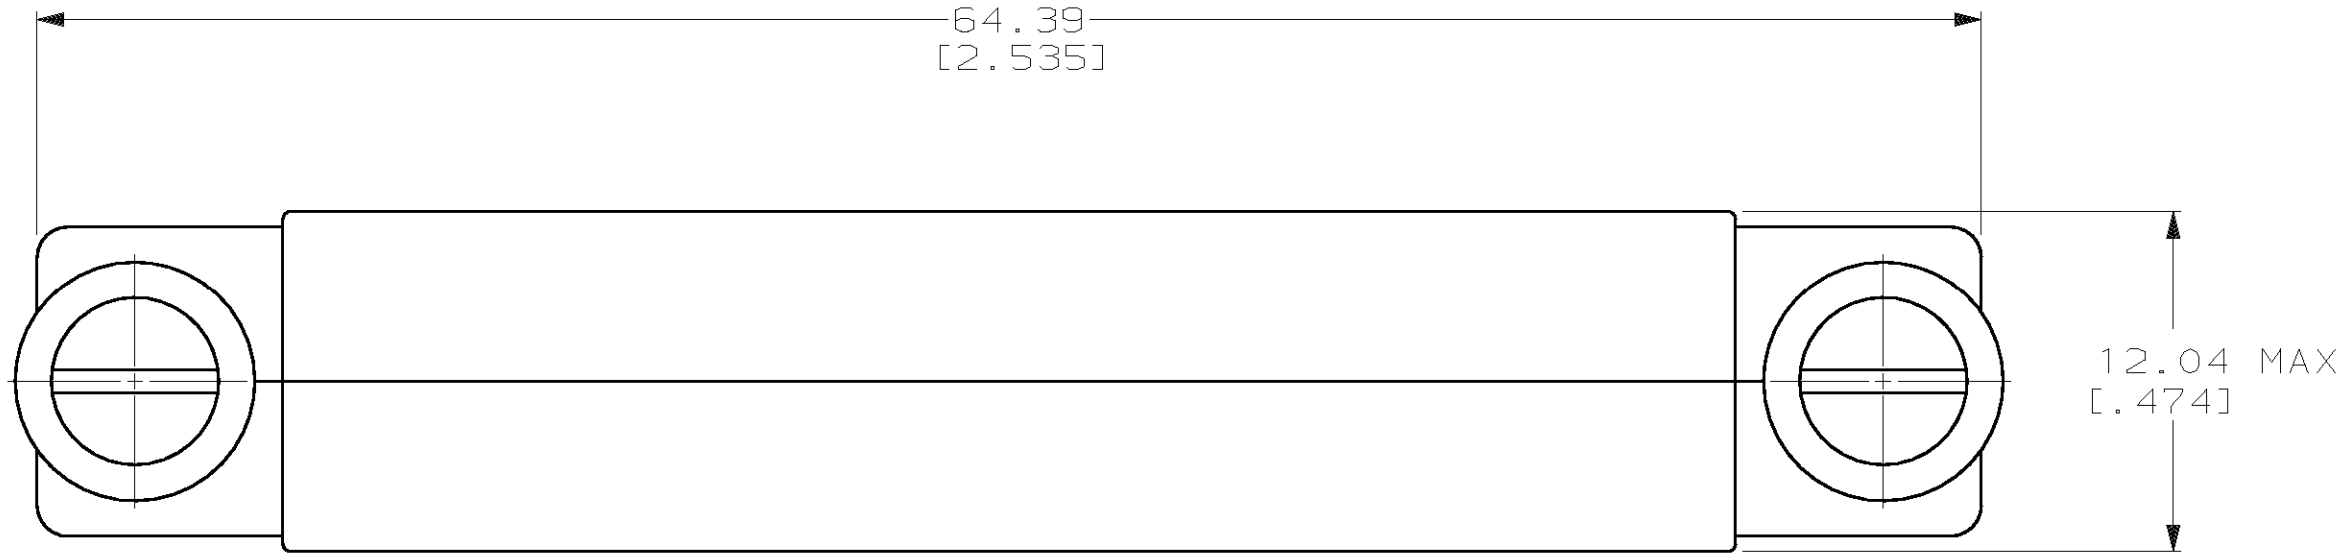

330Ω, .125 WATTS, ±5%
27 PLC

150Ω, .125 WATTS, ±5%
27 PLC

330Ω, .125 WATTS, ±5%
27 PLC

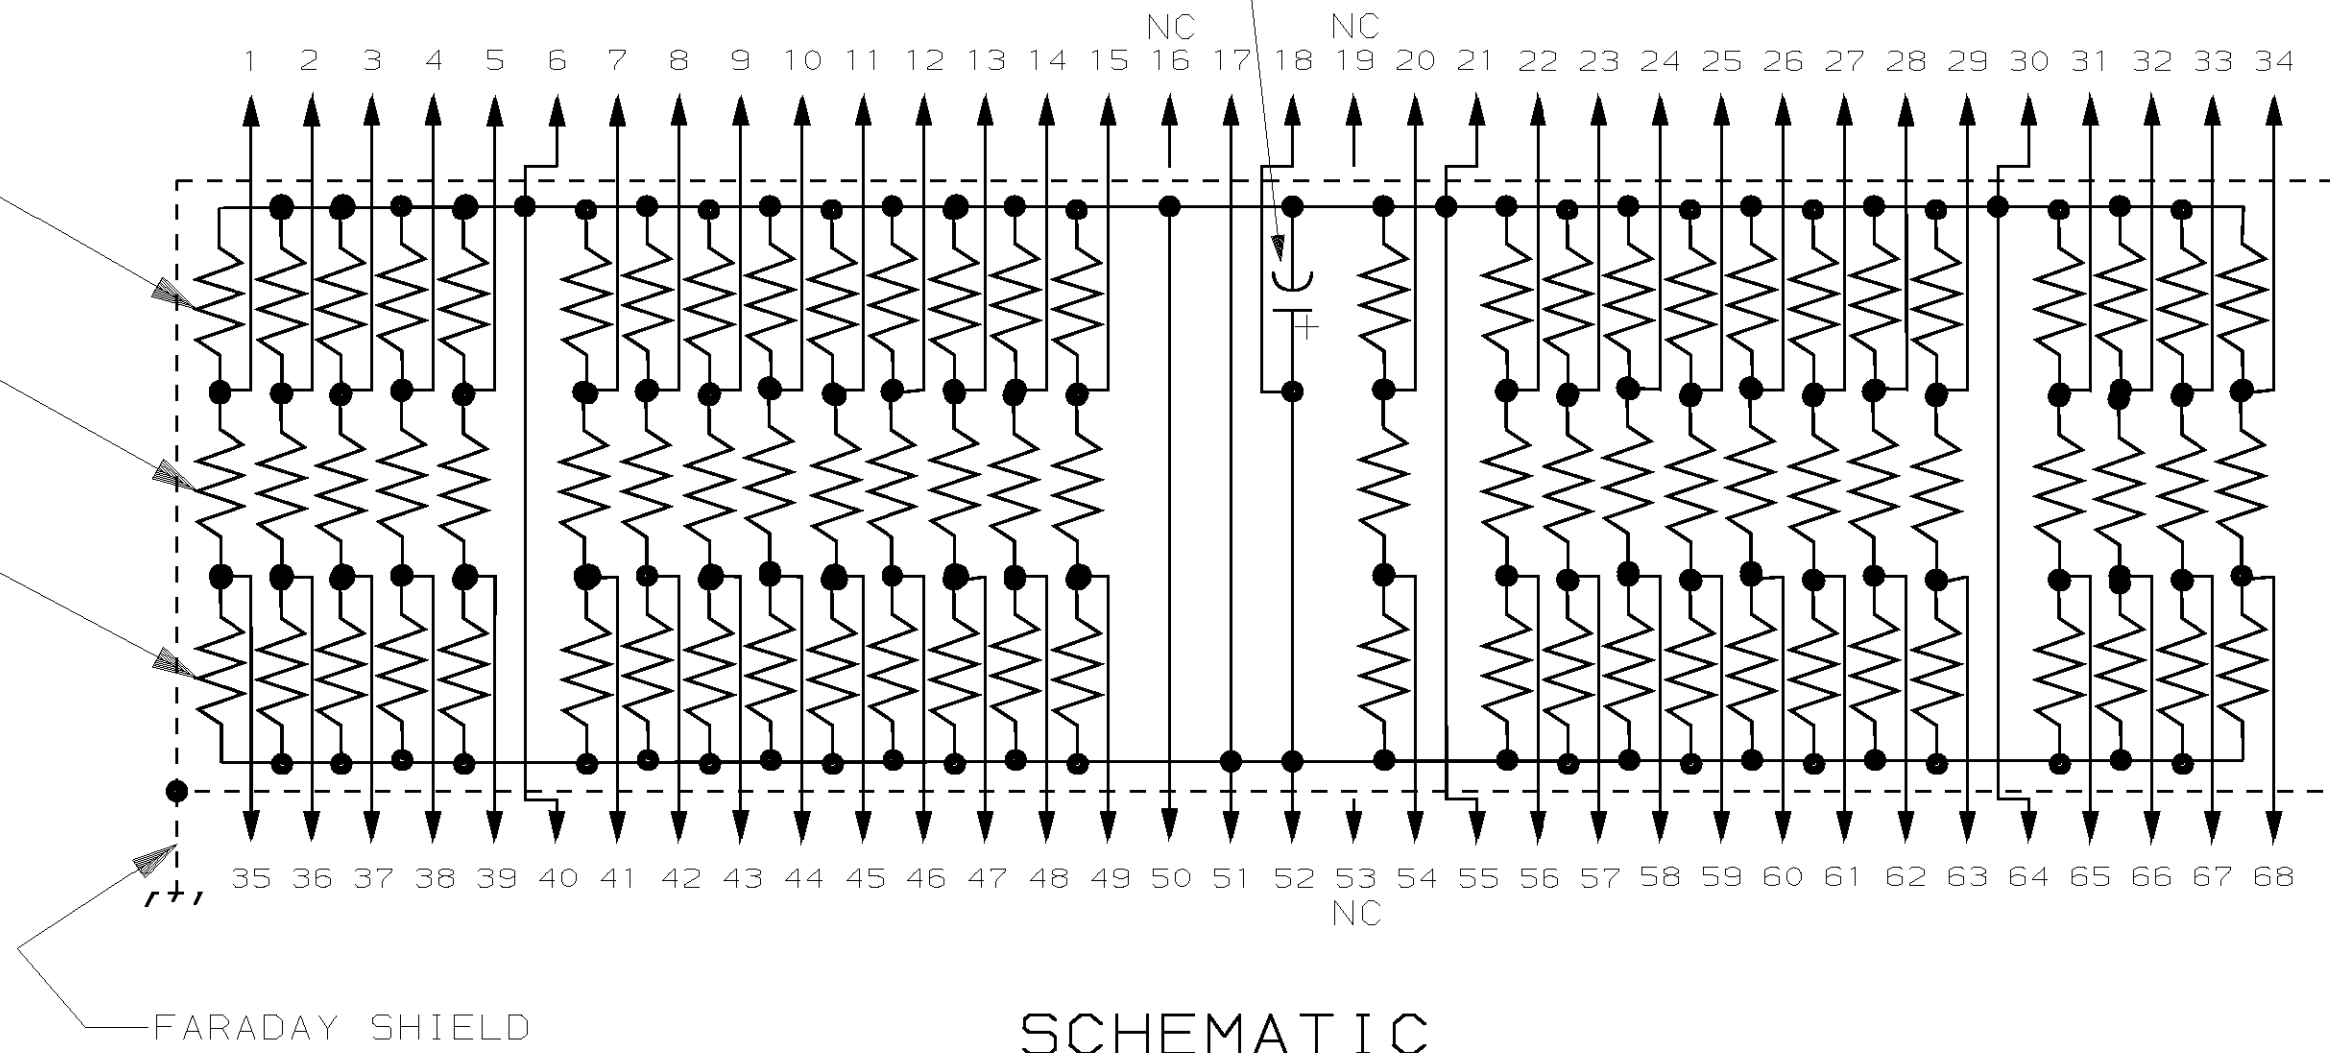

- 1 SHELL: CARBON STEEL; PIN CONTACT: PHOSPHOR BRONZE; HOUSING: POLYESTER, BLACK; RESISTOR: THICK FILM RESISTOR COMPOSITION ON ALUMINA SUBSTRATE. JACKSCREW BODY: STAINLESS STEEL; JACKSCREW HEAD: PVC; COVER: ABS; SHIELD: COPPER.
- 2 5.08μm[.000200] MIN TIN-NICKEL OVER 1.27μm[.000050] MIN COPPER.
- 3 0.76μm[.000030] MIN GOLD FOR A LENGTH OF 3.35[.132] MIN FROM MATING END OVER 1.27μm[.000050] MIN NICKEL.

				750897-1		
				PART NO		
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.25[.010] 3 PLC DEC ± - ANGLES ± -		DR 8-1-91 J McCLINTON		AMP AMP Incorporated Harrisburg, PA 17105-3608		
		CHK 8-12-91 R.STONE				
		APPD 8-15-91 W.D.FLESHMAN				
MATERIAL		APPD 8-15-91 C.ROHDE		NAME PLUG ASSEMBLY, 68 POSITION, .050 SERIES AMPLIMITE™ TERMINATOR		
1		PRODUCT SPEC -				
FINISH		APPLICATION SPEC				
SHELL: 2		-		SIZE	CAGE CODE	DRAWING NO
CONTACTS: 3		WEIGHT _		D	00779	750897
				SCALE	4:1	SHEET
						1 OF 1