

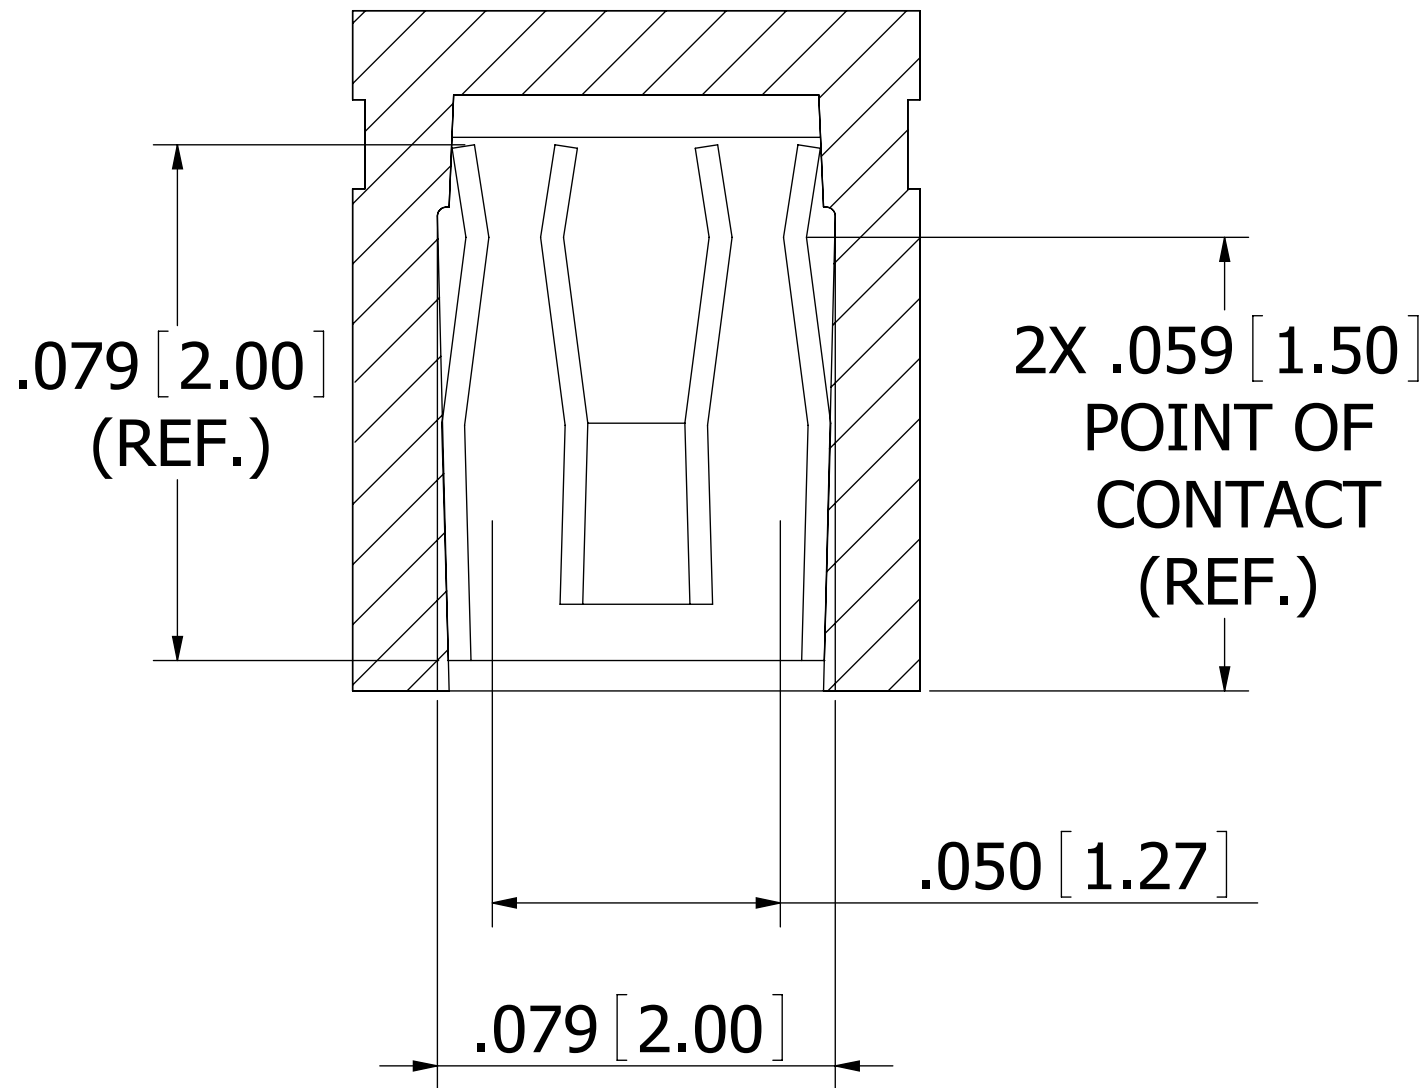
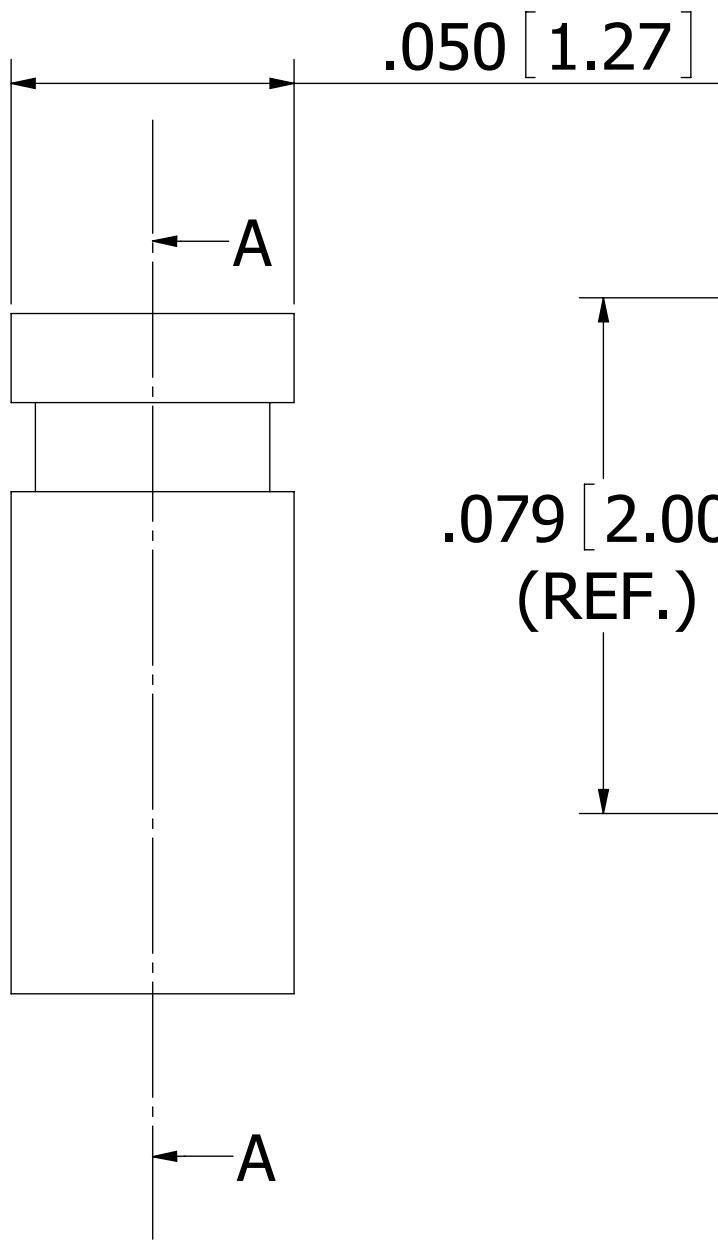
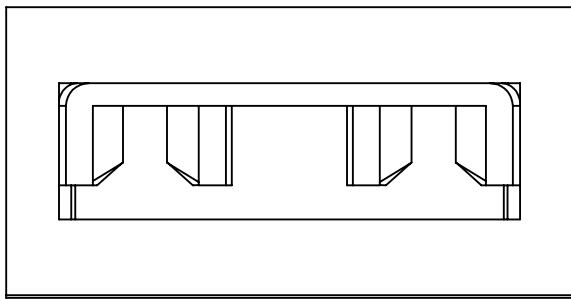



| REVISIONS | | | | |
|-----------|---------|-----------------|------------|----|
| REV. | ECO. NO | DESCRIPTION | DATE | BY |
| A | 2144 | INITIAL RELEASE | 07/16/2010 | LH |

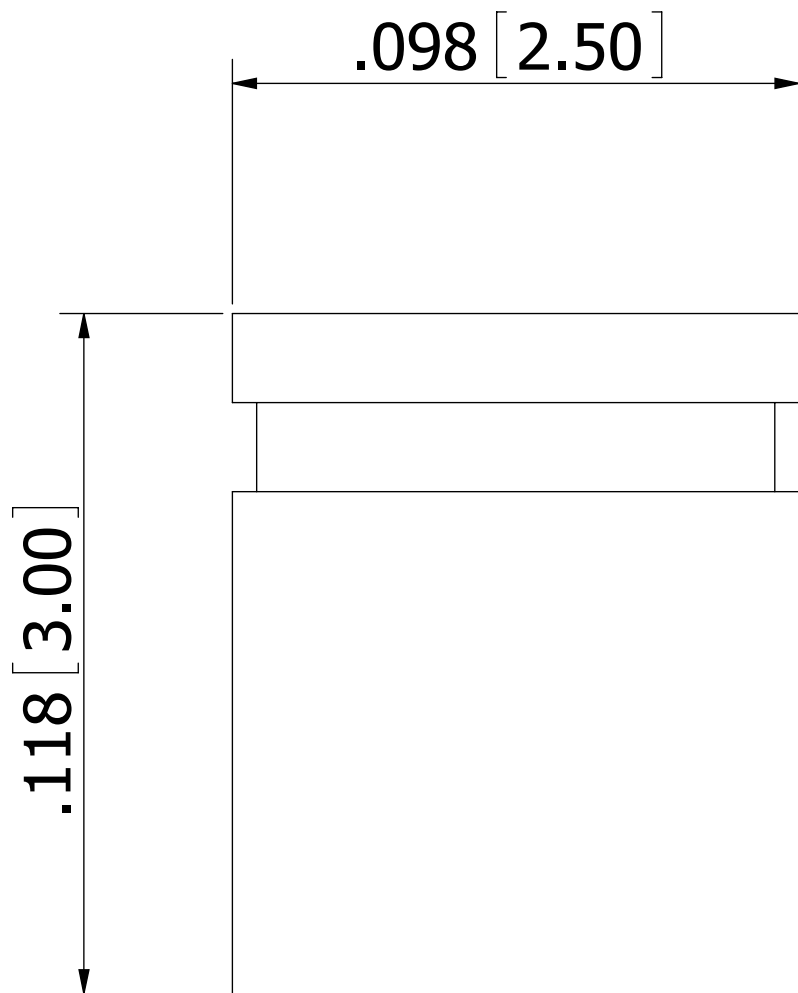

SECTION A - A

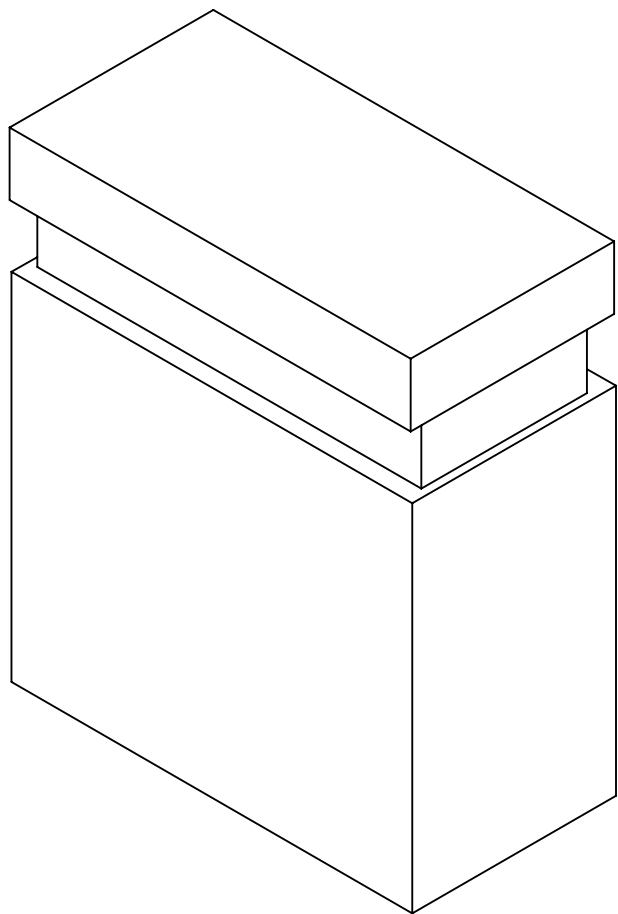


- NOTES:
1. INSULATOR MATERIAL: NYLON 66.
 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
 3. PLATING: GOLD FLASH OVERALL.
 4. UL FLAMMABILITY RATING: 94V-2.
 5. DIELECTRIC WITHSTANDING VOLTAGE: 650V AC.
 6. CURRENT RATING: 1 AMP PER CONTACT.
 7. CONTACT RESISTANCE: 30 MILLI OHMS MAX.
 8. INSULATION RESISTANCE: 1000 MEGA OHMS.
 9. DOUBLE TUNING FORK TYPE CONTACT, ACCOMMODATES .016"[0.40mm] SQ PINS, .050"[1.27mm] PITCH LOW PROFILE MINI TYPE.




RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES[MM]
TOLERANCES:
ANGULAR: $\pm 30^\circ$
.XX= $\pm .012$ [.30]
.XXX= $\pm .008$ [.20]
.XXXX= $\pm .004$ [.10]

INTERPRET DIMENSIONS AND GEOMETRIC
TOLERANCING
PER: ASME Y14.5M-2009

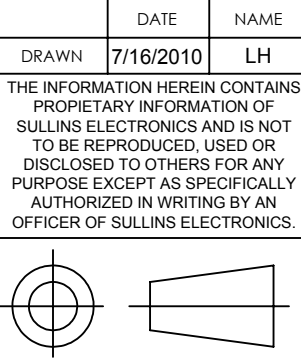

| | | | |
|---|----------|---------------------------------------|-----|
|  | | SULLINS CONNECTOR SOLUTIONS | |
| DESCRIPTION | | | |
| MINI SHUNT, .050" CC, CLOSED TOP | | | |
| PART NUMBER | | | |
| NPB02SVAN-RC | | | |
| SIZE | DWG. NO. | | REV |
| C | 11499 | | A |
| SCALE: 16:1 | | SHEET 1 OF 1 | |