74VHC112 Dual J-K Flip-Flops with Preset and Clear

# FAIRCHILD

SEMICONDUCTOR TM

# 74VHC112 Dual J-K Flip-Flops with Preset and Clear

## **General Description**

The VHC112 is an advanced high speed CMOS device fabricated with silicon gate CMOS technology. It achieves the high-speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation.

The VHC112 contains two independent, high-speed JK flipflops with Direct Set and Clear inputs. Synchronous state changes are initiated by the falling edge of the clock. Triggering occurs at a voltage level of the clock and is not directly related to transition time. The J and K inputs can change when the clock is in either state without affecting the flip-flop, provided that they are in the desired state during the recommended setup and hold times relative to the falling edge of the clock. The LOW signal on PR or CLR prevents clocking and forces Q and Q HIGH, respectively. Simultaneous LOW signals on PR and CLR force both Q and  $\overline{\mathbf{Q}}$  HIGH.

An input protection circuit ensures that 0V to 7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery backup. This circuit prevents device destruction due to mismatched supply and input voltages.

### Features


- High speed: f<sub>MAX</sub> = 200 MHz (typ) at V<sub>CC</sub> = 5.0V
- Low power dissipation:  $I_{CC} = 2 \mu A \text{ (max)}$  at  $T_A = 25^{\circ}C$
- High noise immunity: V<sub>NIH</sub> = V<sub>NIL</sub> = 28% V<sub>CC</sub> (min)
- Power down protection is provided on all inputs
- Pin and function compatible with 74HC112

## **Ordering Code:**

Order Number	Package Number	Package Description
74VHC112M	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150 Narrow
74VHC112SJ	M16D	16-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74VHC112MTC	MTC16	16-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
74VHC112N	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Surface mount packages are also available on Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

## **Connection Diagram**



## Pin Descriptions

Pin Names	Description					
J <sub>1</sub> , J <sub>2</sub> , K <sub>1</sub> , K <sub>2</sub>	Data Inputs					
CLK <sub>1</sub> , CLK <sub>2</sub>	Clock Pulse Inputs (Active Falling Edge)					
CLR <sub>1</sub> , CLR <sub>2</sub>	Direct Clear Inputs (Active LOW)					
$PR_1, PR_2$	Direct Preset Inputs (Active LOW)					
$Q_1, Q_2, \overline{Q}_1, \overline{Q}_2$	Outputs					

© 1999 Fairchild Semiconductor Corporation DS012123.prf

www.fairchildsemi.com

# 74VHC112


### Inputs Outputs PR CLR СР κ Q J Q L Н Х Х Х н L н L Х Х Х L н L L Х Х Х н н $Q_0$ $\overline{\mathsf{Q}}_0$ н Н ~\_ h h Н Н ~\_ Т h L Н н Н h I н L ~ $\overline{\mathsf{Q}}_0$ $Q_0$ н н T I $\sim$

**Truth Table** 

H (h) = HIGH Voltage Level L (l) = LOW Voltage Level X = Immaterial  $\sim$  = HIGH-to-LOW Clock Transition  $Q_0(\overline{Q}_0)$  = Before HIGH-to-LOW Transition of Clock

Lower case letters indicate the state of the referenced input or output one setup time prior to the HIGH-to-LOW clock transition.

# Logic Diagram

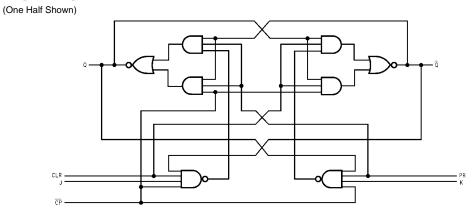

## Absolute Maximum Ratings(Note 1)

	-
Supply Voltage (V <sub>CC</sub> )	-0.5V to +7.0V
DC Input Voltage (V <sub>IN</sub> )	-0.5V to +7.0V
DC Output Voltage (V <sub>OUT</sub> )	$-0.5V$ to $V_{CC} + 0.5V$
Input Diode Current (I <sub>IK</sub> )	–20 mA
Output Diode Current (I <sub>OK</sub> )	±20 mA
DC Output Current (I <sub>OUT</sub> )	±25 mA
DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> )	±50 mA
Storage Temperature (T <sub>STG</sub> )	$-65^{\circ}C$ to $+150^{\circ}C$
Lead Temperature (T <sub>L</sub> )	
(Soldering, 10 seconds)	260°C

### Recommended Operating Conditions (Note 2)

Supply Voltage (V <sub>CC</sub> )	2.0V to +5.5V
Input Voltage (V <sub>IN</sub> )	0V to +5.5V
Output Voltage (V <sub>OUT</sub> )	0V to V <sub>CC</sub>
Operating Temperature (T <sub>OPR</sub> )	$-40^{\circ}C$ to $+85^{\circ}C$
Input Rise and Fall Time $(t_r, t_f)$	
$V_{CC}=3.3V\pm0.3V$	0 ~ 100 ns/V
$V_{CC} = 5.0V \pm 0.5V$	0 ~ 20 ns/V

Note 1: Absolute Maximum Ratings are values beyond which the device may be damaged or have its useful life impaired. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside databook specifications.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

## **DC Electrical Characteristics**

Symbol	Parameter	V <sub>cc</sub>	$T_A = 25^{\circ}C$			$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	
		(V)	Min	Тур	Max	Min	Max	Units	Conditions	
VIH	HIGH Level	2.0	1.50			1.50		v		
	Input Voltage	3.0 - 5.5	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		v		
V <sub>IL</sub>	LOW Level	2.0			0.50		0.50	v		
	Input Voltage	3.0 - 5.5			0.3 V <sub>CC</sub>		0.3 V <sub>CC</sub>	v		
V <sub>OH</sub>	HIGH Level	2.0	1.9	2.0		1.9			$V_{IN} = V_{IH}$	I <sub>OH</sub> = -50 μA
	Output Voltage	3.0	2.9	3.0		2.9		V	or V <sub>IL</sub>	
		4.5	4.4	4.5		4.4				
		3.0	2.58			2.48		v		$I_{OH} = -4 \text{ mA}$
		4.5	3.94			3.80		v		$I_{OH} = -8 \text{ mA}$
V <sub>OL</sub>	LOW Level	2.0		0.0	0.1		0.1		$V_{IN} = V_{IH}$	$I_{OL} = 50 \ \mu A$
	Output Voltage	3.0		0.0	0.1		0.1	V	or V <sub>IL</sub>	
		4.5		0.0	0.1		0.1			
		3.0			0.36		0.44	v		$I_{OL} = 4 \text{ mA}$
		4.5			0.36		0.44	v		$I_{OL} = 8 \text{ mA}$
I <sub>IN</sub>	Input Leakage Current	0 - 5.5			±0.1		±1.0	μA	$V_{IN} = 5.5V \text{ or GND}$	
I <sub>CC</sub>	Quiescent Supply Current	5.5			2.0		20.0	μA	$V_{IN} = V_{CC}$ or GND	

74VHC112

www.fairchildsemi.com

# 74VHC112

## **AC Electrical Characteristics**


Symbol	Parameter	V <sub>CC</sub> (V)	$T_A = 25^{\circ}C$			$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions
			Min	Тур	Max	Min	Max	onna	Conditions
f <sub>MAX</sub>	Maximum Clock	$3.3\pm 0.3$	110	150		100		MHz	$C_L = 15 \text{ pF}$
	Frequency		90	120		80		IVITIZ	$C_L = 50 \text{ pF}$
		$5.0\pm0.5$	150	200		135		MHz	$C_L = 15 \text{ pF}$
			120	185		110		IVITIZ	$C_L = 50 \text{ pF}$
t <sub>PLH</sub>	Propagation Delay	$3.3\pm 0.3$		8.5	11.0	1.0	13.4		$C_L = 15 \text{ pF}$
t <sub>PHL</sub>	Time (CP to $Q_n$ or $\overline{Q}_n$ )			10.0	15.0	1.0	16.5	ns	$C_L = 50 \text{ pF}$
		$5.0\pm0.5$		5.1	7.3	1.0	8.8	ns	$C_L = 15 \text{ pF}$
				6.3	10.5	1.0	12.0	115	$C_L = 50 \text{ pF}$
t <sub>PLH</sub>	Propagation Delay Time	$3.3\pm 0.3$		6.7	10.2	1.0	11.7		$C_L = 15 \text{ pF}$
t <sub>PHL</sub>	(PR or CLR to Q <sub>n</sub> or Q <sub>n</sub> )			9.7	13.5	1.0	15.0	ns	$C_L = 50 \text{ pF}$
		$5.0\pm0.5$		4.6	6.7	1.0	8.0	ns	$C_L = 15 \text{ pF}$
				6.4	9.5	1.0	11.0	115	$C_L = 50 \text{ pF}$
CIN	Input Capacitance			4	10		10	pF	V <sub>CC</sub> = Open
C <sub>PD</sub>	Power Dissipation			18				pF	(Note 3)
	Capacitance								

Note 3:  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained from the equation:  $I_{CC}$  (opr.) =  $C_{PD}^* V_{CC}^* f_{IN} + I_{CC}/4$  (per F/F), and the total  $C_{PD}$  when n pcs of the Flip-Flop operate can be calculated by the following equation:  $C_{PD}$  (total) = 30 + 14 • n

## **AC Operating Requirements**


Symbol		V <sub>cc</sub>	T <sub>A</sub> = 25°C		$\textbf{T}_{\textbf{A}}=-40^{\circ}\textbf{C} \text{ to }+85^{\circ}\textbf{C}$			
	Parameter	(Note 4) (V)	Тур	Guara	anteed Minimum	Units		
t <sub>W</sub>	Minimum Pulse Width	3.3		5.0	5.0	20		
	(CP or CLR or PR)	5.0		5.0	5.0	ns		
t <sub>S</sub>	Minimum Setup Time	3.3		5.0	5.0	ns		
	(J <sub>n</sub> or K <sub>n</sub> to CP <sub>n</sub> )	5.0		4.0	4.0			
t <sub>H</sub>	Minimum Hold Time	3.3		1.0	1.0	ns		
	(J <sub>n</sub> or K <sub>n</sub> to CP <sub>n</sub> )	5.0		1.0	1.0			
t <sub>REC</sub>	Minimum Recovery Time	3.3		6.0	6.0			
	(CLR or PR to CP)	5.0		5.0	5.0	ns		


Note 4:  $V_{CC}$  is  $3.3\pm0.3V$  or  $5.0\pm0.5V$ 

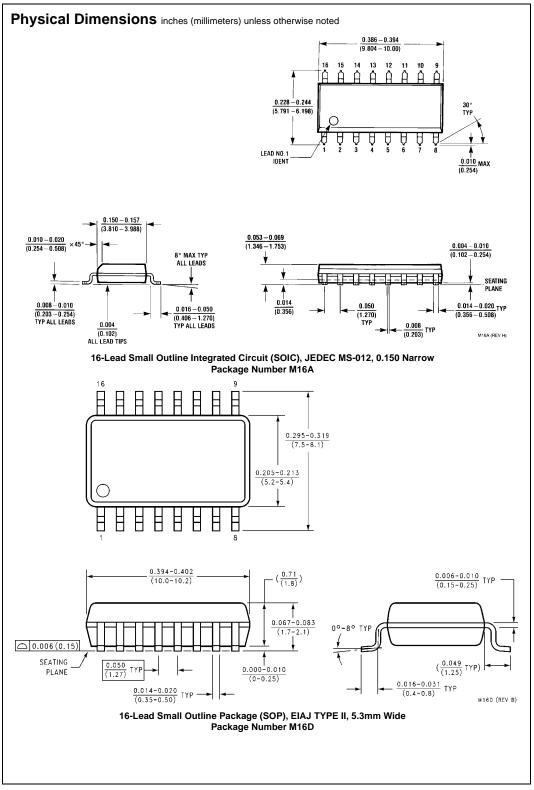

www.fairchildsemi.com

74VHC112

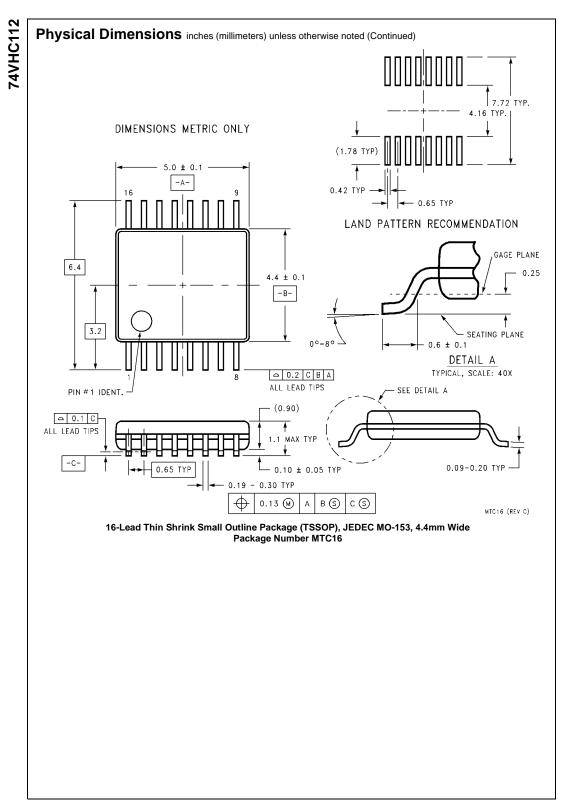

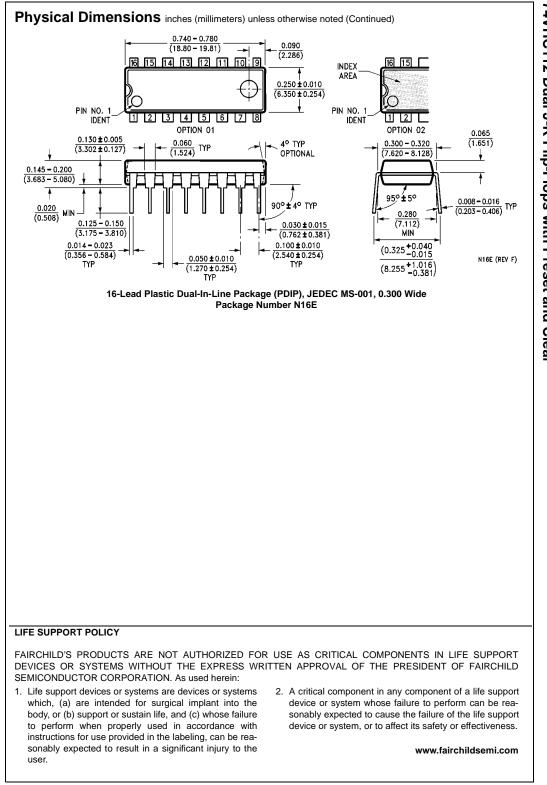

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

<sup>74</sup>VHC112 Dual J-K Flip-Flops with Preset and Clear