



REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2144	INITIAL RELEASE	07/16/2010	LH

- NOTES:
1. INSULATOR MATERIAL: NYLON 66.
 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
 3. PLATING: GOLD FLASH OVERALL.
 4. UL FLAMMABILITY RATING: 94V-2.
 5. DIELECTRIC WITHSTANDING VOLTAGE: 650V AC.
 6. CURRENT RATING: 1 AMP PER CONTACT.
 7. CONTACT RESISTANCE: 30 MILLI OHMS MAX.
 8. INSULATION RESISTANCE: 1000 MEGA OHMS.
 9. DOUBLE TUNING FORK TYPE CONTACT, ACCOMMODATES .016"[0.40mm] SQ PINS.
.050"[1.27mm] PITCH LOW PROFILE MINI TYPE.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES[MM]
TOLERANCES:
ANGULAR: $\pm 30^\circ$
.XX= $\pm .012$ [.30]
.XXX= $\pm .008$ [.20]
.XXXX= $\pm .004$ [.10]
INTERPRET DIMENSIONS AND GEOMETRIC
TOLERANCING
PER: ASME Y14.5M-2009

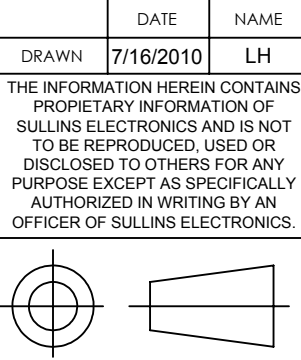

		SULLINS CONNECTOR SOLUTIONS	
DESCRIPTION			
MINI SHUNT, .050" CC, CLOSED TOP			
PART NUMBER			
NPB02SVFN-RC			
SIZE	DWG. NO.	REV	
C	11501	A	
SCALE: 16:1		SHEET 1 OF 1	