# High Performance BGA Cooling Solutions w/ Thermal Tape Attachment\*

## DIGI-KEY PART # ATS1232-ND


ATS PART # ATS-54210R-C2-R0

#### **Features & Benefits**

High aspect ratio, straight fin heat sinks that are ideal for compact PCB environments

Designed specifically for BGAs and other surface mount packages

Comes preassembled with high performance thermal interface material

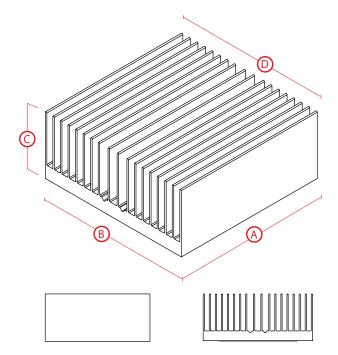

## **Thermal Performance Table**

| AIR VELOCITY |     | THERMAL RESISTANCE |               |  |
|--------------|-----|--------------------|---------------|--|
| FT/MIN       | M/S | °C/W (UNDUCTED)    | °C/W (DUCTED) |  |
| 200          | 1.0 | 7.8                | 5.1           |  |
| 300          | 1.5 | 6.3                |               |  |
| 400          | 2.0 | 5.5                |               |  |
| 500          | 2.5 | 5                  |               |  |
| 600          | 3.0 | 4.5                |               |  |
| 700          | 3.5 | 4.2                |               |  |
| 800          | 4.0 | 4                  |               |  |

### **Product Details**†

| DIMENSION A | DIMENSION B | DIMENSION C <sup>§</sup> | DIMENSION D | TIM <sup>‡</sup> | FINISH         |
|-------------|-------------|--------------------------|-------------|------------------|----------------|
| 21          | 21          | 19.5                     | N/A         | C675             | BLACK-ANODIZED |

For further technical information, please contact Advanced Thermal Solutions, Inc. at **1-781-769-2800** or **www.qats.com** 

- \* RoHS Compliant
- ‡ TIM = Thermal Interface Material
- † Dimensions are measured in millimeters
- ◆ Dimensions A & B refer to component size
- § Dimension C = the height of the heat sink shown above and does not include the height of the attachment method



