

LARGE EL LAMP DRIVER

FEATURES

- High Ratio of Brightness / Input Power
- Constant Brightness Versus Input Supply Changes
- Optimized for 15 nf to 45 nf Panel Capacitance
- Panel Voltage Slew Rates Controlled for Life Enhancement
- Panel Peak to Peak Voltage Independent of Input Voltage and Temperature
- Panel Peak to Peak Frequency Independent of Input Voltage and Temperature
- Miniature Package (SOT23L-6)
- Operates with Miniature Coil
- Minimum External Components
- Laser-Trimmed Fixed Frequency Operation
- PWM Control Method
- Adjustable Output Voltage
- Lower Noise (Audio and EMI)
- Intensity Control Application (Refer to Application Information)

DESCRIPTION

The TK6593x Electroluminescent (EL) Lamp Driver has been optimized for battery controlled systems where power consumption and size are primary concerns. The miniature device size (SOT23L-6), together with the miniature Toko EL coils (D32FU, D31FU, D52FU), further helps system designers reduce the space required to drive the small EL panels.

The proprietary architecture (detailed in the Theory of Operation section) of the TK6593x provides a constant output power to the lamp, independent of variations in the battery voltage. This architecture allows the output voltage to remain relatively constant as battery voltages decay, without the need for directly sensing the high voltage output of the EL driver.

ORDERING INFORMATION

TK6593 MTL

Lamp Frequency Code

| LAMP FREQUENCY CODE | | | | TAPE/REEL CODE | |
|---------------------|--------|----------|--------|----------------|--|
| TK65930 | 175 Hz | TK65935* | 300 Hz | TL: Tape Left | |
| TK65931* | 200 Hz | TK65936 | 325 Hz | | |
| TK65932 | 225 Hz | TK65937* | 350 Hz | | |
| TK65933* | 250 Hz | TK65938 | 375 Hz | | |
| TK65934 | 275 Hz | TK65939* | 400 Hz | | |

* Consult factory for availability of other frequencies.


APPLICATIONS

- Battery Powered Systems
- Cellular Telephones
- Pagers
- LCD Modules
- Wrist Watches
- Consumer Electronics

The oscillator circuits for the boost converter and lamp driver are both internally generated in the TK6593x, without the need for external components. The clock frequency of the boost converter is laser-trimmed to ensure good initial accuracy that is relatively insensitive to variations in temperature and supply voltage. The clock frequency of the lamp driver tracks the frequency of the boost converter by a constant scaling factor.

Furthermore, the drive architecture of the TK6593x has been designed to limit peak drive current delivered to the lamp. This approach limits the slew rate of the voltage across the lamp and has the potential to improve lamp life and decrease RF interference.

The TK6593x is available in a miniature, 6-pin SOT23L-6 surface mount package.

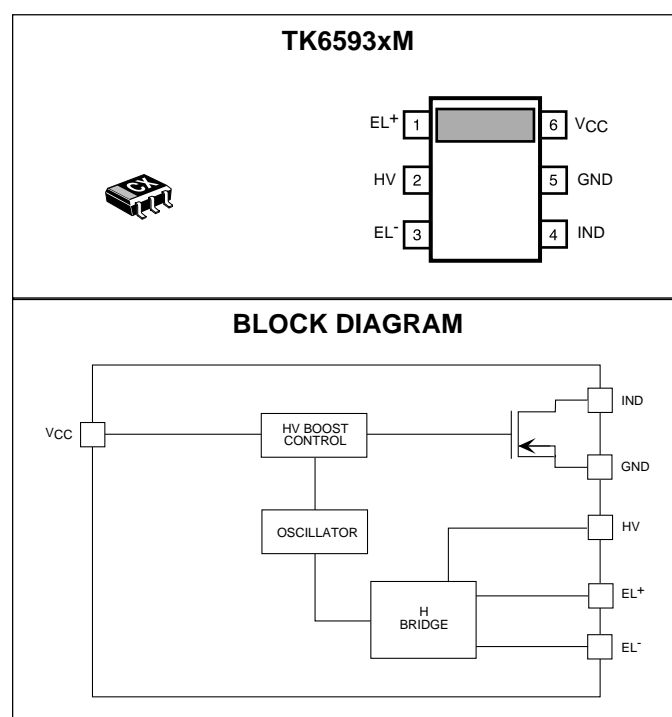

TK6593xM

ABSOLUTE MAXIMUM RATINGS

| | | | |
|--|-------------|-----------------------------------|----------------|
| V_{CC} Pin | 6.5 V | Storage Temperature Range | -55 to +150 °C |
| All Pins Except V_{CC} and GND | V_{CLAMP} | Operating Temperature Range | -30 to +80 °C |
| Power Dissipation (Note 1) | 600 mW | Junction Temperature | 150 °C |


TK6593x ELECTRICAL CHARACTERISTICS

$V_{CC} = 3.6\text{ V}$, $T_A = T_J = 25\text{ °C}$, unless otherwise specified.

| SYMBOL | PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------|---------------------------|-------------------------------------|-------------|-----|-----|---------------|
| V_{CC} | Input Supply Range | | 2.7 | 3.6 | 6 | V |
| I_Q | Quiescent Current | Current into pin 6 | | | 200 | μA |
| I_{PEAK} | Peak Current Threshold | (Note 4) | 87 | 97 | 107 | mA |
| F_{LAMP} | Lamp Frequency | | See Table 1 | | | Hz |
| F_{BOOST} | Boost Frequency | | See Table 2 | | | kHz |
| V_{CLAMP} | Boost Clamp Voltage | Force 100 μA into HV pin | 90 | 105 | 120 | V |
| $D_{(MAX)}$ | Maximum Duty Cycle | | 88 | 92 | 96 | % |
| V_{OUT} | Peak to Peak Lamp Voltage | (Note 3) | 125 | 140 | 155 | V |
| I_{CONV} | Converter Supply Current | (Notes 2, 3) | See Table 3 | | | mA |

Note 1: Power dissipation is 600 mW when mounted as recommended (200 mW In Free Air). Derate at 4.8 mW/°C for operation above 25 °C.
Note 2: Converter supply current is dependent upon the DC resistance of inductor L_1 . Lower DC resistances will result in lower supply currents.
Note 3: When using test circuit below.
Note 4: Refer to Page 5 graph of Peak Current Threshold vs. Supply Voltage.
Gen. Note: Refer to "INDUCTOR VALUE SELECTION" and "INDUCTOR TYPE SELECTION" of Design Considerations Section for choosing inductor.

TEST CIRCUIT

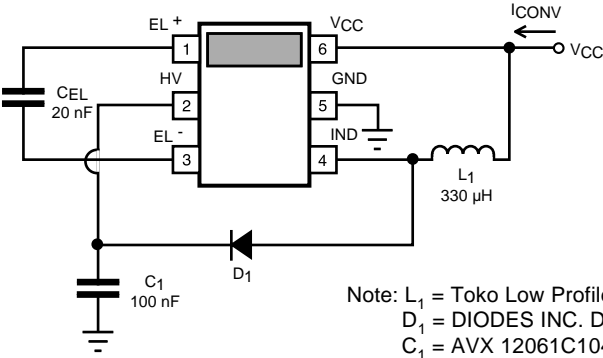

Note: L_1 = Toko Low Profile D52FU Series: 875FU-331 M
 D_1 = DIODES INC. DL4148
 C_1 = AVX 12061C104KAT2A

TK6593x ELECTRICAL CHARACTERISTICS

$V_{IN} = 3.6\text{ V}$, $T_A = T_j = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

TABLE 1: LAMP FREQUENCY

| TOKO PART NO. | MIN. | TYP. | MAX. |
|---------------|--------|--------|--------|
| TK65930 | 157 Hz | 175 Hz | 193 Hz |
| TK65931 | 180 Hz | 200 Hz | 220 Hz |
| TK65932 | 202 Hz | 225 Hz | 248 Hz |
| TK65933 | 225 Hz | 250 Hz | 275 Hz |
| TK65934 | 247 Hz | 275 Hz | 303 Hz |
| TK65935 | 270 Hz | 300 Hz | 330 Hz |
| TK65936 | 292 Hz | 325 Hz | 358 Hz |
| TK65937 | 315 Hz | 350 Hz | 385 Hz |
| TK65938 | 337 Hz | 375 Hz | 413 Hz |
| TK65939 | 360 Hz | 400 Hz | 440 Hz |


TABLE 2: OSCILLATOR FREQUENCY

| TOKO PART NO. | MIN. | TYP. | MAX. |
|---------------|----------|----------|----------|
| TK65930 | 20.1 kHz | 22.4 kHz | 24.7 kHz |
| TK65931 | 23.0 kHz | 25.6 kHz | 28.2 kHz |
| TK65932 | 25.9 kHz | 28.8 kHz | 31.7 kHz |
| TK65933 | 28.8 kHz | 32.0 kHz | 35.2 kHz |
| TK65934 | 31.6 kHz | 35.2 kHz | 38.8 kHz |
| TK65935 | 34.5 kHz | 38.4 kHz | 42.3 kHz |
| TK65936 | 37.4 kHz | 41.6 kHz | 45.8 kHz |
| TK65937 | 40.3 kHz | 44.8 kHz | 49.3 kHz |
| TK65938 | 43.2 kHz | 48.0 kHz | 52.8 kHz |
| TK65939 | 46.1 kHz | 51.2 kHz | 56.3 kHz |


TABLE 3: CONVERTER SUPPLY CURRENT

| TOKO PART NO. | MIN. | TYP. | MAX. |
|---------------|------|---------|---------|
| TK65930 | - | 14.2 mA | 28.4 mA |
| TK65931 | - | 16.2 mA | 32.4 mA |
| TK65932 | - | 18.3 mA | 36.6 mA |
| TK65933 | - | 20.3 mA | 40.6 mA |
| TK65934 | - | 22.3 mA | 44.6 mA |
| TK65935 | - | 24.3 mA | 48.6 mA |
| TK65936 | - | 26.4 mA | 52.8 mA |
| TK65937 | - | 28.4 mA | 56.8 mA |
| TK65938 | - | 30.4 mA | 60.8 mA |
| TK65939 | - | 32.4 mA | 64.8 mA |





TYPICAL PERFORMANCE CHARACTERISTICS
USING TEST CIRCUIT

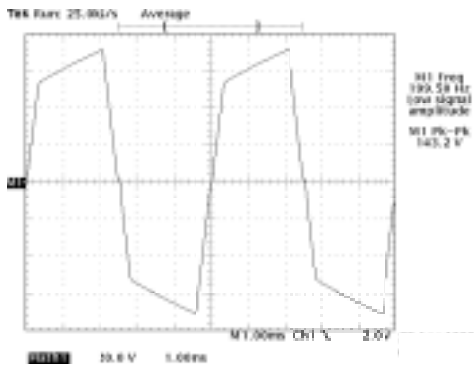







TK65931 Voltage Waveform

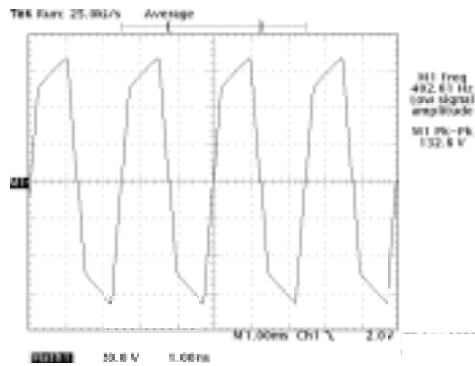







TK65939 Voltage Waveform

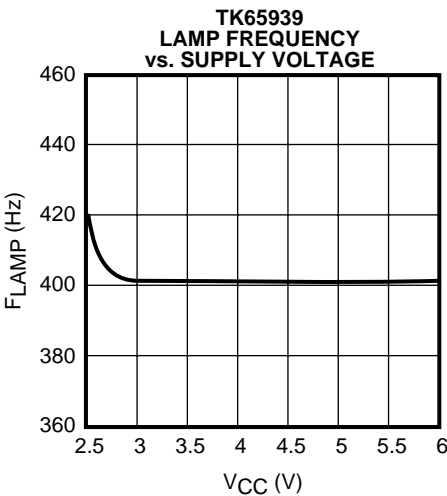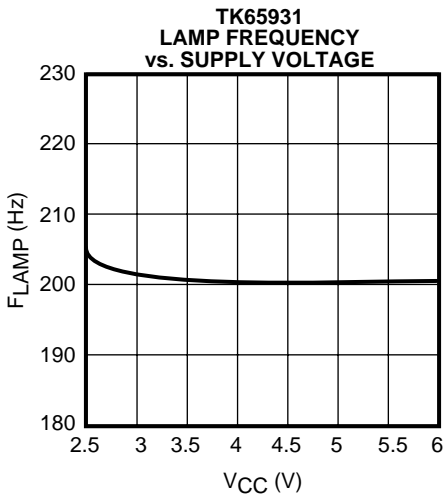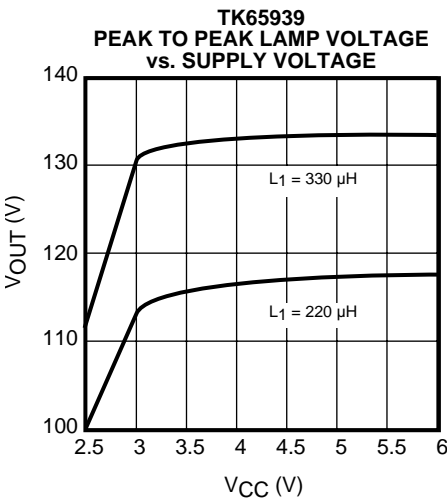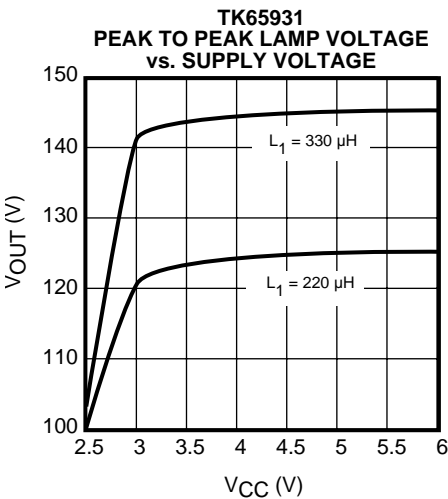





TYPICAL PERFORMANCE CHARACTERISTICS (CONT.) USING TEST CIRCUIT

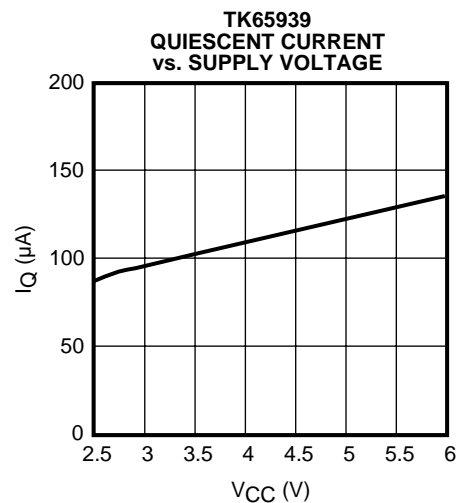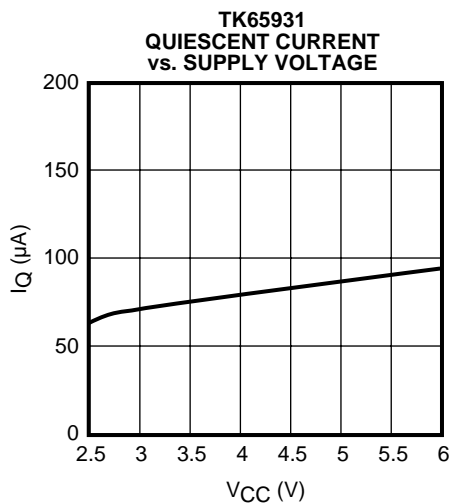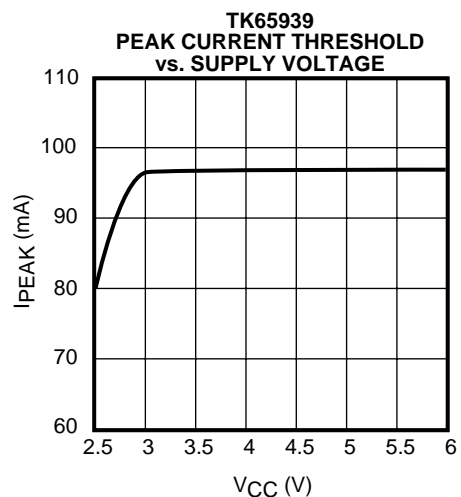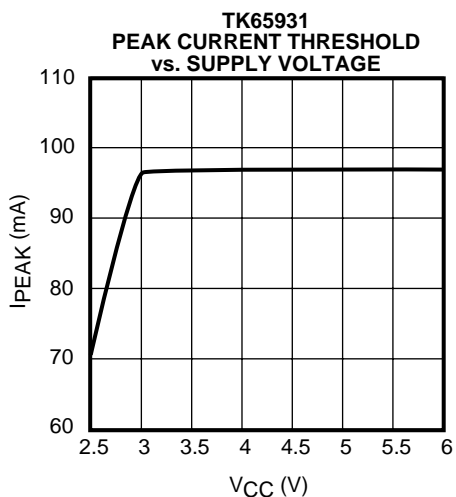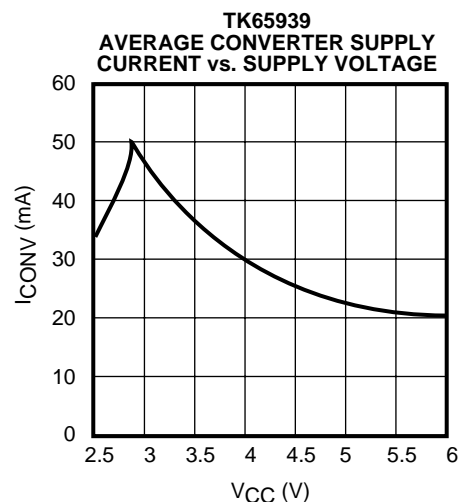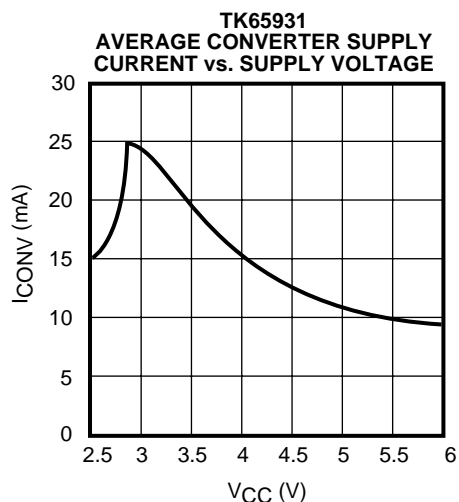





TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)
USING TEST CIRCUIT

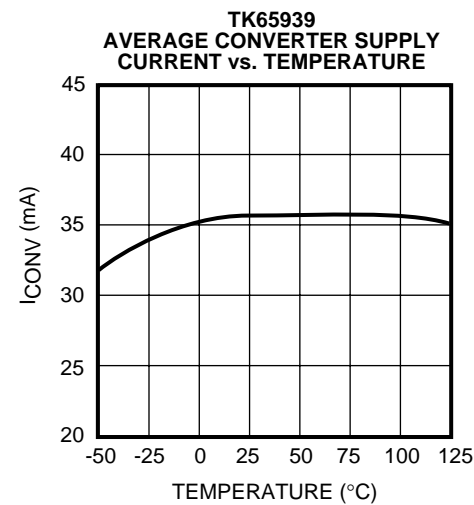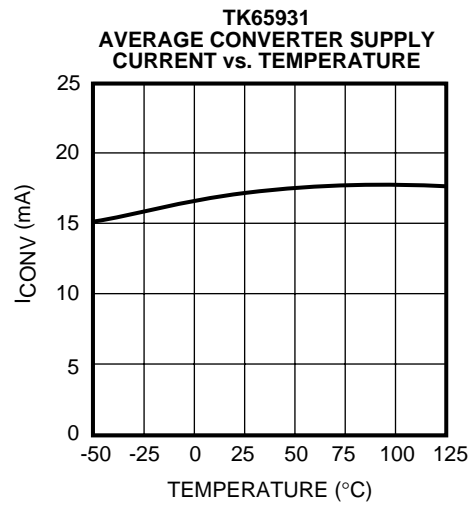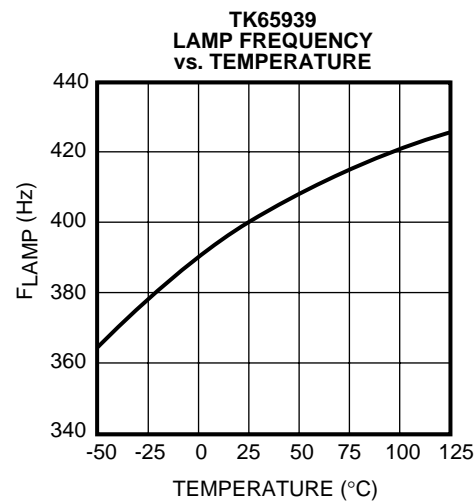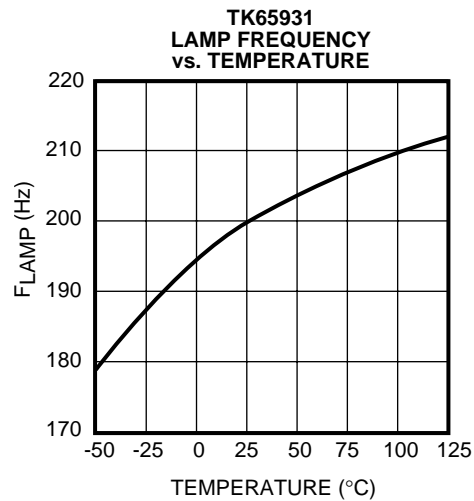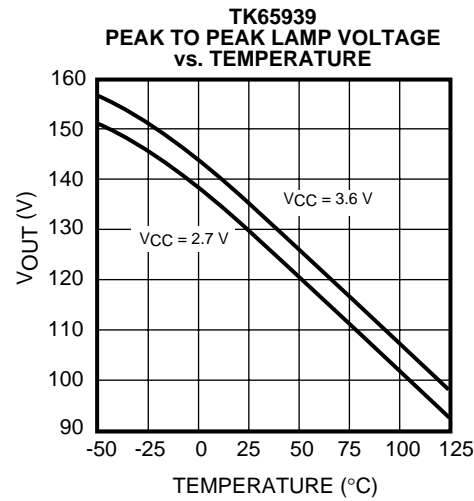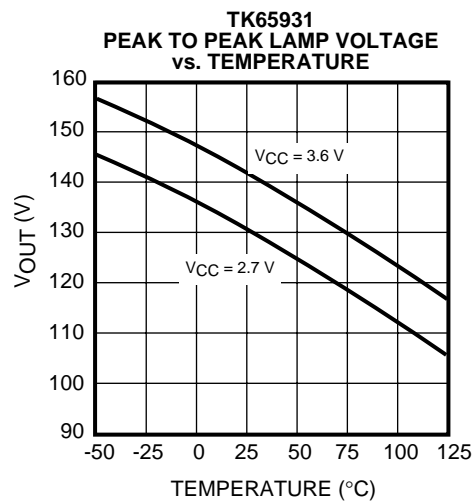


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.) USING TEST CIRCUIT

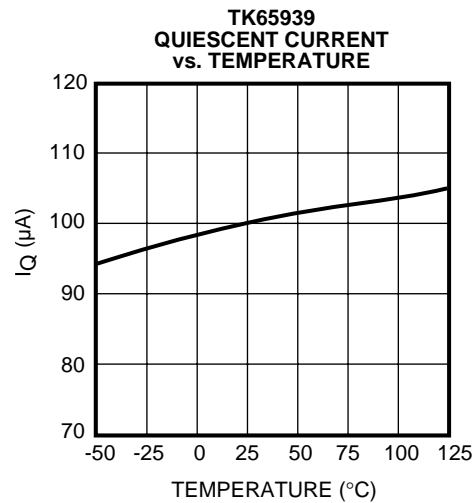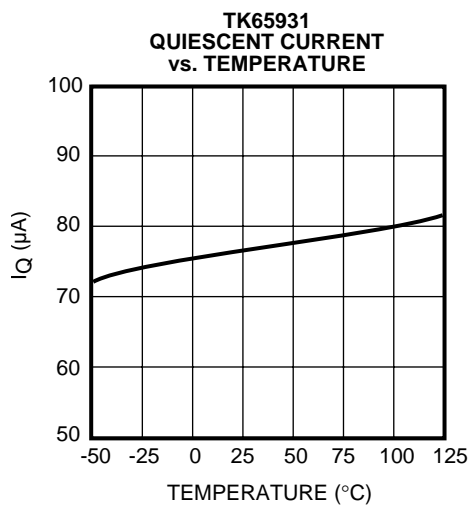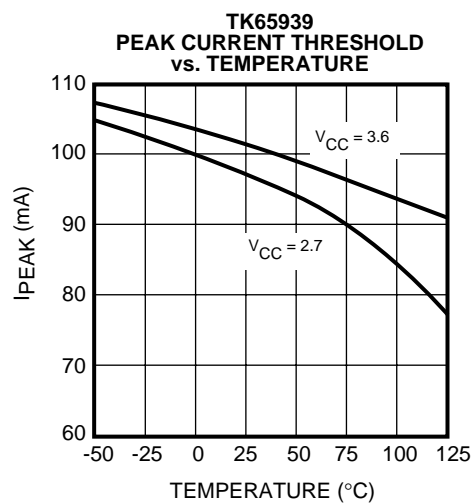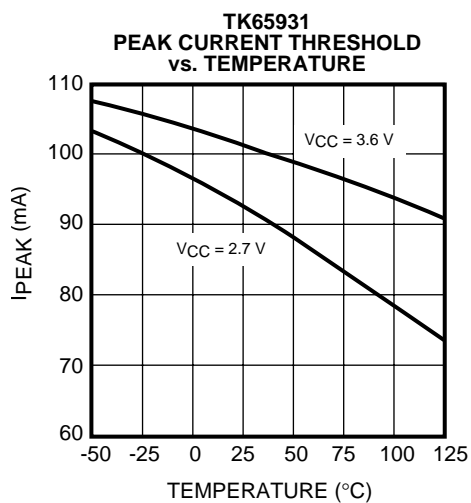

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)
USING D_(MAX) TEST CIRCUIT

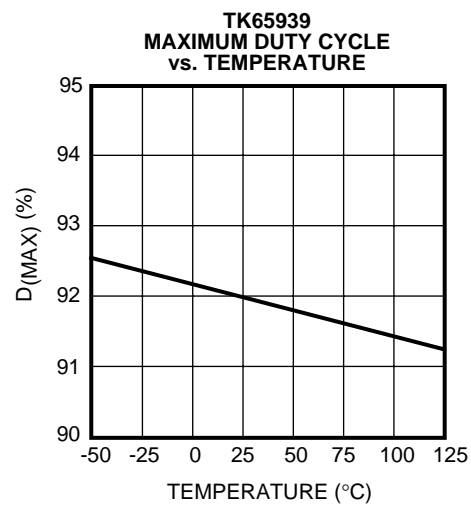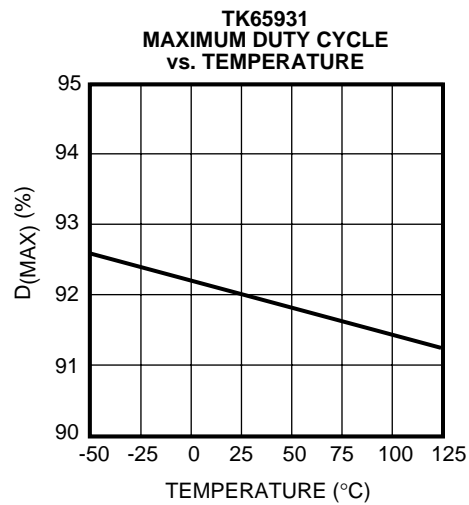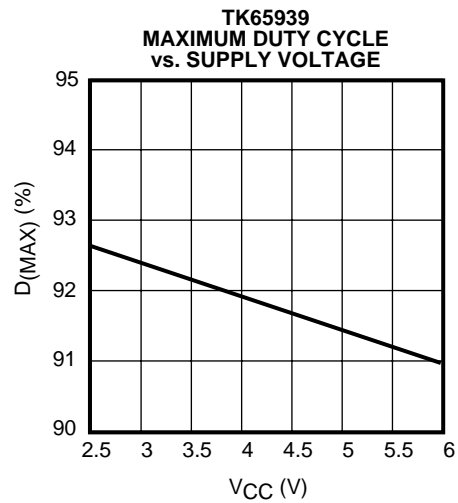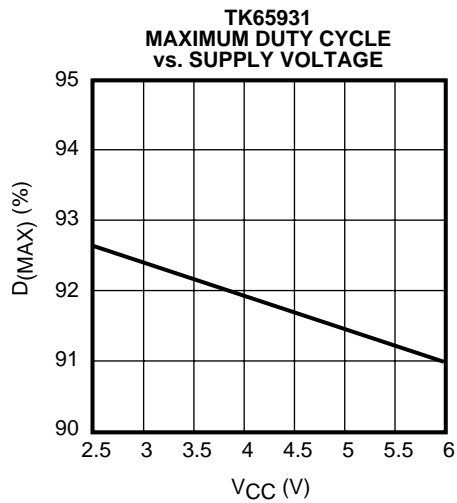

D_(MAX) TEST CIRCUIT

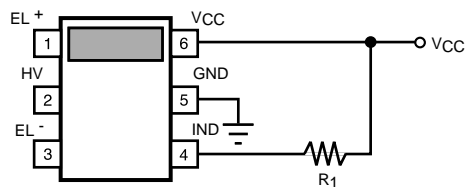

Note: R₁ = 470 Ω

THEORY OF OPERATION

An Electroluminescent (EL) Lamp is a strip of plastic, coated with a phosphorous material that emits light when a high voltage AC signal is applied to the terminals of the device. EL panels have the ability to light the entire panel uniformly. Because of this, they are gradually becoming more popular and widespread than LEDs. The amount of light emitted from an EL Lamp is typically proportional to the magnitude of the voltage applied to the lamp. Furthermore, the color of the light emitted by an EL Lamp is somewhat dependent upon the frequency of the applied drive signal. For most applications, a peak-to-peak voltage of 100 to 170 V, with a drive frequency of 175 to 400 Hz, provides optimal trade-off between lamp intensity and power consumption.

The capacitance of the EL Panel is typically proportional to the size of the lamp (a 1 square inch EL Panel typically exhibits approximately 5 nF of capacitance load). The TK6593x series of devices has been optimized to drive EL panels, which are approximately 3-6 square inches in size.

The Boost section of the TK6593x consists of a controller for stepping up a relatively low voltage (2.7 to 6 V) to a much higher voltage (50 to 90 V) needed to drive the EL Lamp. The boost section of the TK6593x uses a proprietary architecture which provides a relatively constant output power, independent of the input supply, without the need for sensing the high voltage output of the boost converter. By controlling the peak current through the switching element of the boost converter, the boost section provides a constant output power independent of the input supply.

The H-Bridge section of the TK6593x switches the high voltage output of the boost converter to the two terminals of the EL Lamp. By alternately switching the terminals of the lamp between the high voltage supply and ground, the peak-to-peak voltage developed across the lamp is effectively twice the high voltage generated by boost converter. Furthermore, the TK6593x limits the magnitude of the drive currents through the H-Bridge switches in order to minimize the edge rates developed across the EL Lamp. This approach protects the EL Panel from large current spikes and reduces the likelihood of high frequency noise components being injected into neighboring circuitry.

The Oscillator section of the TK6593x generates a fixed frequency clock source for the previously described Boost and H-Bridge sections, without the need for external components. The high frequency output of the oscillator is used for driving the boost controller. A lower frequency

clock is generated by dividing the high frequency clock by 128; this lower frequency clock corresponds to the drive frequency of the EL Lamp. The laser-trimmed oscillators are relatively insensitive to variations in temperature and supply voltage. Therefore, they provide good control of the lamp color emitted by the panel.

The circuit below illustrates a typical application where the TK6593x is driving a 3-square-inch EL Lamp with a capacitance of approximately 20 nF.

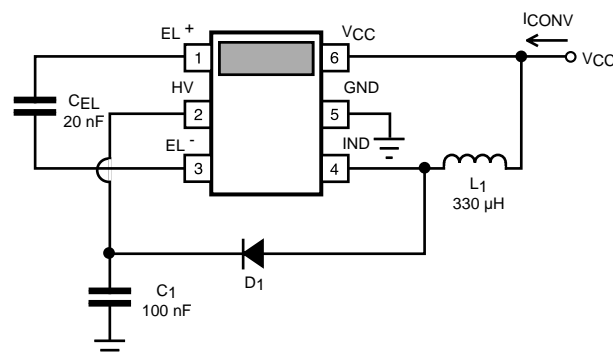


FIGURE 1: TYPICAL APPLICATION

By keeping the ratio of the boost frequency and the H-Bridge frequency constant, the peak-to-peak output voltage from the TK6593x becomes primarily dependent upon the capacitance of the EL Lamp, the peak current threshold of the boost converter, and the value of the inductive element used in the boost converter. For the TK6593x, the peak current threshold is laser-trimmed to 97 mA. The capacitive load of the EL Lamp is a function of panel size and is typically fixed. Therefore, the high voltage output of the boost converter can be set to a desired voltage by selecting the appropriate value of the inductive element used in the boost converter.

$$I_{PEAK} = \text{Boost Peak Current Threshold (97 mA)}$$

$$C_{EL} = \text{Capacitance of EL Lamp}$$

$$L = \text{Inductance Value}$$

$$V_{HV} = (I_{PEAK} / 2) \times \sqrt{(L / C_{EL}) \times 128}$$

THEORY OF OPERATION (CONT.)

With properly selected components, the TK6593x will nominally support peak output voltages to 90 V (180 V_{PK-PK}). Should the EL Panel become disconnected from the driver outputs, the removal of the load can cause the output voltage to increase beyond 90 V. To protect against this fault condition, a clamp circuit exists on the high voltage output which nominally limits the output voltage to a typical value of 105 V (210 V_{PK-PK}).

DETAILS CONCERNING THE H-BRIDGE SECTION OPERATION

In an effort to extend EL lamp life, reduce EMI emissions, and reduce the power draw of the IC, current sources to control the charging and discharging of the EL lamp panel and special sequencing control of the H-bridge FETs were added to the H-bridge of TK659xx.

Current sources were added between ground and the sources of the low-side N-channel FETs (Figure 2). Therefore, the current into and out of the EL panel is controlled and limited.

The FETs are turned off and on in the sequence shown in Figure 3. As is noted in Figure 3, there is a period of time when both of lower N-channel FETs are turned on and both of upper P-channel FETs are turned off. **This provides a period of time to discharge the EL panel capacitance completely;** before starting to recharge it again with current from HV voltage rail. Therefore, this special sequencing method prevents taking current off the HV voltage rail during the discharge of EL panel capacitance and operates more efficiently.

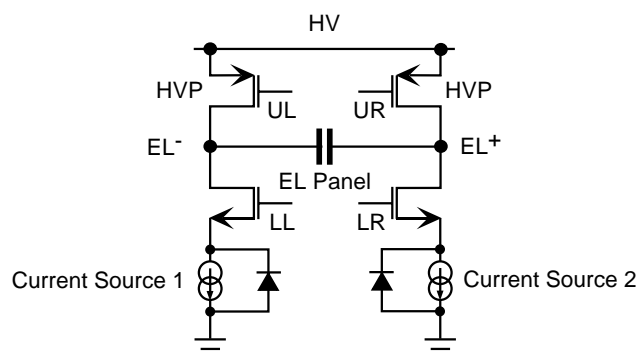


FIGURE 2: H-BRIDGE SCHEMATIC

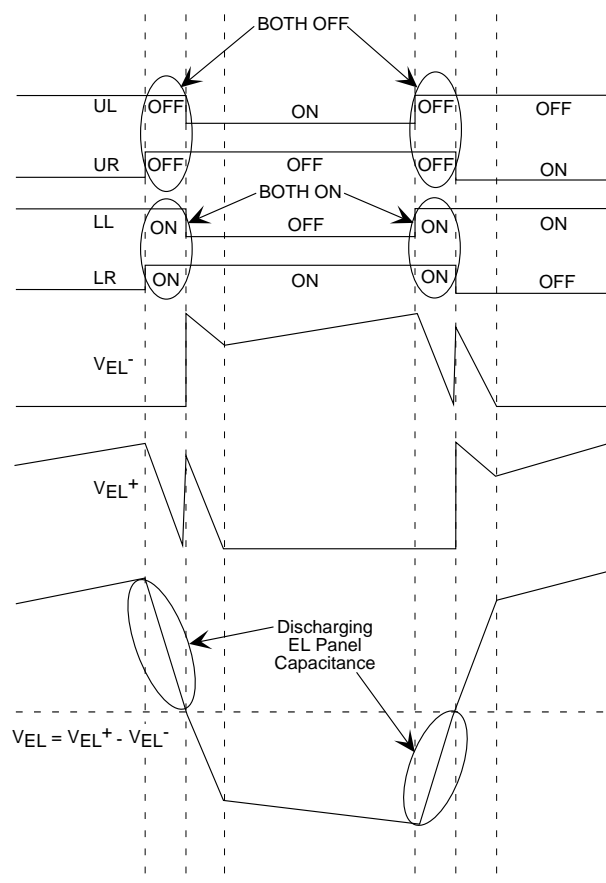


FIGURE 3: H-BRIDGE SEQUENCING WAVEFORMS

PIN DESCRIPTIONS

SUPPLY PIN (V_{CC})

This pin is the positive input supply for the TK6593x. Good design practices dictate capacitive decoupling to the ground pin.

GROUND PIN (GND)

The pin provides the ground connection for the IC.

IND PIN

This pin is periodically pulled to ground by a power transistor acting as an internal switch to the TK6593x. Externally, this pin is typically connected to an inductor and a rectifying diode. By modulating the switching action of the internal switch, the TK6593x can boost the relatively low voltage of the battery to the high voltage required to drive the EL Lamp.

HV PIN

This pin is connected to the filter capacitor and the cathode of the rectifying diode in order to generate a high voltage supply. This high voltage supply is switched to the terminals of the EL Lamp through the H-Bridge.

EL⁺ PIN

This pin is connected to one side of the EL Panel.

EL⁻ PIN

This pin is connected to the other side of the EL Panel.

Note: Measuring the voltage across the EL lamp (EL⁺ pin to EL⁻ pin) should be done with balanced scope probes using differential measurement techniques to obtain a true waveform of the voltage across the EL lamp.

DESIGN CONSIDERATIONS

INDUCTOR VALUE SELECTION

Designing an EL Driver utilizing the TK6593x is a very simple task. The primary component affecting the behavior of the converter is the inductor. Essentially, the entire design task primarily consists of selecting the proper inductor value and type given the operating conditions of the EL Panel (e.g., lamp capacitance, frequency, output voltage, supply range). The following tables and charts are intended to simplify the selection of the inductor.

Given the capacitance of the EL Lamp, and the peak output voltage requirements, the following table can be utilized to select the value of the inductive component.

TABLE 4: PEAK OUTPUT VOLTAGE VS. INDUCTOR VALUE AND LAMP CAPACITANCE

| INDUCTOR VALUE | 15.0 nF LAMP | 20.0 nF LAMP | 25.0 nF LAMP | 30.0 nF LAMP | 35.0 nF LAMP | 40.0 nF LAMP | 45.0 nF LAMP |
|-------------------|--|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 100 μ H | 45 V | 39 V | 35 V | 32 V | 29 V | 27 V | 26 V |
| 120 μ H | 49 V | 43 V | 38 V | 35 V | 32 V | 30 V | 28 V |
| 150 μ H | 55 V | 48 V | 43 V | 39 V | 36 V | 34 V | 32 V |
| 180 μ H | 60 V | 52 V | 47 V | 43 V | 39 V | 37 V | 35 V |
| 220 μ H | 66 V | 58 V | 51 V | 47 V | 44 V | 41 V | 38 V |
| 270 μ H | 74 V | 64 V | 57 V | 52 V | 48 V | 45 V | 43 V |
| 330 μ H | 81 V | 70 V | 63 V | 58 V | 53 V | 50 V | 47 V |
| 390 μ H | 88 V | 77 V | 69 V | 63 V | 58 V | 54 V | 51 V |
| 470 μ H | Close to 100 V operation check capacitor C ₁ voltage rating | 84 V | 75 V | 69 V | 64 V | 59 V | 56 V |
| 560 μ H | | 82 V | 75 V | 69 V | 65 V | 61 V | |
| 680 μ H | | | | | | | |
| 820 μ H | | 83 V | 76 V | 72 V | 67 V | | |
| 1000 μ H | | | | | | | |
| | Close to 100 V operation check capacitor C ₁ voltage rating | | | | | 87 V | 82 V |

Note: The voltages indicated in the table above may not be achievable under certain circumstances (i.e., low battery or higher drive frequencies). Refer to the charts on page 12 to determine which output voltage/coil combination can be supported by the EL driver.

As an example as to how the above table is to be used, assume that we have a 4-square-inch panel (30 nF capacitance) and we would like the peak-to-peak voltage across the lamp to be 140 V. The peak voltage on either terminal would be 70 V (140 V / 2). Referring to the table above, we can see that using a 470 μ H coil the peak voltage developed across a 30 nF Lamp would be approximately 69 V. In this particular example, the inductive component should have a value of 470 μ H.

INDUCTOR TYPE SELECTION






After the value of the inductor has been selected, an appropriate coil type needs to be selected taking into account such factors as DC resistance and current capability. The following charts can be utilized for selecting the proper family of Toko Coils. Furthermore, the following charts will also indicate if the TK6593x is the appropriate driver given the frequency and input supply requirements. The following charts will indicate whether or not the TK6593x has sufficient drive capability,

DESIGN CONSIDERATIONS (CONT.)

given the input supply and frequency requirements. A high-current solution for driving larger panels is currently under development. To utilize the following charts in selecting an appropriate coil, perform the following steps:

- 1) From the following charts, select the chart that matches the part number of the Toko EL Driver that will be used in the application. The part number of the Toko EL Driver will be dependant upon the desired frequency of the EL panel (e.g., TK65931 = 200Hz).
- 2) Determine input supply voltage range (e.g., 4 to 6 V). The x-axis of the following charts represent the minimum expected supply voltage. Below this minimum supply voltage the EL Driver output may begin to droop. On the appropriate chart, draw a vertical line upward from the minimum supply voltage represented on the x-axis (e.g., 4V).
- 3) Draw a horizontal line passing through the chosen inductor value on the y-axis (e.g., 470 μH).
- 4) The vertical and horizontal lines drawn in steps 2 and 3 respectively will intersect at a point. This point will lie in one of four regions of the chart (e.g., D52FU). These four regions suggest which family of Toko Coils to use.

Of the three coil families suggested in these charts, the D31FU has the smallest physical size but also has higher DC resistance. The D52FU series of coils has the largest physical size and the lowest DC resistance. The D52FU or the D32FU can be used as a reasonable substitute for the D31FU. Similarly, the D52FU can be used as a replacement for the D32FU. Substituting a coil with lower DC resistance will generally result in a system that will consume less power supply current.

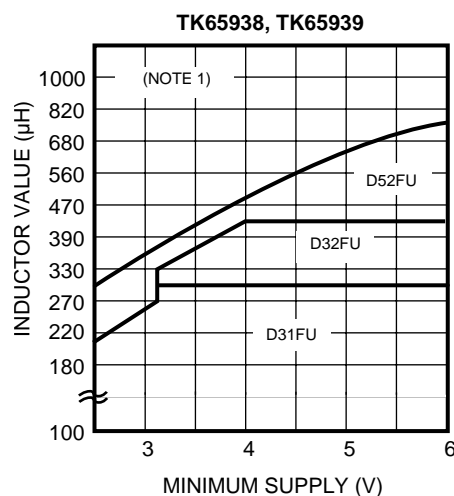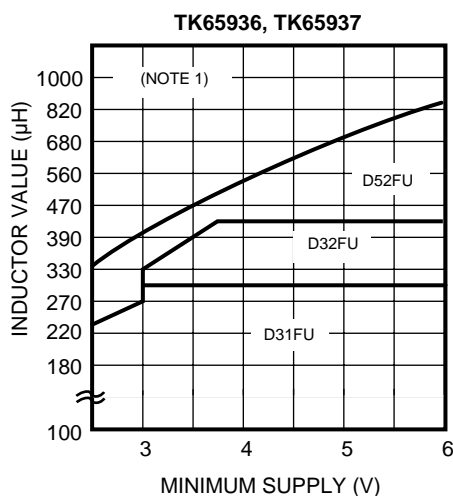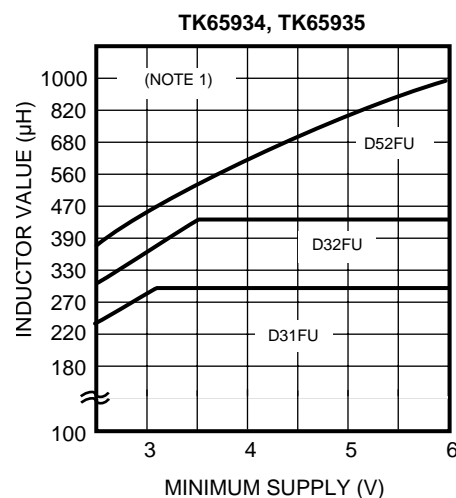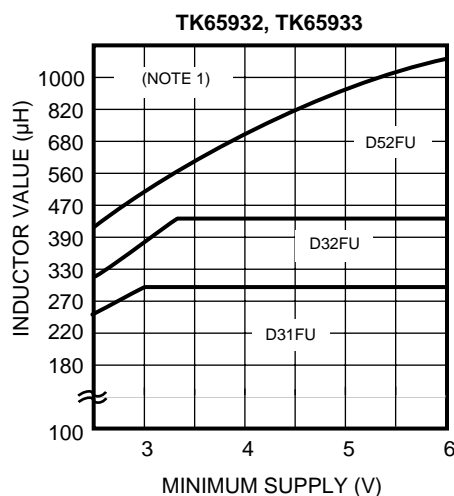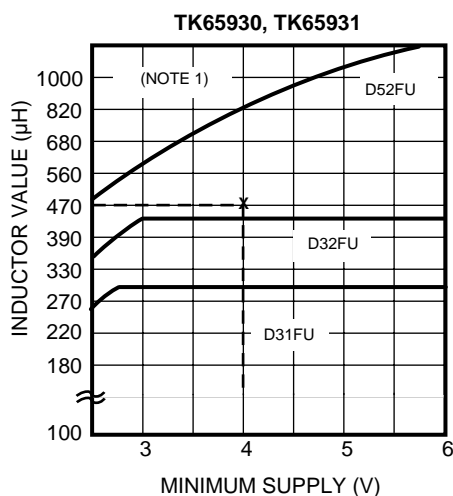

Note 1: A high-current solution for driving larger panels is currently under development.

APPLICATION INFORMATION

EL LAMP INTENSITY CONTROL APPLICATION

In driving EL lamp panels, it is sometimes desirable to be able to adjust the intensity of the EL lamp. The TK6593x can be used in such an application. By reducing the voltage supplied to the V_{CC} pin of the TK6593x, one can reduce the peak current regulation point of the IC. This translates into a reduction in the peak to peak output voltage across the EL panel, which reduces the intensity of the light being emitted from the EL lamp.

By decreasing the input voltage to the V_{CC} pin from 2.9 V to 2.1 V, the peak current regulation point will be reduced about 53 mA. This correlates to about a 2/3 reduction in the peak to peak voltage appearing across the EL lamp panel.

The V_{CC} pin only takes 200 μ A max. when the EL driver is in operation. Therefore, it can normally be controlled by logic power level signals. One way of accomplishing this with two digital logic signals is shown in Figure 4.

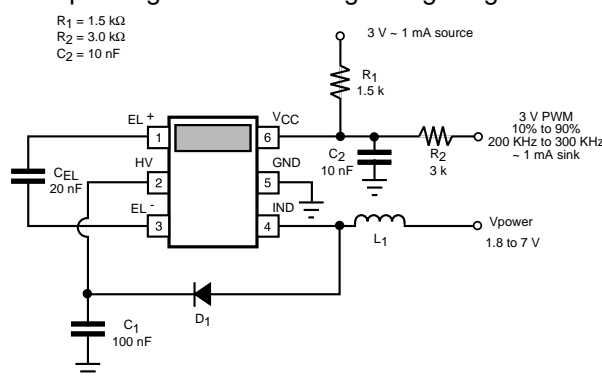


FIGURE 4: INTENSITY CONTROL APPLICATION

NOISE CONSIDERATIONS

There are two specific noise types relevant to the user when it comes to choosing EL Drivers: the Audio Noise and the Electromagnetic Interference (EMI) Noise.

The EMI Noise would most likely come from the boost converter section of the EL Driver circuit. The Toko EL Driver has specifically been designed to address this issue.

The device runs at a fixed frequency and the frequency is controlled tightly in order to avoid interference.

Furthermore, the panel frequency is forced to be a 128 submultiple of the boost frequency avoiding any type of beating frequencies.

By choosing shielded coils, the EMI noise problem can further be reduced.

The Audio Noise can come from several components which make up the system.


The coil, if operated in the audio range would be a source of noise. The Toko EL Driver was carefully designed to give the user the choice of 10 frequencies such that the coil frequency will always be above audio range. Since the device operates at a fixed frequency in discontinuous conduction mode, there are no possible submultiples which would cause audible noise.

The filter capacitor can be a source of audio noise. Furthermore, depending on how this cap is mounted, the mounting can act as an amplifier (as a speaker box). Certain ceramic caps driven from a high voltage source as in the EL Driver case, demonstrate a PIEZOELECTRIC effect which is distinguishable in the Audio Range.

Other types of caps, such as film type do not denote an audio noise.

The panel itself, being operated well into the Audio Range (175 Hz to 400 Hz) and of a capacitive nature driven from high voltage may also display Audible Noise. Mounting of this panel can enhance or diminish this natural effect of the panel.

LAYOUT

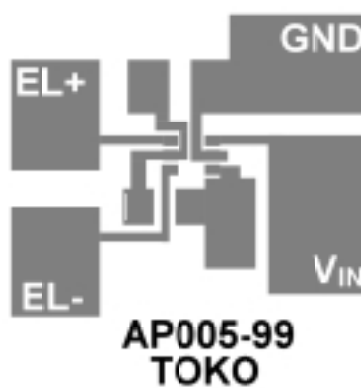


2x




Actual Size

SPLIT SUPPLY LAYOUT

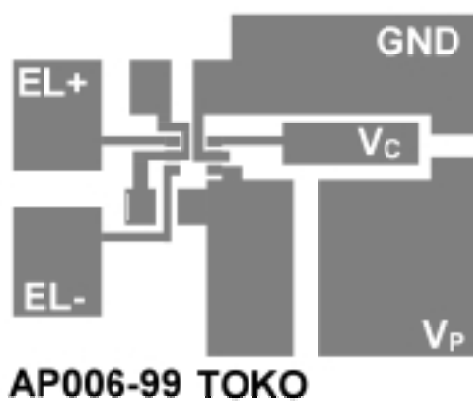

2x



Actual Size

| | |
|--|--|
| | |
|--|--|

SOT23L-6

Top view dimensions (mm):

- Pin 1 to Pin 3 pitch: 0.95
- Pin 4 to Pin 6 pitch: 0.95
- Pin 1 to Pin 4 pitch: 0.32 $^{+0.15}_{-0.05}$
- Pin 5 to Pin 6 pitch: 0.4 $^{+0.15}_{-0.05}$
- Pin 1 diameter: 0.1
- Pin 6 diameter: 0.1
- Marking area: 0.1

Side view dimensions (mm):

- Maximum height: 1.4 max
- Maximum width: 3.5 $^{+0.3}_{-0.1}$
- Width at base: (3.4)
- Width at top: 2.2
- Lead height: 0.3
- Lead angle: 15° max
- Lead thickness: 0.4
- Base thickness: 0.15 $^{+0.15}_{-0.05}$
- Base to lead height: 0.1

Recommended Mount Pad dimensions (mm):

- Pad width: 0.95
- Pad pitch: 0.95
- Pad length: 3.0
- Pad thickness: 0.6

Dimensions are shown in millimeters.
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

SOT23L-6

Top view of the SOT23L-6 package. The package is rectangular with a dashed line indicating the marking area. Pin numbers 1 through 6 are shown around the perimeter. Dimensions include a width of $3.5^{+0.3}_{-0.1}$ mm, a length of $0.4^{+0.15}_{-0.05}$ mm, and a pin pitch of 0.95 mm. A marking area of 0.1 mm is indicated. A note specifies a tolerance of ± 0.2 mm unless otherwise specified.

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Recommended Mount Pad diagram. The diagram shows the package footprint with dimensions: a width of 0.6 mm, a length of 1.0 mm, and a total length of 3.0 mm. The package is shown with a 15° maximum lead angle. The mounting pad dimensions are 0.95 mm by 0.95 mm.

Marking Information

Marking

| | |
|---------|----|
| TK65930 | C0 |
| TK65931 | C1 |
| TK65932 | C2 |
| TK65933 | C3 |
| TK65934 | C4 |
| TK65935 | C5 |
| TK65936 | C6 |
| TK65937 | C7 |
| TK65938 | C8 |
| TK65939 | C9 |

SOT23L-6


Top view of the SOT23L-6 package. The package is rectangular with a dashed line indicating the marking area. Pin numbers 1 through 6 are shown around the perimeter. Dimensions include a width of $3.5^{+0.3}_{-0.1}$ mm, a length of $0.4^{+0.15}_{-0.05}$ mm, and a pin pitch of 0.95 mm. A marking area of 0.1 mm is indicated. A note specifies a tolerance of ± 0.2 mm unless otherwise specified.

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Recommended Mount Pad diagram. The diagram shows the package footprint with dimensions: a width of 0.6 mm, a length of 1.0 mm, and a total length of 3.0 mm. The package is shown with a 15° maximum lead angle. The mounting pad dimensions are 0.95 mm by 0.95 mm.

Marking Information

| | Marking |
|---------|---------|
| TK65930 | C0 |
| TK65931 | C1 |
| TK65932 | C2 |
| TK65933 | C3 |
| TK65934 | C4 |
| TK65935 | C5 |
| TK65936 | C6 |
| TK65937 | C7 |
| TK65938 | C8 |
| TK65939 | C9 |



Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.