



PART NUMBER: ETSA190210UDC-P16P-SZ-C1

DESCRIPTION: SWITCHING POWER SUPPLY

MODEL

MODEL	output voltage	output current		output wattage	ripple*	efficiency level
	nominal (V dc)	min (A)	max (A)	max (W)	max. (mVp-p)	
ETSA190210UDC-P16P-SZ-C1	19	0	2.1	40	240	V

*at full load, 100 ~ 240 V ac input, 20 MHz bandwidth oscilloscope ,each output terminated with a 10 μ F aluminum electrolytic and 0.1 μ F ceramic capacitors.

INPUT

parameter	conditions/description	min	nom	max	units
rated input voltage		100		240	V ac
input voltage range		90		264	V ac
rated frequency		50		60	Hz
frequency range		47		63	Hz
input current				1.0	A
no load power consumption				0.3	W

OUTPUT

parameter	conditions/description	min	nom	max	units
line regulation			± 1		%
load regulation			± 5		%
short circuit protection	output shut down and auto restart				

SAFETY & COMPLIANCE

parameter	conditions/description	min	nom	max	units
HI-POT	input to output at 10 mA for 1 minute			3,000 4,242	V ac V dc
insulation resistance	input to output at 500 V dc	100			M Ω
safety approvals	UL/cUL, GS				
EMC/EMI	FCC class B, CE, meets VCC I class II				
leakage current				0.25	mA
RoHS compliant	yes				

ENVIRONMENTAL

parameter	conditions/description	min	nom	max	units
operating temperature		0		40	$^{\circ}$ C
operating humidity		20		80	%
storage temperature		-10		70	$^{\circ}$ C
storage humidity		10		90	%




rev. A
date 12/28/2010
page 2 of 5

PART NUMBER: ETSA190210UDC-P16P-SZ-C1

DESCRIPTION: SWITCHING POWER SUPPLY

LABEL

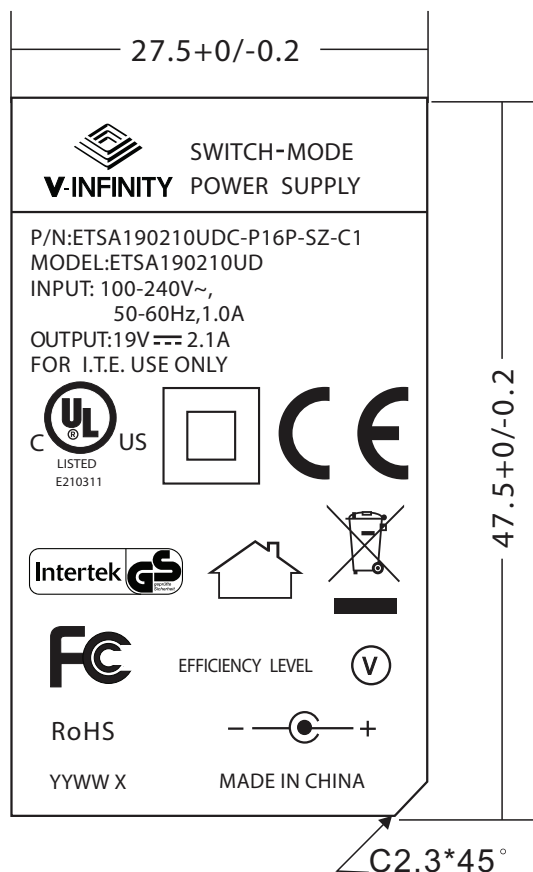

material: metalized polyester
color: silver on black base

remarks: YYWW X
YY=production year
WW=production week
X=production location








PART NUMBER: ETSA190210UDC-P16P-SZ-C1

DESCRIPTION: SWITCHING POWER SUPPLY

MECHANICAL DRAWING

input plug	inlet IEC320 / C8-2 type
weight	155 g
case size	75.5 L x 47.8 W x 28.2 H mm tolerance: ± 1 mm

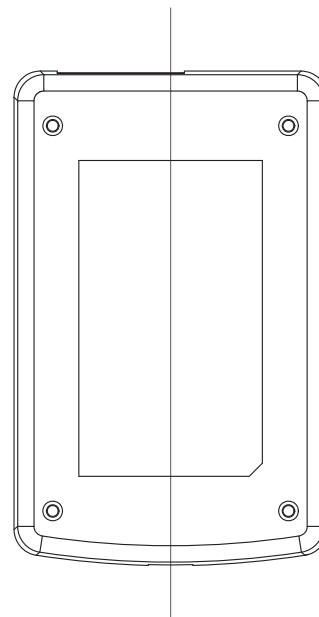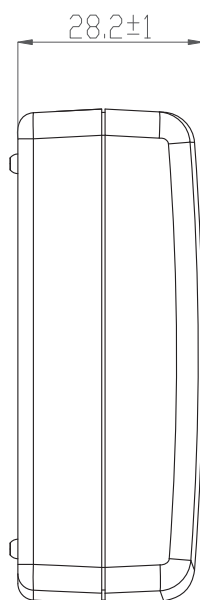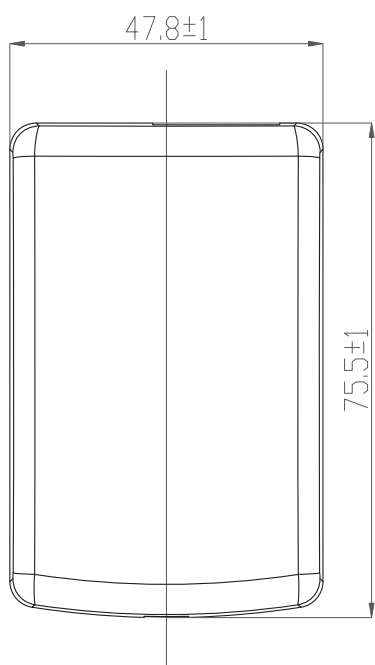




PART NUMBER: ETSA190210UDC-P16P-SZ-C1

DESCRIPTION: SWITCHING POWER SUPPLY


DC CORD

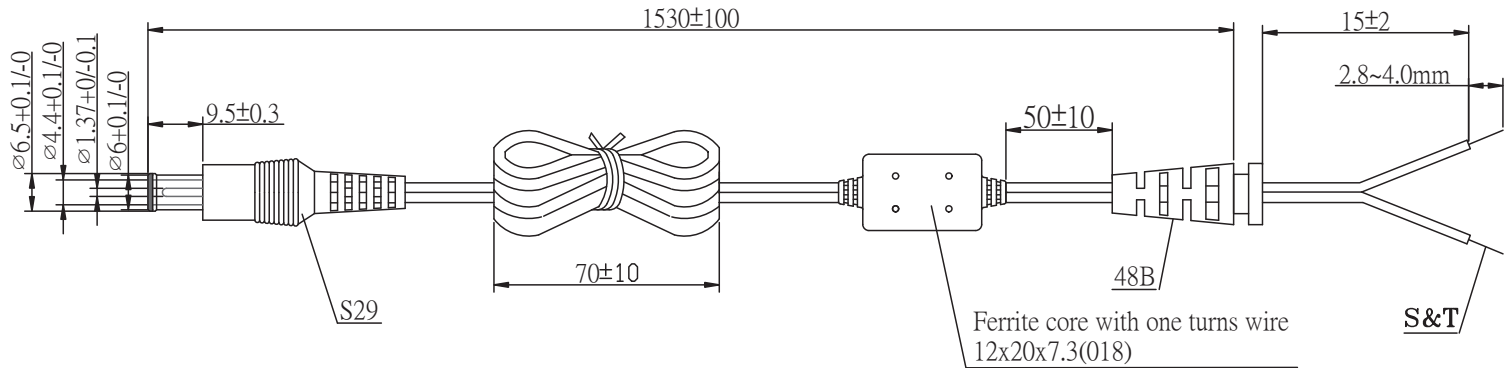

#20AWGX2C UL2468 HAVE ON WORD WIRE IN OUTER, NO WORD WIRE IN INNER

OD: $\varnothing 1.9 \times 3.8$

AC CORD

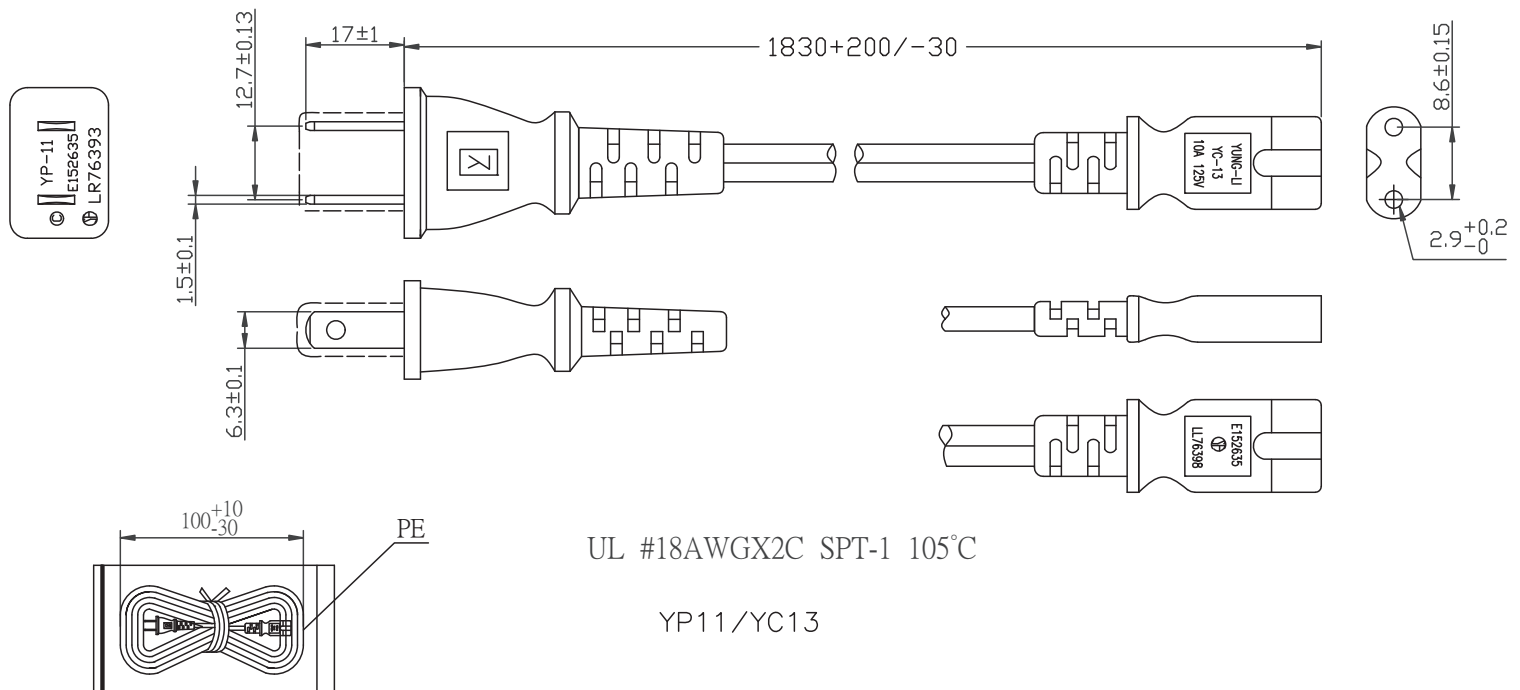


PART NUMBER: ETSA190210UDC-P16P-SZ-C1

DESCRIPTION: SWITCHING POWER SUPPLY

INDIVIDUAL PACKAGING

tolerance	± 1 mm
-----------	------------

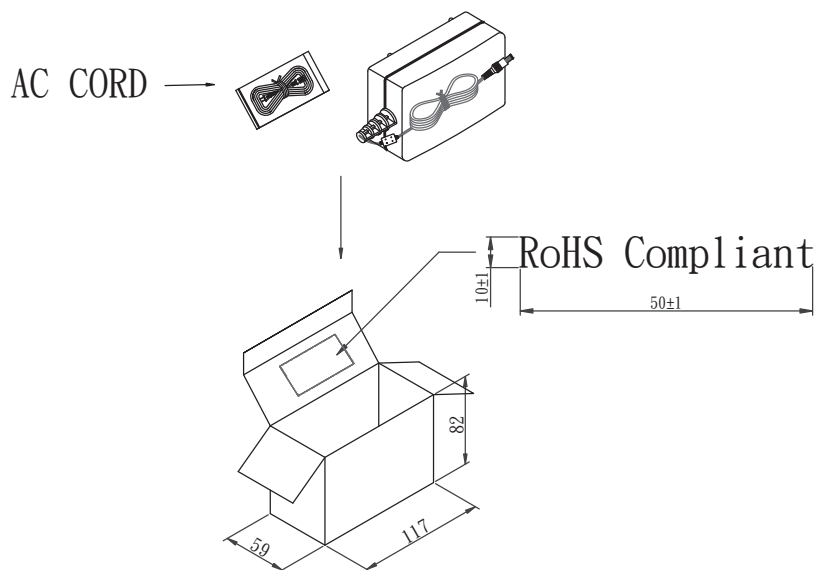

PACKAGING

tolerance	+7 / -0 mm
-----------	------------

EXTERNAL CARTON MATERIAL: A=B(6mm)

INTERNAL CARTON MATERIAL: B3B(3mm)

Q'TY: 60PCS(15*4)

N.W: 9.3KGS

G.W: 11.12KGS

G.W: 11.62KGS

