




THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

|                                          |                          |  |                                                                                 |                                                                                    |                                                                                                                             |
|------------------------------------------|--------------------------|--|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Rating                                   | 3A. 125VAC, 1.5A. 250VAC |  |  | Mounting Hole                                                                      | Circuit Diagram                                                                                                             |
| Contact Resistance                       | 50m ohm max.             |  |                                                                                 |  | <br>SPST OFF - (ON)<br><br>( )= Momentary |
| Insulation Resistance                    | DC 500V 100M ohm min.    |  |                                                                                 |                                                                                    |                                                                                                                             |
| Dielectric Strength                      | AC 1000V 1 minute        |  |                                                                                 |                                                                                    |                                                                                                                             |
| BASE COLOR: Black<br>BUTTON COLOR: Black |                          |  |                                                                                 |                                                                                    |                                                                                                                             |

BASE COLOR: Black  
BUTTON COLOR: Black

Cut-Out 4mm thk. max.

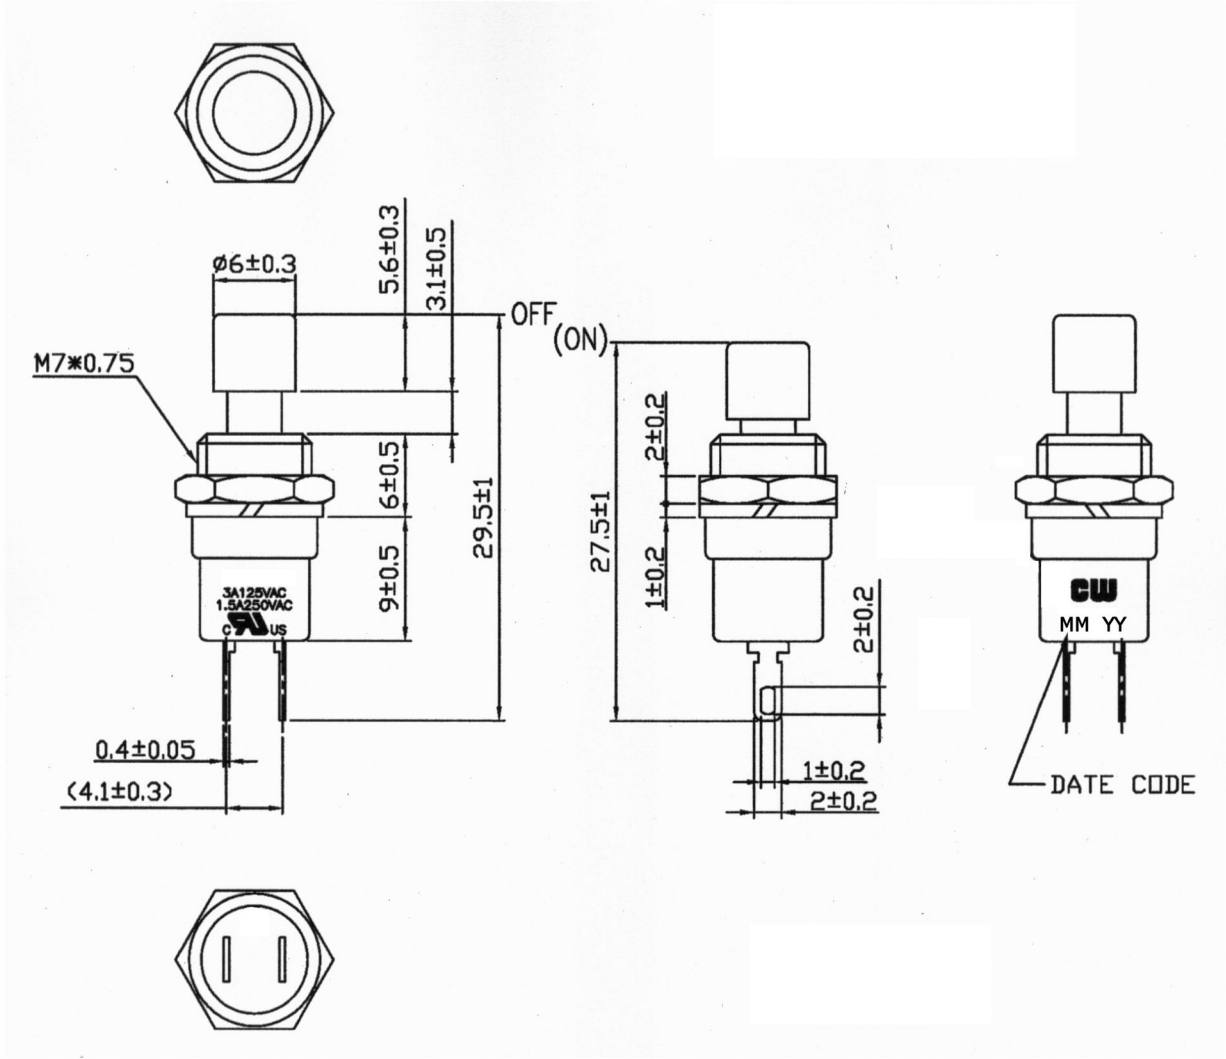

RoHS Compliant

|                                                                                                                                                                     |                                  |        |                            |                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------|----------------------------|---------------------|
|  <b>CW INDUSTRIES</b><br>Southampton, Pa. 18966<br>Tel 215.355.7080/www.cwind.com | Date Drawn: 12/25/09             | Rev. 0 | Unit: mm                   | Checked By: G. Guld |
|                                                                                                                                                                     | Title: <b>PUSH BUTTON SWITCH</b> |        | CW P/N: <b>GPB024A05BB</b> |                     |