


WATERPROOF SINGLE-POLE ROCKER SWITCH

KC Series

Features

- Enclosed switch complying to IP56
- Lighted and non-lighted versions
- Multiple terminal options
- Mechanical life: 100,000 cycles
- DC electrical life: 6,000 cycles

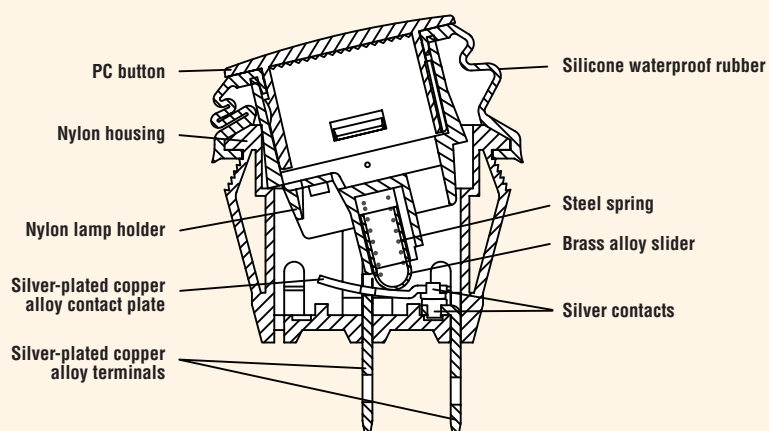

Electrical Ratings

Switch Series	VDC	EN61058 Rating	UL1054 Rating	Electrical Life at Rated Load	
				According to VDE (Min. Operations)	According to UL (Min. Operations)
KC	20A 14VDC; 10A 28VDC	10(4)A 250V	16A 125VAC; 10A 250VAC	10,000	6,000

Specifications

Electrical

Dielectric Strength:	1500VAC for 1 minute
Insulation Resistance:	10 ⁸ ohms min at 500VDC
Initial Contact Resistance:	0.050 ohms max
Temperature Rating:	-25°C to +85°C

Materials

Actuator:	Polycarbonate 94V-2
Housing:	Nylon 66 94V-2
Spring:	Stainless Wire
Contacts:	Silver Alloy
Movable Arm:	Silver-plated Copper Alloy
Terminals:	Silver-plated Copper Alloy
Waterproof Rubber:	Silicone



