


WATERPROOF ROCKER SWITCH

KM Series

Features

- Enclosed switch complying to IP56
- Available in single- or double-pole
- Lighted and non-lighted versions
- Maintained-action and momentary options
- Snap-in mounting
- Mechanical life: 100,000 cycles
- DC electrical life: 25,000 cycles

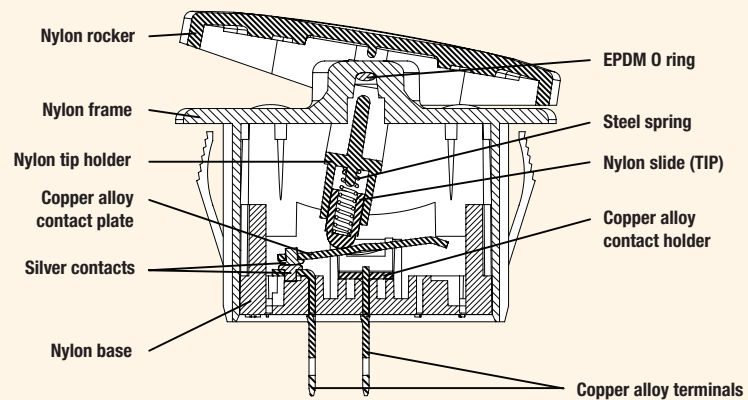

Electrical Ratings

Switch Series	Rating	Electrical Life at Rated Load (Min. Operations)
KM	20A 125VAC; 10A 250VAC; 21A 14VDC	6,000

Specifications

Electrical

Dielectric Strength:	1500VAC for 1 minute
Insulation Resistance:	10 ⁸ ohms min at 500VDC
Initial Contact Resistance:	0.050 ohms max
Temperature Rating:	-20°C to +85°C

Materials

Actuator:	Soft Material Molded Polycarbonate Lens
Housing:	Nylon 66 94V-2 min.
Bezel:	Nylon 66 with 33% Glass Fiber
Spring:	Steel Wire
Contacts:	Silver-plated Copper Alloy
Movable Arm:	Silver-plated Copper Alloy
Terminals:	Silver-plated Copper Alloy (except lamp terminal)



