



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	8A 125V AC, 4A 250V AC			Mounting Hole 	Circuit Diagram  SPST (ON) - OFF () = Momentary											
	10A 125V AC, 6A 250V AC															
	10A 28V DC, 6A 14 VT															
	6A 250V ~ 															
Contact Resistance		50m ohm max.		<table><tr><td>Thickness</td><td>X</td><td>Y</td></tr><tr><td>0.75 - 1.25</td><td>19.2 - 0.1</td><td>7.0 + 0.1</td></tr><tr><td>1.25 - 2.00</td><td>19.4 - 0.1</td><td>7.0 + 0.1</td></tr><tr><td>2.00 - 3.00</td><td>19.8 - 0.1</td><td>7.0 + 0.1</td></tr></table>	Thickness	X	Y	0.75 - 1.25	19.2 - 0.1	7.0 + 0.1	1.25 - 2.00	19.4 - 0.1	7.0 + 0.1	2.00 - 3.00	19.8 - 0.1	7.0 + 0.1
Thickness	X	Y														
0.75 - 1.25	19.2 - 0.1	7.0 + 0.1														
1.25 - 2.00	19.4 - 0.1	7.0 + 0.1														
2.00 - 3.00	19.8 - 0.1	7.0 + 0.1														
Insulation Resistance		DC 500V 100M ohm min.														
Dielectric Strength		AC 1500V 1 minute														
Operating Temperature		-25 ^o C ~ 85 ^o C														

BASE COLOR: Black

BUTTON COLOR: Black

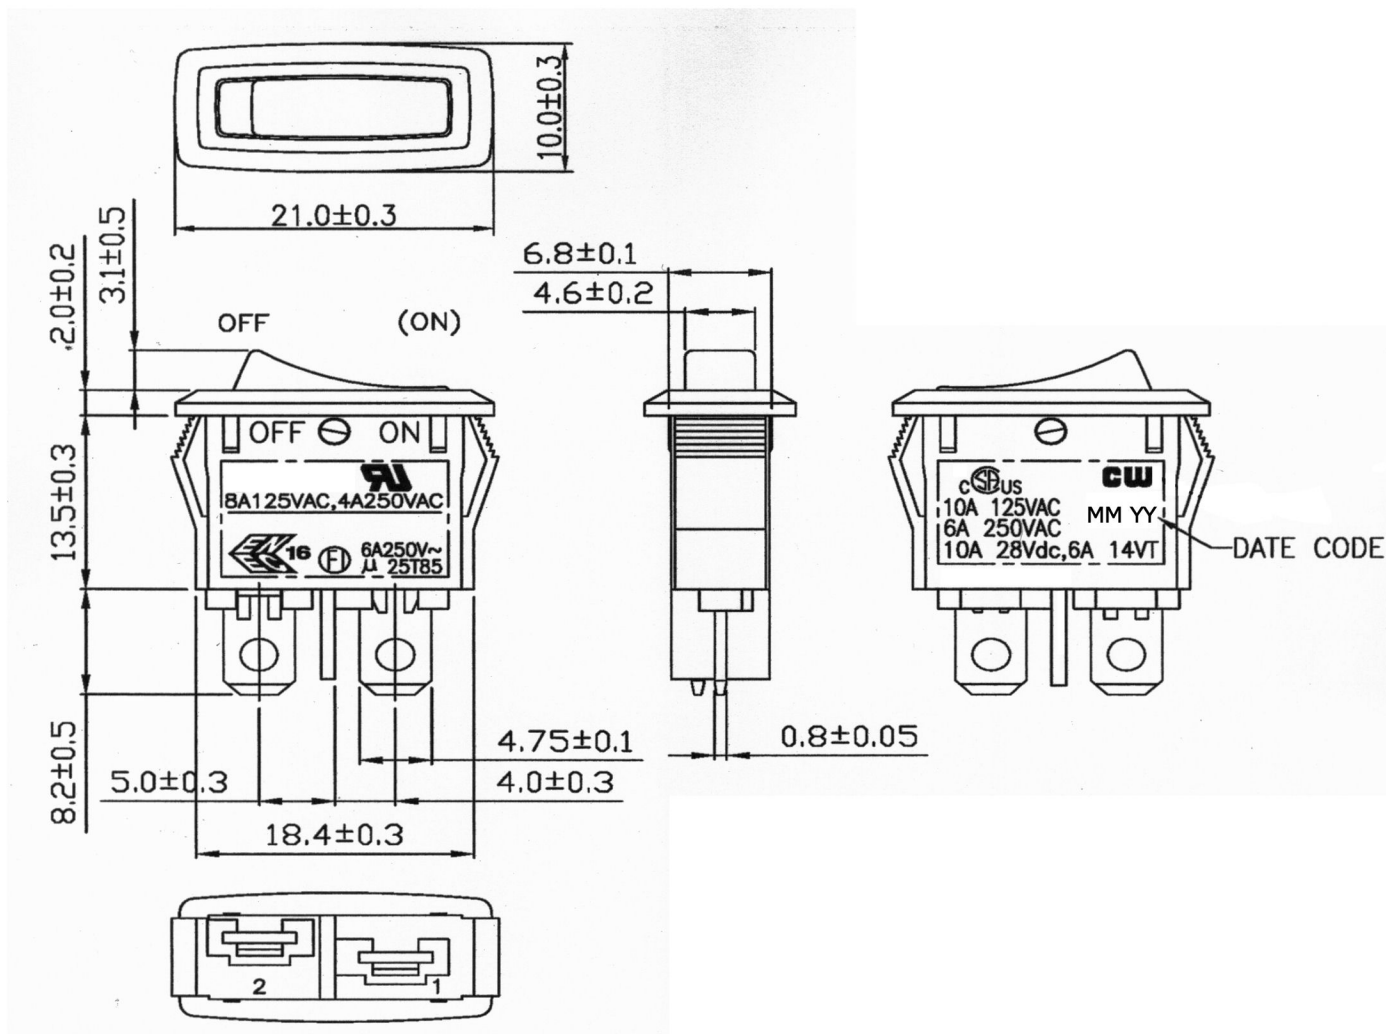

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 12/21/09

Rev. 0

Unit: mm

Checked By: G. Guld

Title:
ROCKER SWITCH

CW P/N:
GRB243F02BB