

Rating	16A 125VAC 1/3HP
	10A 250VAC 1/2HP
	16(6)A 250VAC
	25A 14VDC , 15A 28VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temp.	- 25 ° C ~ 85 ° C
Switch Function	3P SPDT ON - OFF - ON

Mounting Hole			Circuit Diagram	
Thickness	X	Y		
0.75....2.5	27.6-0.1	13.8+0.1		
2.5....3.5	27.8-0.1	13.8+0.1		
3.5....4.5	28.0-0.1	13.8+0.1		

***MATERIAL:**




Frame: Black, Nylon 66 (94-V2)

Actuator: Black, PC (94-V2)

Waterproof rubber: Black, Silicone

Printed: None

*Waterproof: IP65

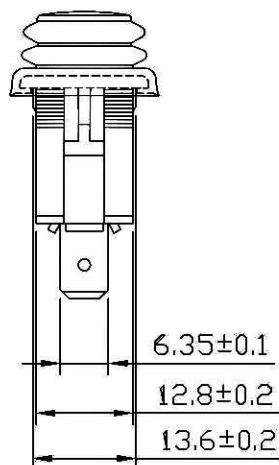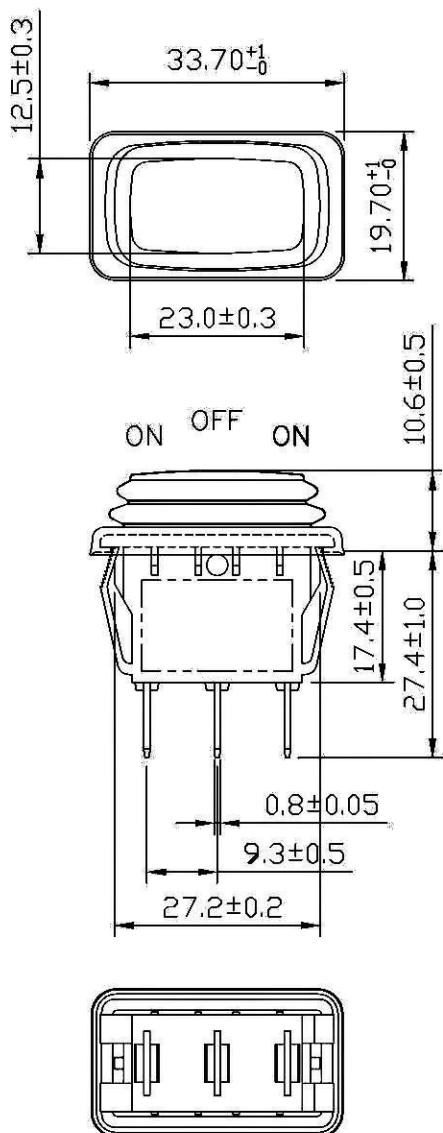

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 8/25/09

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB238D801BB**