








Rating	16A 125VAC 10A 250VAC		
Contact Resistance		50m ohm Max.	
Insulation Resistance		DC 500V 100M ohm Min.	
Dielectric Strength		AC 2500V 1 minute	
Operation Temp.		- 25 ° C ~ 85 ° C	
Function		6P DPDT ON - ON	

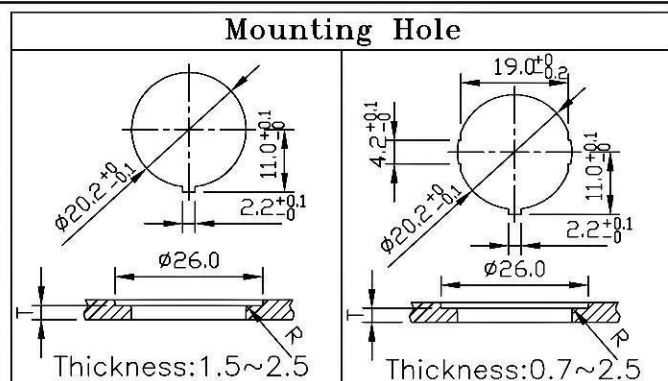

Circuit Diagram



Frame: Black, Nylon 66 (94-V2)
 Actuator: Black, PC (94-V2)
 Waterproof rubber: Black, Silicone
 Terminals: Silver plated, Copper alloy
 Printed: None
 Waterproof: IP65

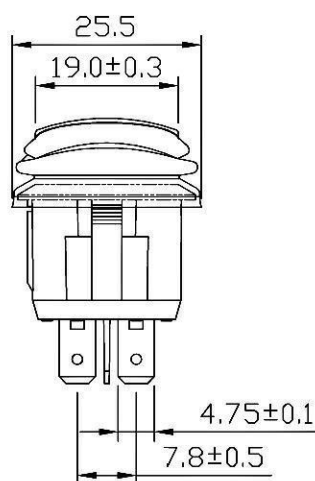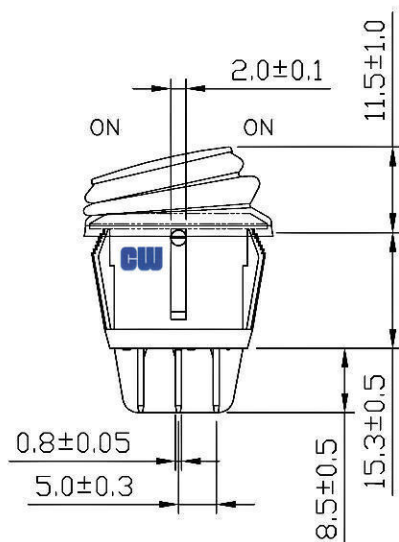

RoHS Compliant

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 6/13/08

Rev. 1

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB244C802BB**