


Rating	20A 125V AC, 16A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm max.			
Insulation Resistance	DC 500V 100M ohm min.			
Dielectric Strength	AC 1500V 1 minute			
Operating Temperature	-25° C ~ 85° C			
Switch Function	2P SPST ON - OFF			





MATERIAL:

Frame: Nylon 66 (94 v-2), Black

Actuator: Nylon 66 (94 v-2), Black

Terminals: Silver plated Copper alloy.

Printed: White, Hot stamping

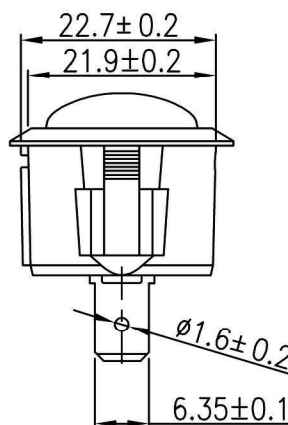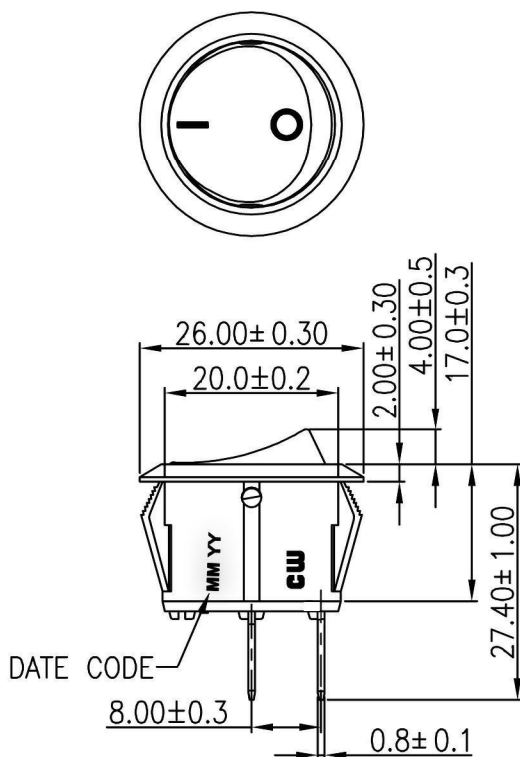

RoHS Compliant

1 Revised 7/14/2010 - Added I O to button.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 12/21/09

Rev. 1

Unit: mm

Checked By: G.Guld

Title:
ROCKER SWITCH

CW P/N:
GRB293A01BB