


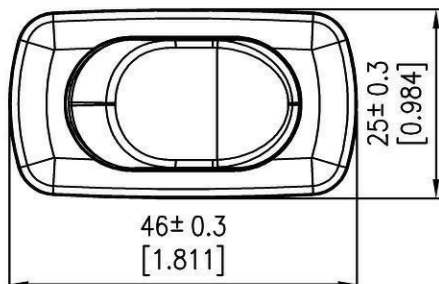
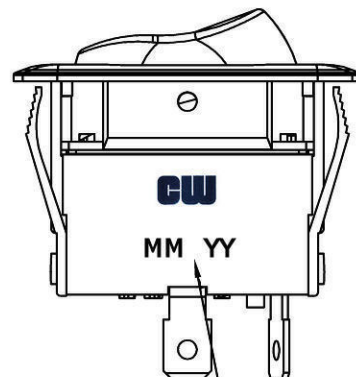



Rating	16A 125VAC 10A 277VAC 3/4HP		Mounting Hole		Circuit Diagram												
	21A 14VDC																
Contact Resistance	50m ohm Max.		<table><tr><th>Thickness</th><th>X</th><th>Y</th></tr><tr><td>0.75~1.25</td><td>21.2+0.1</td><td>36.6+0.1</td></tr><tr><td>1.25~2</td><td>21.2+0.1</td><td>36.8+0.1</td></tr><tr><td>2~3</td><td>21.2+0.1</td><td>37.0+0.1</td></tr></table>		Thickness	X	Y	0.75~1.25	21.2+0.1	36.6+0.1	1.25~2	21.2+0.1	36.8+0.1	2~3	21.2+0.1	37.0+0.1	
Thickness	X	Y															
0.75~1.25	21.2+0.1	36.6+0.1															
1.25~2	21.2+0.1	36.8+0.1															
2~3	21.2+0.1	37.0+0.1															
Insulation Resistance	DC 500V 100M ohm Min.																
Dielectric Strength	AC 1500V 1 minute																
Switch Function	2P SPST ON-OFF																
Operation Temperature	-20°C~85°C																

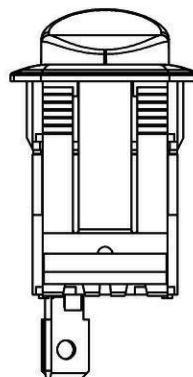

Material:
 Frame: Black, Nylon#66
 Actuator: Black, Nylon#66
 Printed: None
 Water proof and dust proof to fit IP-56

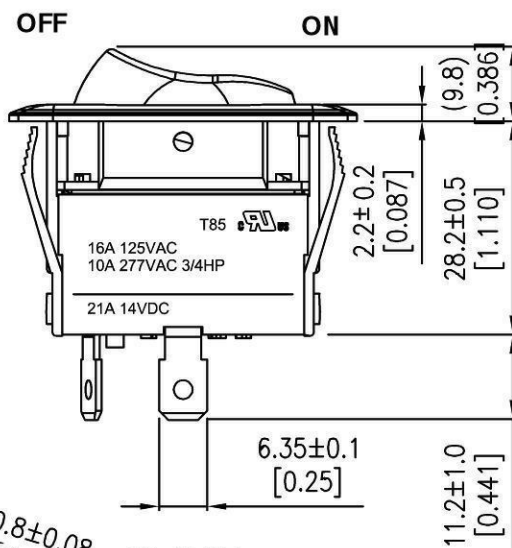

DATE CODE

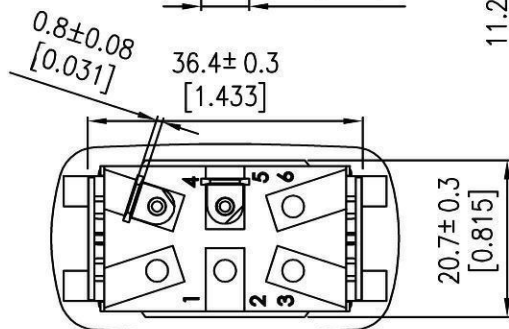

RoHS Compliant

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/15/10

Rev. 1

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB263A0BBNN**