




Rating	20A 125VAC 10A 25VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP	Mounting Hole	Circuit Diagram
	21A 14VDC		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~85°		
Switch Function	3P SPST ON-OFF(Neon)	Thickness(mm)	X(mm)
		0.75~1.25	36.6 ^{+0.2} ₋₀
		1.25~2.0	36.8 ^{+0.2} ₋₀
		2.0~3.0	37.0 ^{+0.2} ₋₀

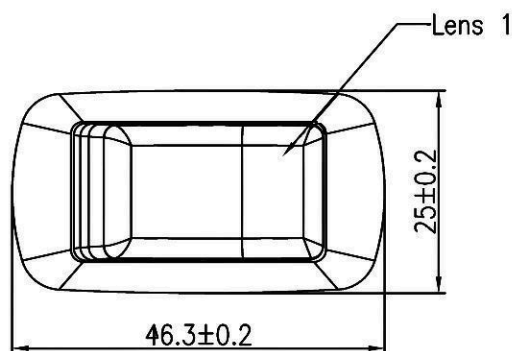

MATERIAL:




Frame: Nylon 66, Black

Actuator: Nylon 66 with 33%GF, Black

Lens: PC, Red

Lamp: Neon, Red

Water proof and dust proof to fit IP-56

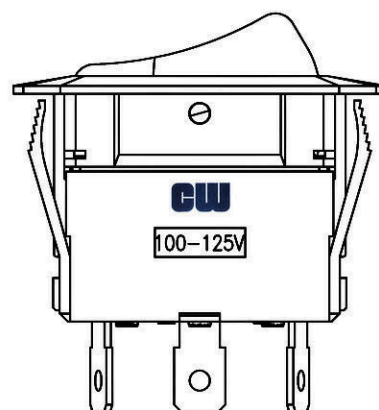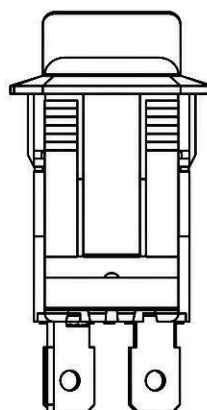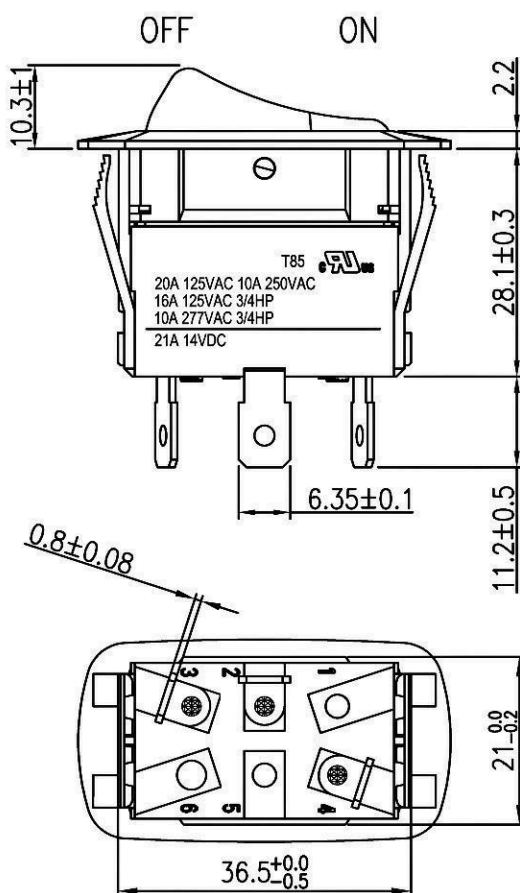

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 10/08/09

Rev. 1

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB260A401BBRN2**