




Rating	20A 125VAC 10A 25VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP	Mounting Hole 			Circuit Diagram 
	21A 14VDC				
	50m ohm Max.				
	DC 500V 100M ohm Min.				
Contact Resistance		Thickness(mm)	X(mm)	Y(mm)	
Insulation Resistance	DC 500V 100M ohm Min.	0.75~1.25	21.2+0.1	36.6 ^{+0.2} ₋₀	
Dielectric Strength	AC 1500V 1 minute	1.25~2.0		36.8 ^{+0.2} ₋₀	
Operation Temperature	-20°~85°	2.0~3.0		37.0 ^{+0.2} ₋₀	
Switch Function	2P SPST (ON)-OFF				

() = Momentary Function



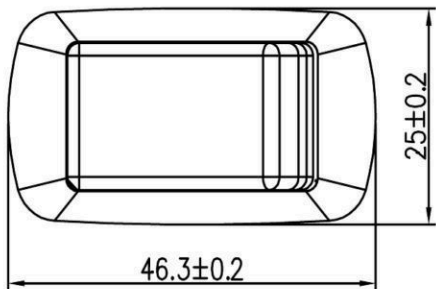


MATERIAL:


Frame: Nylon 66, Black

Actuator: Nylon 66 with 33%GF, Black

Water proof and dust proof to fit IP-56

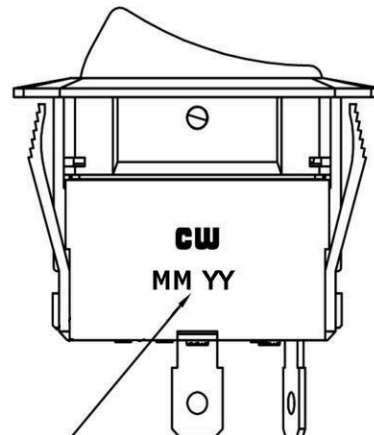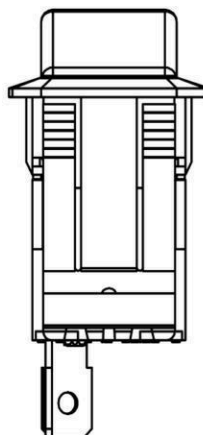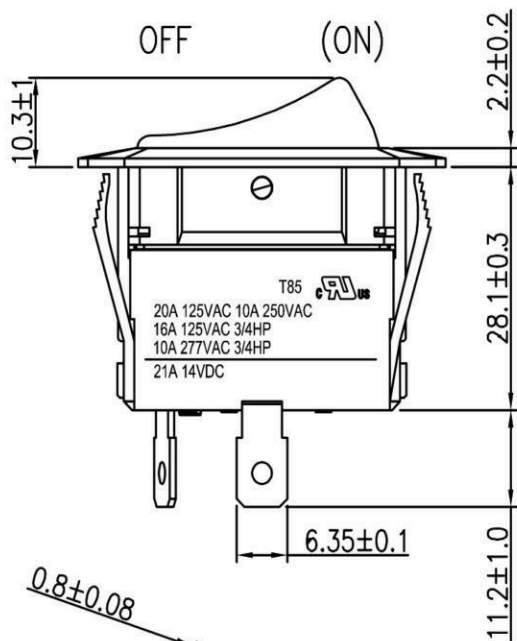

DATE CODE

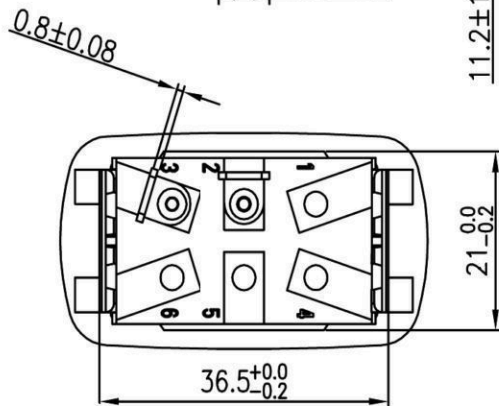

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/18/10

Rev. 0

Unit: mm

Checked By: EJP

Title: **ROCKER SWITCH**

CW P/N: **GRB260N101BBNN**