
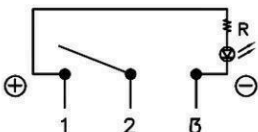


Rating	21A 14VDC		<div>Mounting Hole</div> <div></div> <table><tr><td>Thickness</td><td>X</td><td>Y</td></tr><tr><td>0.75~5mm</td><td>36.8^{+0.2}₋₀</td><td>15.3^{+0.2}₋₀</td></tr><tr><td>0.03~0.2Inch</td><td>1.45^{+0.008}₋₀</td><td>.60^{+0.008}₋₀</td></tr></table>	Thickness	X	Y	0.75~5mm	36.8 ^{+0.2} ₋₀	15.3 ^{+0.2} ₋₀	0.03~0.2Inch	1.45 ^{+0.008} ₋₀	.60 ^{+0.008} ₋₀	<div>Circuit Diagram</div> <div></div> <div>12V R=680 ohm</div>
Thickness	X	Y											
0.75~5mm	36.8 ^{+0.2} ₋₀	15.3 ^{+0.2} ₋₀											
0.03~0.2Inch	1.45 ^{+0.008} ₋₀	.60 ^{+0.008} ₋₀											
Contact Resistance	50m ohm Max.												
Insulation Resistance	DC 500V 100M ohm Min.												
Dielectric Strength	AC 1500V 1 minute												
Operation Temp.	- 20° C ~ 85° C												
Function	3P SPST ON-OFF (Led)												

Material:


Frame: Black, Nylon# 66

Actuator: Black, Nylon#66+33%GF

Lens: Red, PC

Printed: None

Water proof and dust proof to fit IP-56

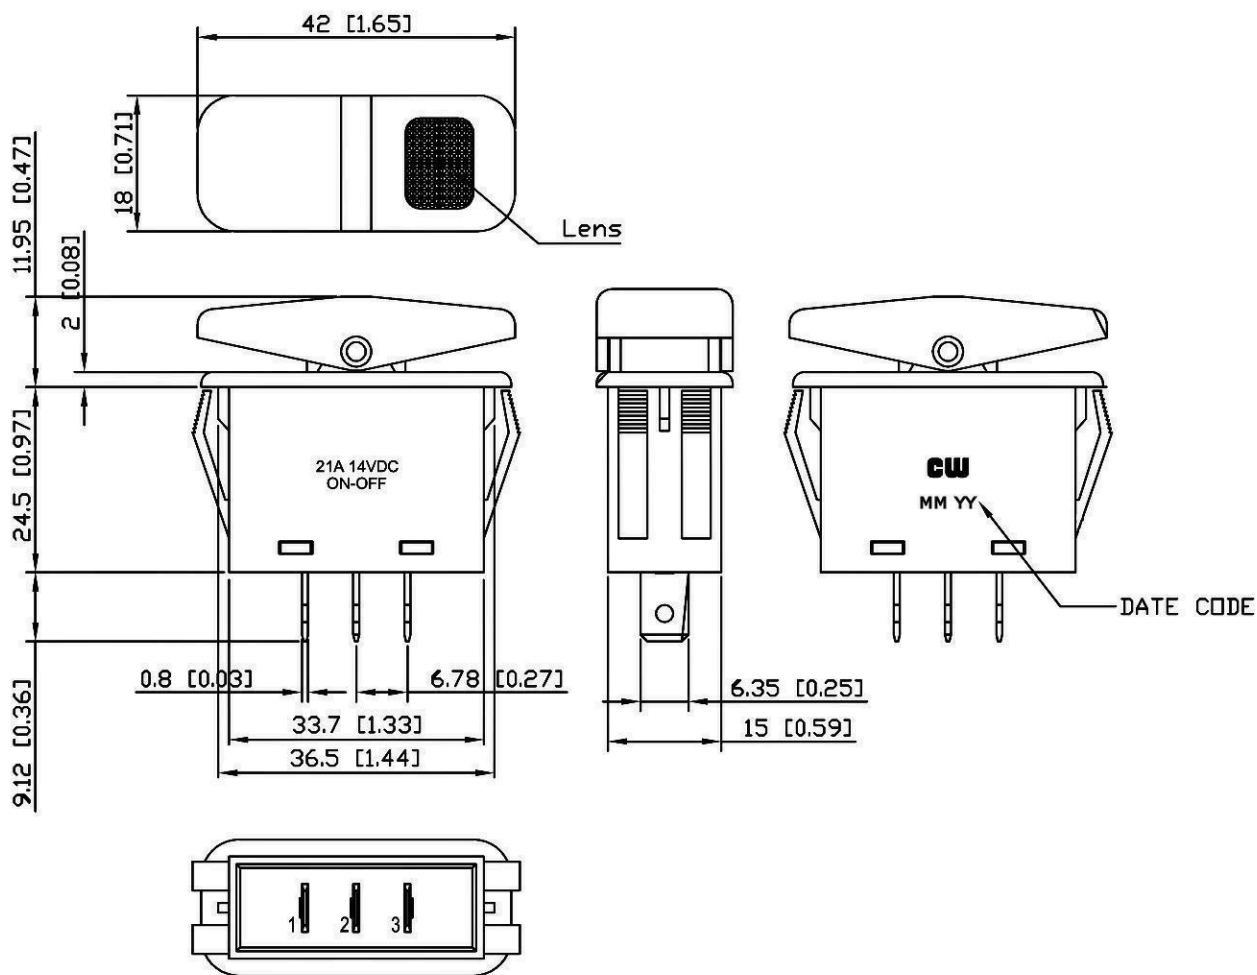

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB258B01BR1**