



Rating	20A 125VAC 10A 25VAC 16A 125VAC 3/4HP 10A 277VAC 3/4HP 	Mounting Hole	Circuit Diagram
	21A 14VDC		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~+85°		
Switch Function	3P SPDT ON-ON	Thickness(mm)	X(mm)
		0.75~1.25	36.6 ^{+0.2} _{-0.2}
		1.25~2.0	36.8 ^{+0.2} _{-0.2}
		2.0~3.0	37.0 ^{+0.2} _{-0.2}






*** MATERIAL:**

Frame: Nylon#66, Black

Actuator: Nylon#66 with 33%GF, Black

Printed: None

Water proof and dust proof to fit IP-56

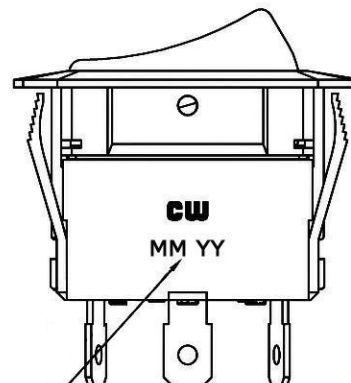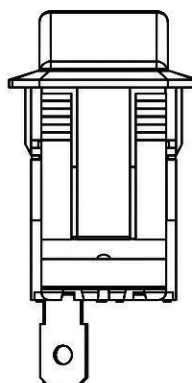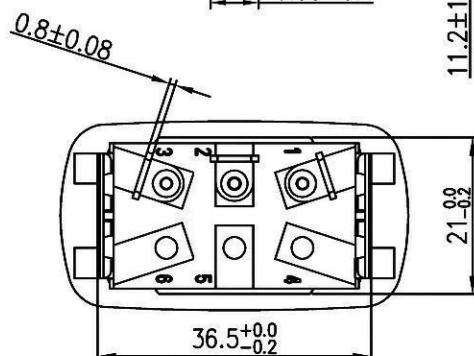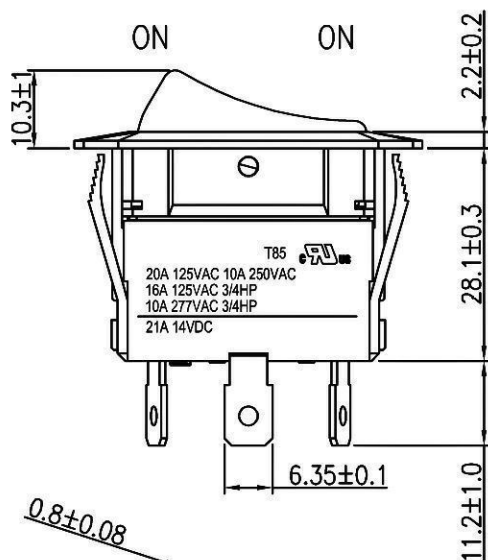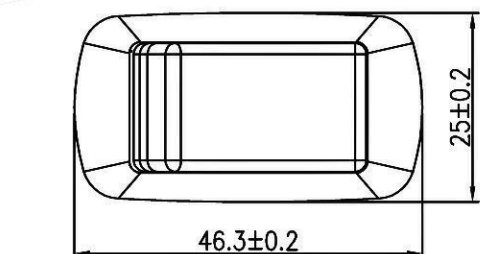

DATE CODE

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/18/10

Rev. 0

Unit: mm

Checked By: **EJP**

Title:

ROCKER SWITCH

CW P/N:

GRB260C101BBNN