



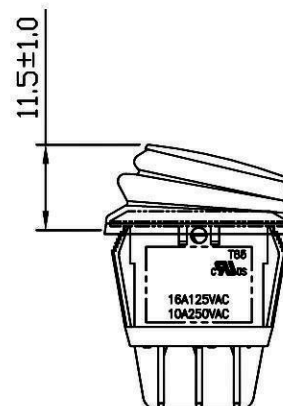
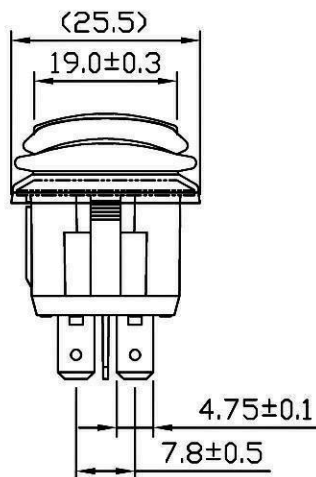
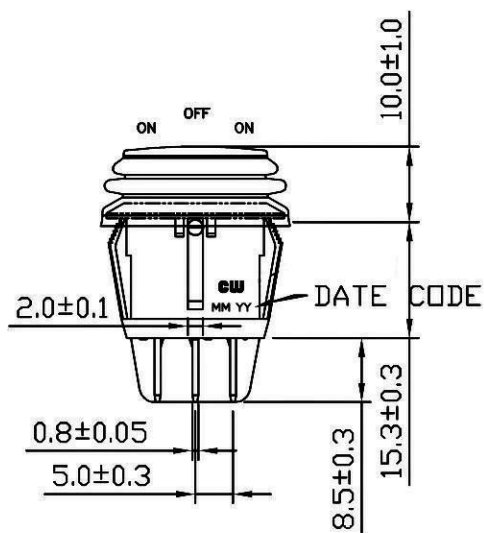



Rating	16A 125VAC 10A 250VAC		Mounting Hole	
				
Contact Resistance	50m ohm Max.		Thickness:1.5~2.5	
Insulation Resistance	DC 500V 100M ohm Min.		Thickness:0.7~2.5	
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	6P DPDT ON-OFF-ON			

Frame: Black, Nylon 66 (94-V2)
 Actuator: Black, PC (94-V2)
 Waterproof rubber: Black, Silicone
 Printed: None
 Waterproof: IP65

Circuit Diagram



RoHS Compliant

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 5/17/10

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB244D802BB**