




THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 125VAC 10A 277VAC 3/HP			Mounting Hole													
	21A 14V DC																
Contact Resistance	50m ohm max.			<table><tr><th>Thickness</th><th>X</th><th>Y</th></tr><tr><td>0.75 - 1.25</td><td>21.2 + 0.1</td><td>36.6 + 0.1</td></tr><tr><td>1.25 - 2.00</td><td>21.2 + 0.1</td><td>36.8 + 0.1</td></tr><tr><td>2.00 - 3.00</td><td>21.2 + 0.1</td><td>37.0 + 0.1</td></tr></table>		Thickness	X	Y	0.75 - 1.25	21.2 + 0.1	36.6 + 0.1	1.25 - 2.00	21.2 + 0.1	36.8 + 0.1	2.00 - 3.00	21.2 + 0.1	37.0 + 0.1
Thickness	X	Y															
0.75 - 1.25	21.2 + 0.1	36.6 + 0.1															
1.25 - 2.00	21.2 + 0.1	36.8 + 0.1															
2.00 - 3.00	21.2 + 0.1	37.0 + 0.1															
Insulation Resistance	DC 500V 100M ohm min.																
Dielectric Strength	AC 1500V 1 minute																
Operating Temperature	-20 °C ~ 85 °C																

BASE COLOR: Black

BUTTON COLOR: Black

LED: Red

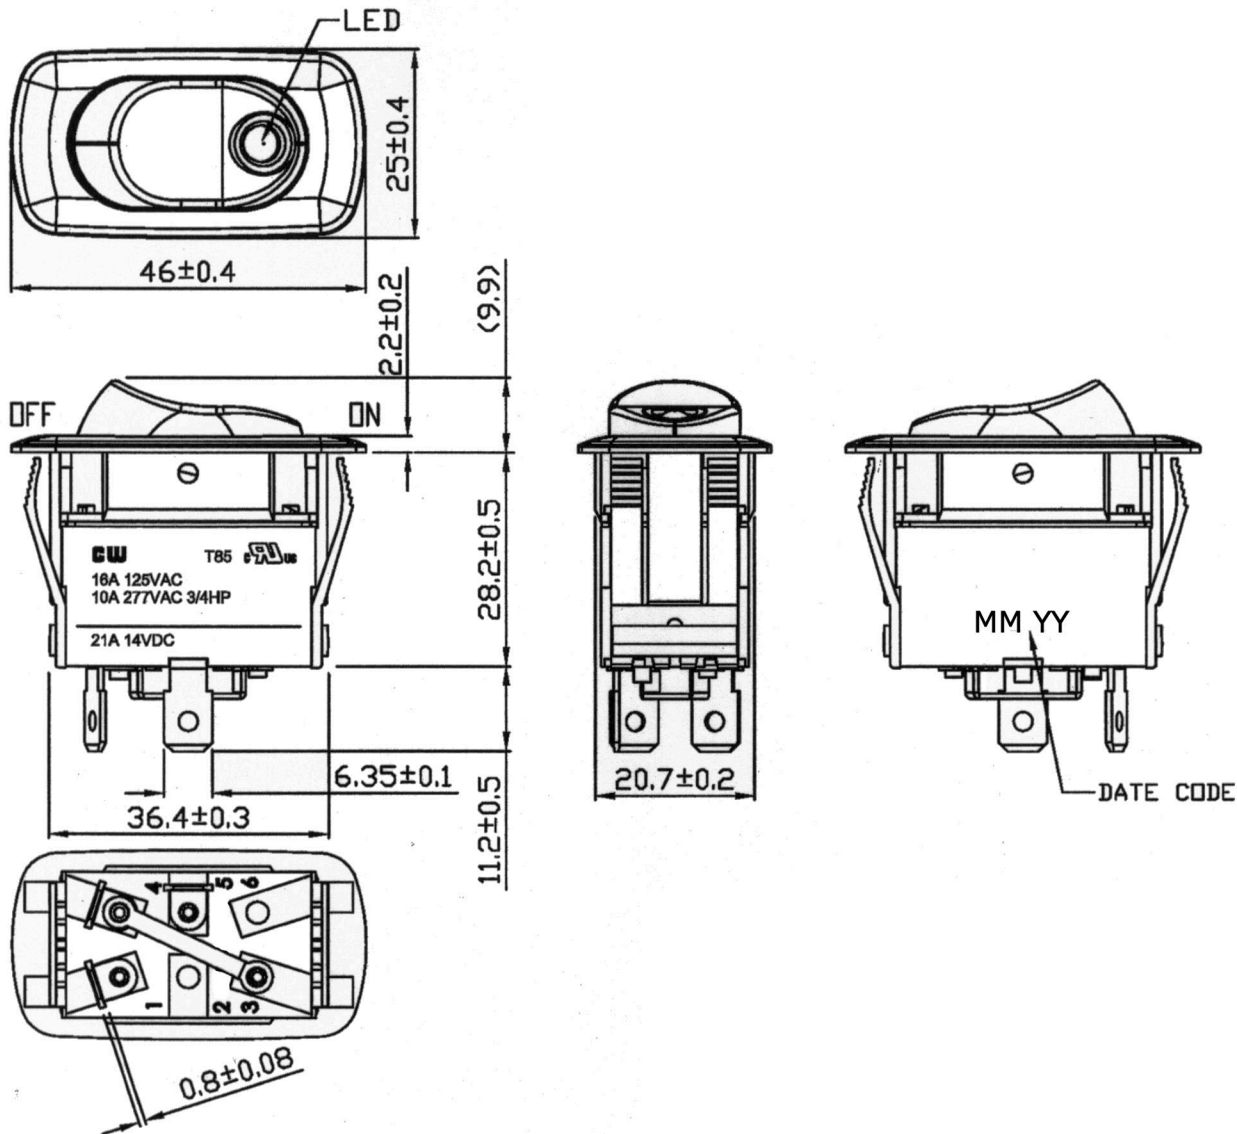

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 12/21/09

Rev. 0

Unit: mm

Checked By: G. Guld

Title:
ROCKER SWITCH

CW P/N:
GRB263A101RN1D