



Rating	21A 14VDC	Mounting Hole 			Circuit Diagram 
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-20°~85°				
Switch Function	4P SPDT ON-ON	Thickness(mm) 0.75~1.25	X(mm) 21.2+0.1	Y(mm) 36.6^{+0.2}₋₀	
		1.25~2.0		36.8^{+0.2}₋₀	
		2.0~3.0		37.0^{+0.2}₋₀	

*** MATERIAL:**



Frame: Nylon#66, Black

Actuator: Nylon#66 with 33%GF, Black

Lens 1: PC, Red

Lens 2: PC, Green

Water proof and dust proof to fit IP-56

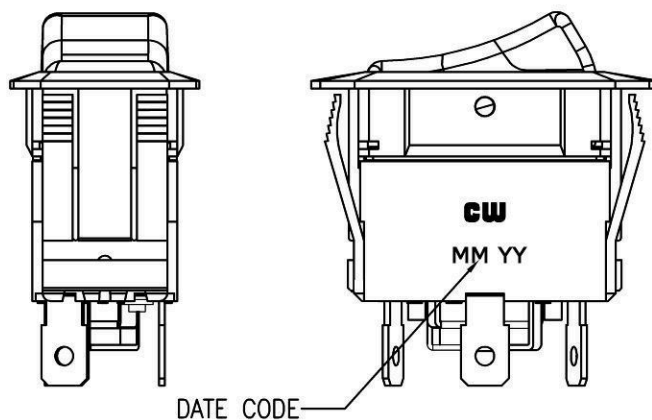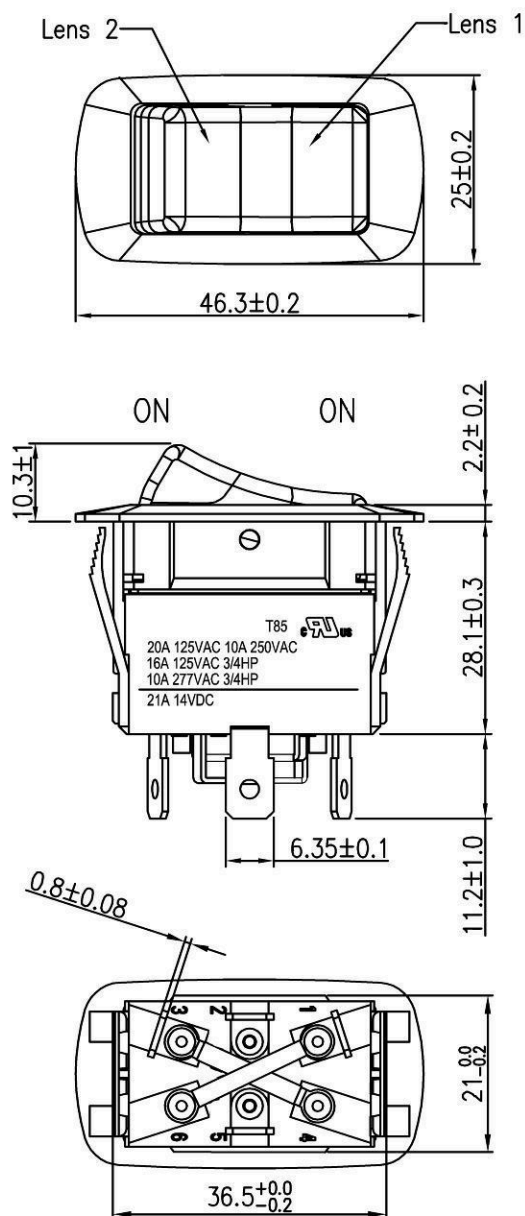

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/19/10

Rev. 0

Unit: mm

Checked By: EJP

Title: **ROCKER SWITCH**

CW P/N: **GRB260C501BBRG1**