



Rating	20A 125VAC 3/4HP 125VAC	Mounting Hole			Circuit Diagram 
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-20°C~85°C	Thickness	X	Y	
Switch Function	6P DPDT ON-OFF-ON	0.75~1.25	21.2+0.1	36.6+0.1	
		1.25~2	21.2+0.1	36.8+0.1	
		2~3	21.2+0.1	37.0+0.1	


Material:

Frame: Black, Nylon#66

Actuator: Black, Nylon#66+30%GF

Printed: None

Water proof and dust proof to fit IP-66

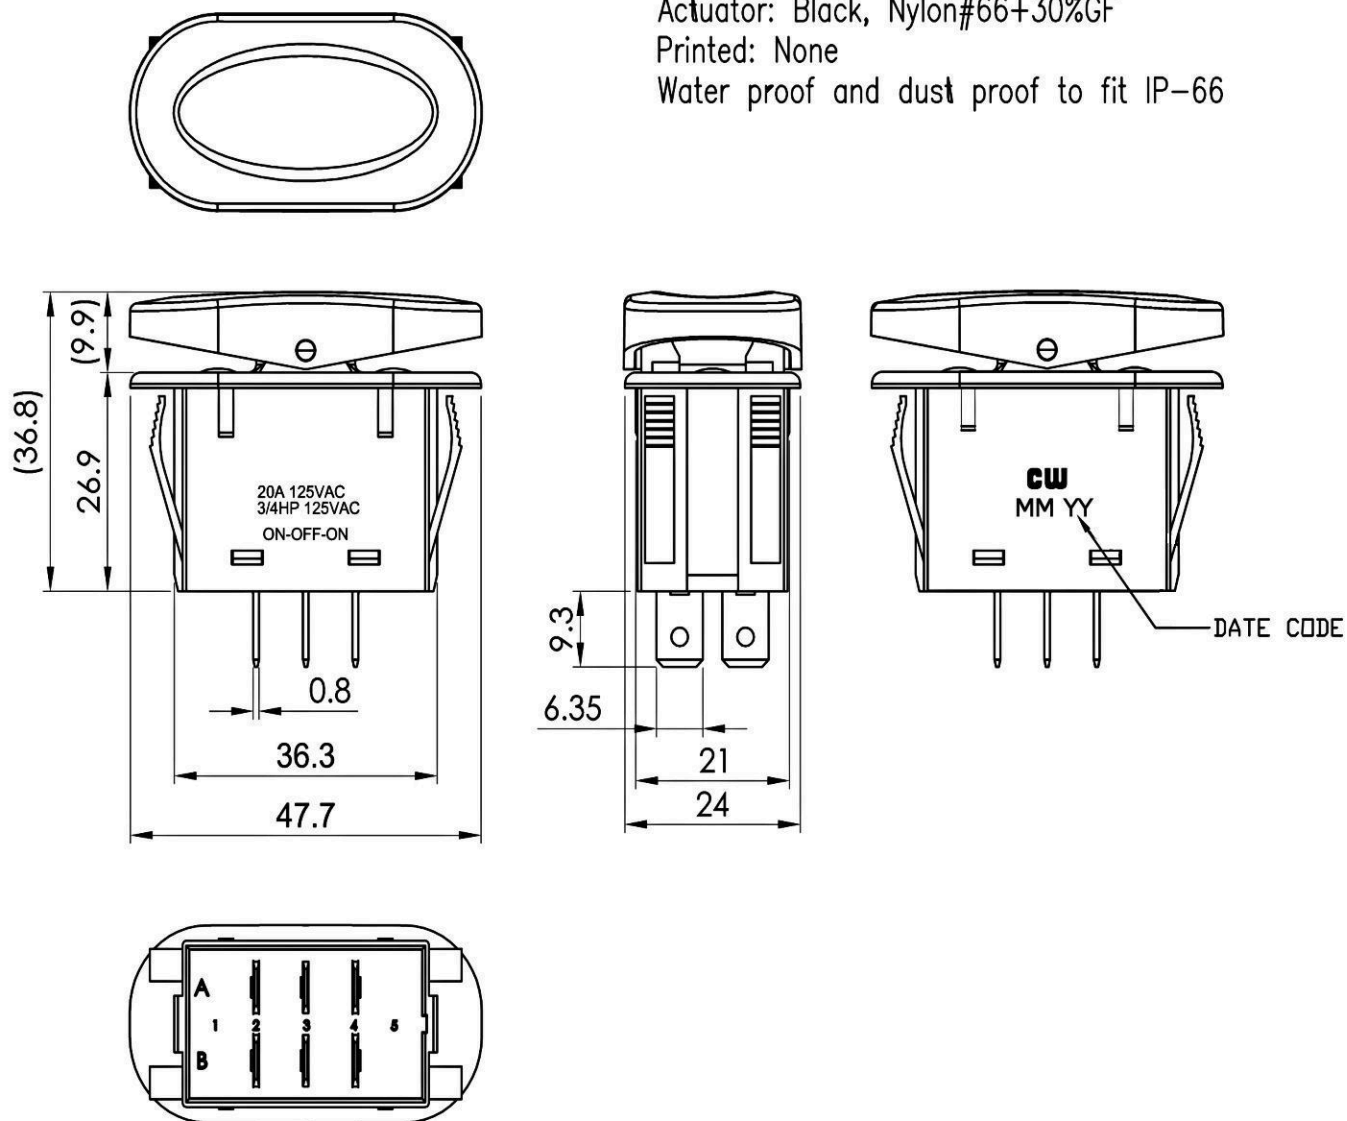

RoHS Compliant

TOLERANCE: $\pm 0.3\text{mm}$ ($\pm 0.0012\text{inch}$) UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/18/10

Rev. 0

Unit: mm

Checked By: EJP

Title: **ROCKER SWITCH**

CW P/N: **GRB271E1BBNNNN**