




THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

| Rating                | 16A 125VAC<br>10A 277VAC 3/HP |            |  | Mounting Hole                                                                                                                                                                                                                                                           |           | <br><b>SPDT ON - ON</b> |   |             |            |            |             |            |            |             |            |            |  |
|-----------------------|-------------------------------|------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|---|-------------|------------|------------|-------------|------------|------------|-------------|------------|------------|--|
|                       | 21A 14V DC                    |            |                                                                                 |                                                                                                                                                                                        |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
|                       |                               |            |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| Contact Resistance    | 50m ohm max.                  |            |                                                                                 | <table><tr><th>Thickness</th><th>X</th><th>Y</th></tr><tr><td>0.75 - 1.25</td><td>21.2 + 0.1</td><td>36.6 + 0.1</td></tr><tr><td>1.25 - 2.00</td><td>21.2 + 0.1</td><td>36.8 + 0.1</td></tr><tr><td>2.00 - 3.00</td><td>21.2 + 0.1</td><td>37.0 + 0.1</td></tr></table> | Thickness | X                                                                                                          | Y | 0.75 - 1.25 | 21.2 + 0.1 | 36.6 + 0.1 | 1.25 - 2.00 | 21.2 + 0.1 | 36.8 + 0.1 | 2.00 - 3.00 | 21.2 + 0.1 | 37.0 + 0.1 |  |
| Thickness             | X                             | Y          |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| 0.75 - 1.25           | 21.2 + 0.1                    | 36.6 + 0.1 |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| 1.25 - 2.00           | 21.2 + 0.1                    | 36.8 + 0.1 |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| 2.00 - 3.00           | 21.2 + 0.1                    | 37.0 + 0.1 |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| Insulation Resistance | DC 500V 100M ohm min.         |            |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| Dielectric Strength   | AC 1500V 1 minute             |            |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |
| Operating Temperature | -20 °C ~ 85 °C                |            |                                                                                 |                                                                                                                                                                                                                                                                         |           |                                                                                                            |   |             |            |            |             |            |            |             |            |            |  |

BASE COLOR: Black  
BUTTON COLOR: Black

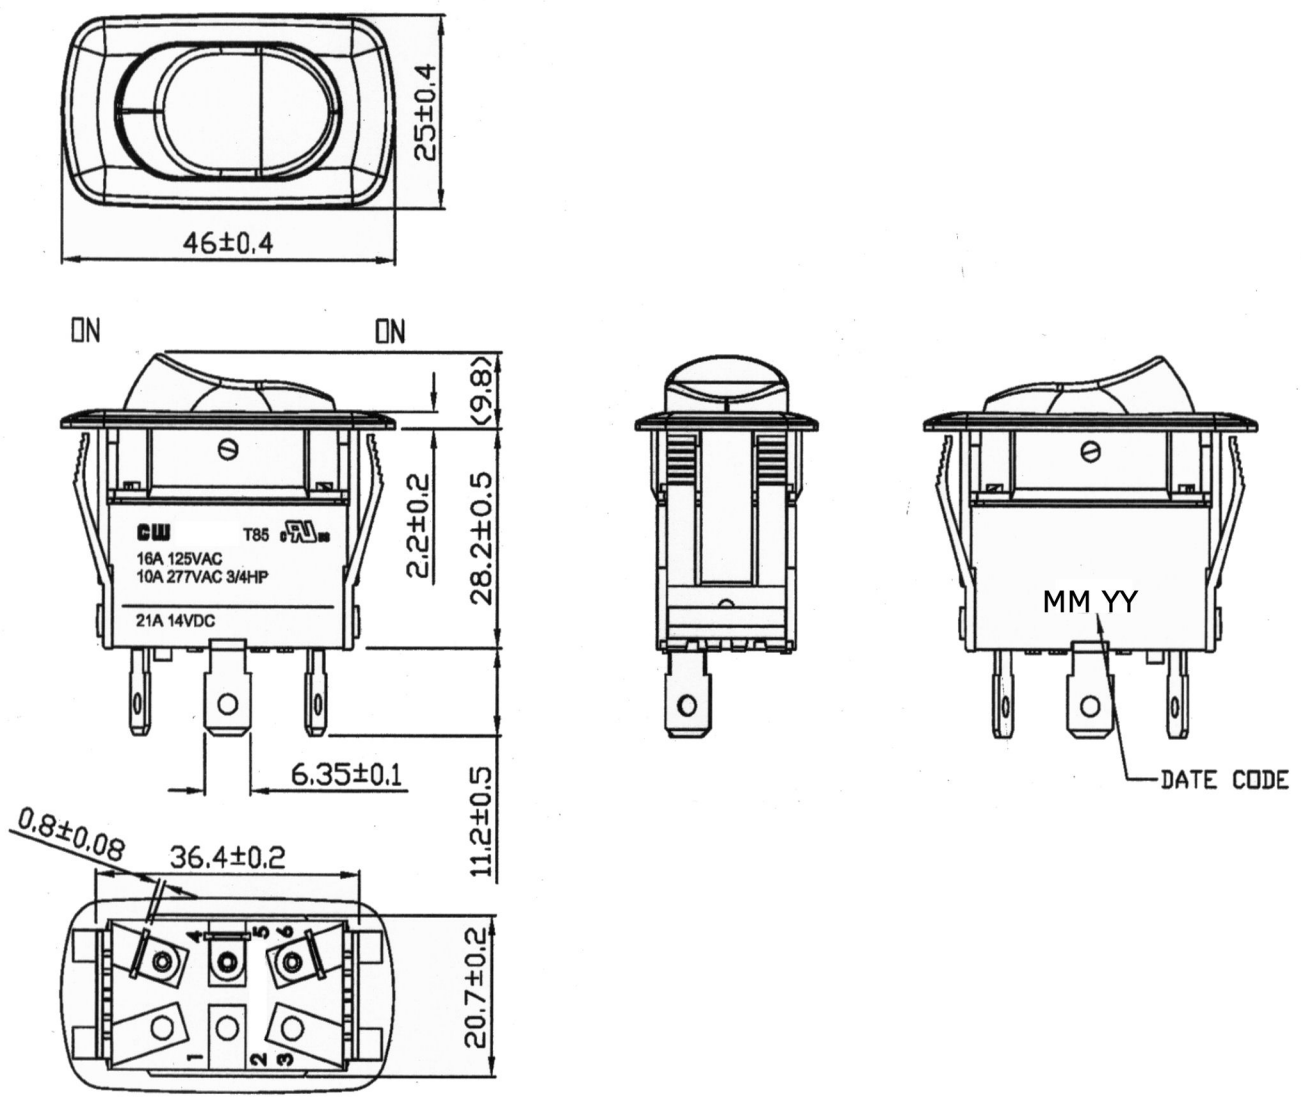

RoHS Compliant

|                                                                                                                                                                  |                             |        |                              |                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------|------------------------------|---------------------|
|  <b>INDUSTRIES</b><br>Southampton, Pa. 18966<br>Tel 215.355.7080/www.cwind.com | Date Drawn: 12/21/09        | Rev. 0 | Unit: mm                     | Checked By: G. Guld |
|                                                                                                                                                                  | Title: <b>ROCKER SWITCH</b> |        | CW P/N: <b>GRB263C001NNN</b> |                     |