








Rating	21A 14VDC	Mounting Hole			Circuit Diagram
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	- 25 °~ + 85 °				
Switch Function	2P SPST (ON) - OFF	Thickness(mm)	X(mm)	Y(mm)	
		0.75~1.25	21.0 ^{+0.3} ₀	36.6+0.1	
		1.25~2.0		36.8+0.1	
		2.0~3.0		37.0+0.1	

()=Momentary Function

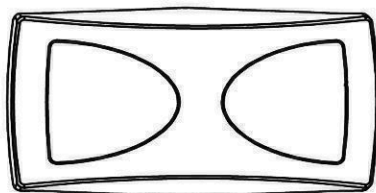

Material:

1. Frame: Nylon-66(94V-2)
Actuator: Nylon-66+33%GF
Lens: PC
Terminal: Silver plated copper
(excepted lamp terminal)
- Printed: None
2. Water proof: "IP-66"

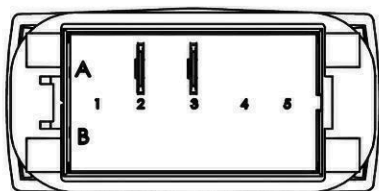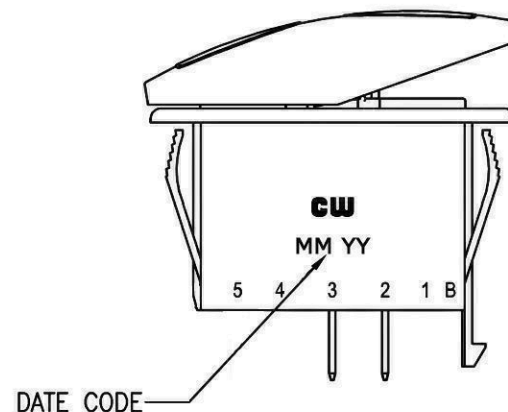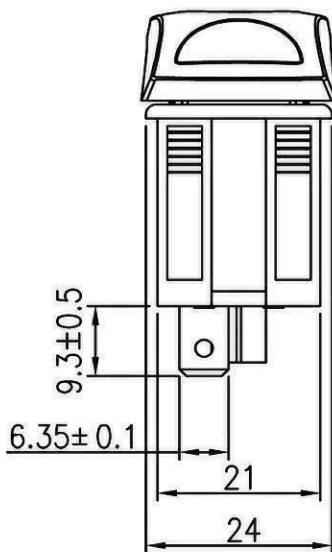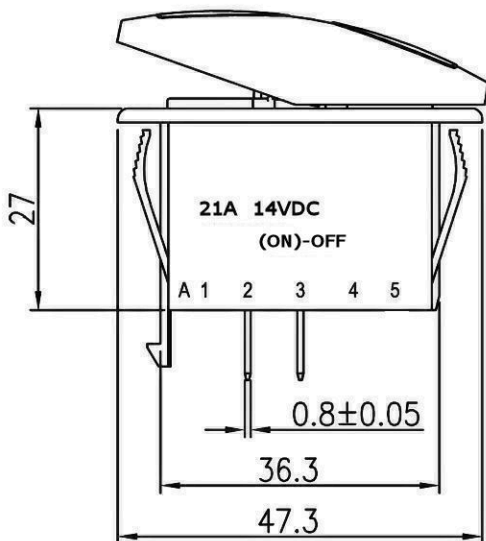

RoHS Compliant

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: EJP

Title:

ROCKER SWITCH

CW P/N:

GRB292N101BBNN1