



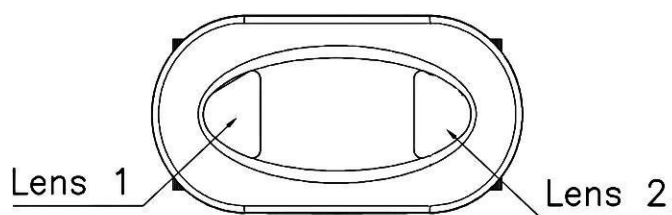
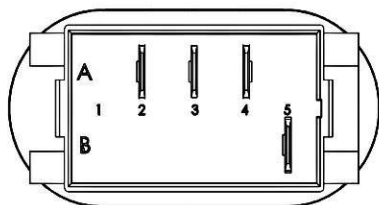
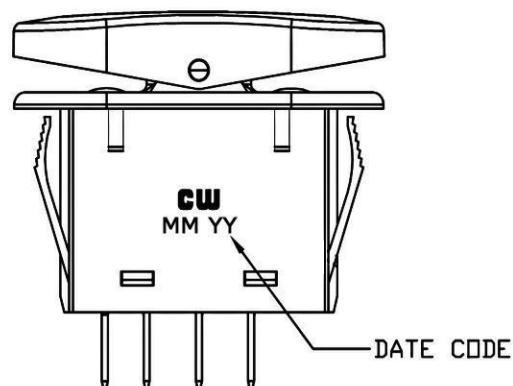


Rating	21A 14VDC	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1minute			
Operation Temperature	-20°~85°			
Switch Function	4P SPDT ON-OFF-ON	Thickness	X Y	
		0.75~1.25	21.2+0.1 36.6+0.1	
		1.25~2	21.2+0.1 36.8+0.1	
		2~3	21.2+0.1 37.0+0.1	

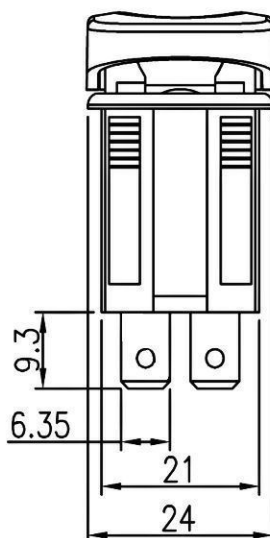

Material:
 Frame: Nylon# 66, Black
 Actuator: Nylon# 66+30%GF, Black
 Lens1: Green, PC
 Lens2: Red, PC
 Terminal: Silver plated copper(excepted lamp terminal)
 Printed: None
 Water proof and dust proof to fit IP-66

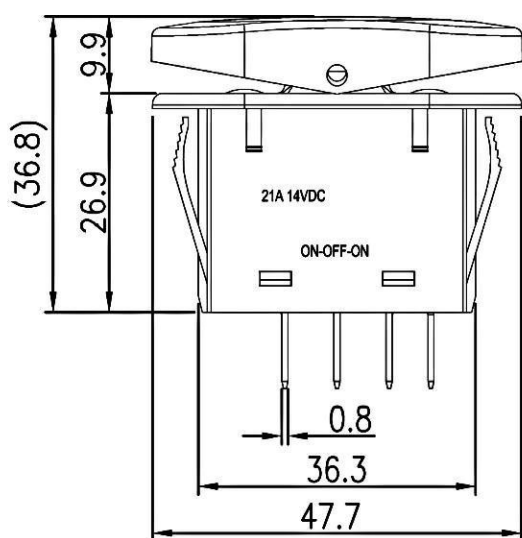

RoHS Compliant

TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 5/18/10

Rev. 0

Unit: mm

Checked By: **EJP**

Title:

ROCKER SWITCH

CW P/N:

GRB271D3BBGR2D1