



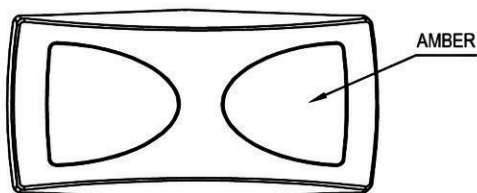
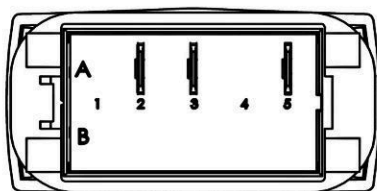
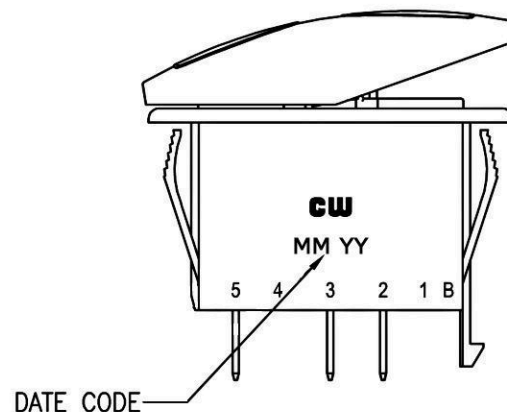


Rating	10A 24VDC	Mounting Hole 			Circuit Diagram 							
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.											
Dielectric Strength	AC 1500V 1 minute											
Operation Temperature	-25°~85°											
Switch Function	3P SPST ON-OFF	<table><tr><td>Thickness(mm)</td><td>X(mm)</td><td>Y(mm)</td></tr><tr><td>0.75~1.25</td><td rowspan="3">21.0^{+0.3}₀</td><td>36.6+0.1</td></tr><tr><td>1.25~2.0</td><td>36.8+0.1</td></tr><tr><td>2.0~3.0</td><td>37.0+0.1</td></tr></table>	Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.0 ^{+0.3} ₀	36.6+0.1	1.25~2.0	36.8+0.1	2.0~3.0	37.0+0.1
Thickness(mm)	X(mm)	Y(mm)										
0.75~1.25	21.0 ^{+0.3} ₀	36.6+0.1										
1.25~2.0		36.8+0.1										
2.0~3.0		37.0+0.1										

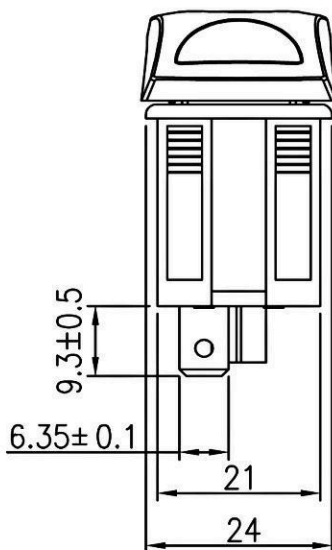

Material:

1. Frame: Nylon-66(94V-2)
- Actuator: Nylon-66+33%GF
- Lens: PC
- Terminal: Silver plated copper (excepted lamp terminal)
- Printed: None
2. Water proof: "IP-66"

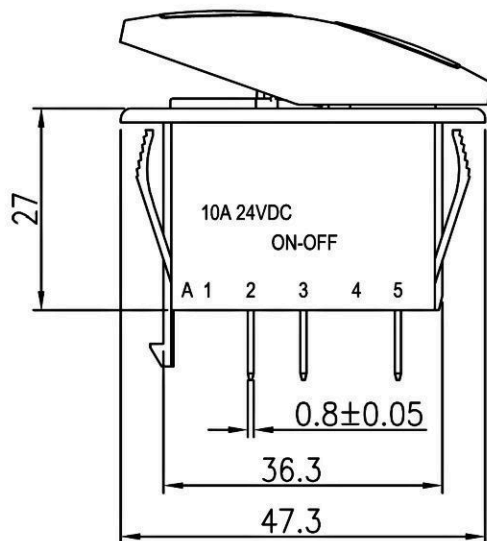

RoHS Compliant

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: EJP

Title:

ROCKER SWITCH

CW P/N:

GRB292A201BBNA2