


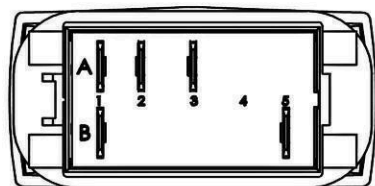
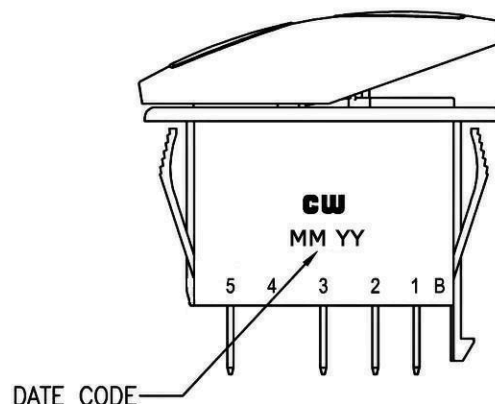
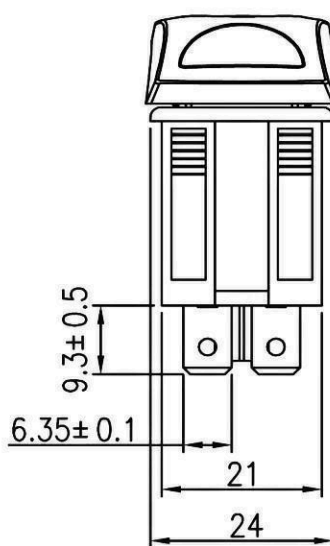
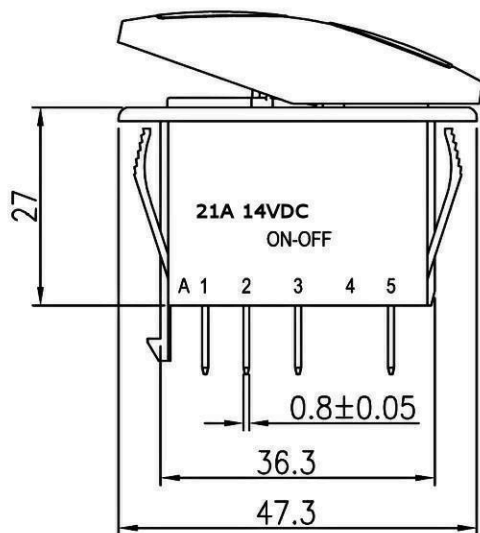


Rating	21A 14VDC	Mounting Hole 	Circuit Diagram 									
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.	<table><tr><td>Thickness(mm)</td><td>X(mm)</td><td>Y(mm)</td></tr><tr><td>0.75~1.25</td><td rowspan="3">21.0^{+0.3}₀</td><td>36.6+0.1</td></tr><tr><td>1.25~2.0</td><td>36.8+0.1</td></tr><tr><td>2.0~3.0</td><td>37.0+0.1</td></tr></table>	Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.0 ^{+0.3} ₀	36.6+0.1	1.25~2.0	36.8+0.1	2.0~3.0	37.0+0.1
Thickness(mm)	X(mm)		Y(mm)									
0.75~1.25	21.0 ^{+0.3} ₀		36.6+0.1									
1.25~2.0		36.8+0.1										
2.0~3.0		37.0+0.1										
Dielectric Strength	AC 1500V 1 minute											
Operation Temperature	- 25 ° ~ + 85 °											
Switch Function	5P SPST (ON) - OFF											

() = Momentary Function

Material:

- Frame: Nylon-66(94V-2)
Actuator: Nylon-66+33%GF
Lens 1: PC, Amber
Lens 2: PC, Green
Terminal: Silver plated copper
(excepted lamp terminal)
Printed: None
- Water proof: "IP-66"

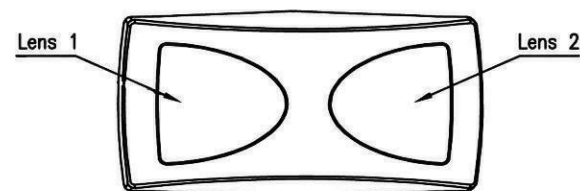

RoHS Compliant

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: EJP

Title:

ROCKER SWITCH

CW P/N:

GRB292N301BBAG1