



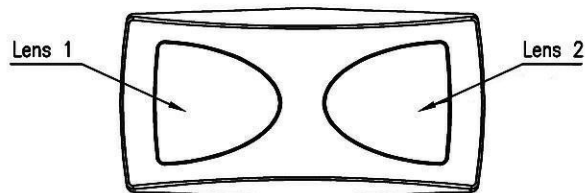
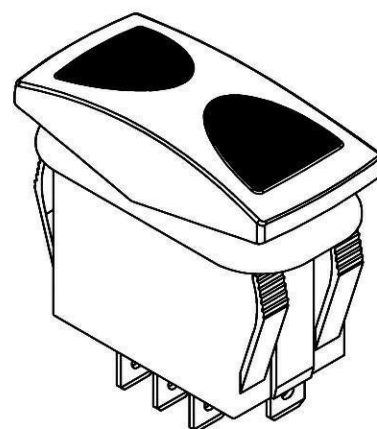
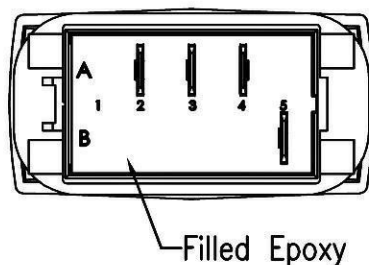


Rating	21A 14VDC	Mounting Hole  <table><thead><tr><th>Thickness(mm)</th><th>X(mm)</th><th>Y(mm)</th></tr></thead><tbody><tr><td>0.75~1.25</td><td rowspan="3">21.0^{+0.3}₀</td><td>36.6±0.1</td></tr><tr><td>1.25~2.0</td><td>36.8±0.1</td></tr><tr><td>2.0~3.0</td><td>37.0±0.1</td></tr></tbody></table>	Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.0 ^{+0.3} ₀	36.6±0.1	1.25~2.0	36.8±0.1	2.0~3.0	37.0±0.1	Circuit Diagram 
Thickness(mm)	X(mm)		Y(mm)										
0.75~1.25	21.0 ^{+0.3} ₀		36.6±0.1										
1.25~2.0			36.8±0.1										
2.0~3.0			37.0±0.1										
Contact Resistance	50m ohm Max.												
Insulation Resistance	DC 500V 100M ohm Min.												
Dielectric Strength	AC 1500V 1 minute												
Operation Temperature	-25°~85°												
Switch Function	4P SPDT ON-OFF-ON												

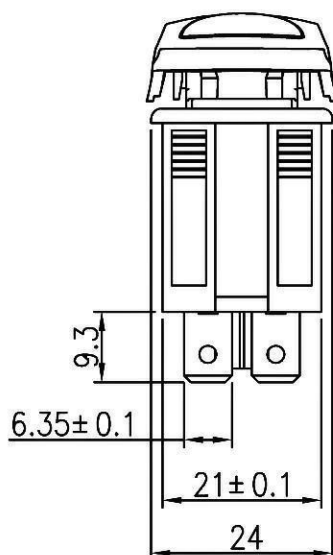

Material:

1. Frame: Black, Nylon 66 (94V-2)
Actuator: Black, Nylon 66+33% GF
Lens 1: Red, PC
Lens 2: Green, PC
Terminal: Silver plated copper
(except lamp terminal)
Printed: None
2. Waterproof: IP67

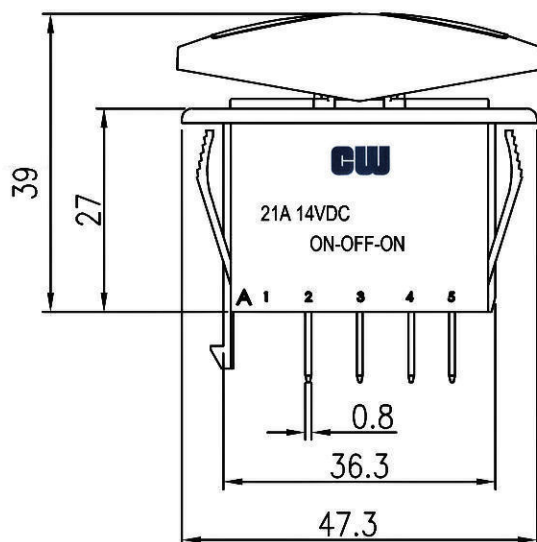

RoHS Compliant

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 9/29/09

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB292D301BBRG1**