





|                       |                       |                                                                                    |                                   |          |                                                                                     |
|-----------------------|-----------------------|------------------------------------------------------------------------------------|-----------------------------------|----------|-------------------------------------------------------------------------------------|
| Rating                | 21A 14VDC             | Mounting Hole                                                                      |                                   |          | Circuit Diagram                                                                     |
| Contact Resistance    | 50m ohm Max.          |  |                                   |          |  |
| Insulation Resistance | DC 500V 100M ohm Min. |                                                                                    |                                   |          |                                                                                     |
| Dielectric Strength   | AC 1500V 1 minute     |                                                                                    |                                   |          |                                                                                     |
| Operation Temperature | - 25 ° ~ + 85 °       |                                                                                    |                                   |          |                                                                                     |
| Switch Function       | 4P SPDT ON-ON         | Thickness(mm)                                                                      | X(mm)                             | Y(mm)    |                                                                                     |
|                       |                       | 0.75~1.25                                                                          | 21.0 <sup>+0.3</sup> <sub>0</sub> | 36.6±0.1 |                                                                                     |
|                       |                       | 1.25~2.0                                                                           |                                   | 36.8±0.1 |                                                                                     |
|                       |                       | 2.0~3.0                                                                            |                                   | 37.0±0.1 |                                                                                     |

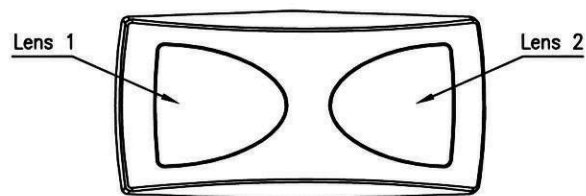

#### Material:

1. Frame: Nylon-66(94V-2)  
Actuator: Nylon-66+33%GF  
Lens 1: PC, Red  
Lens 2: PC, Green  
Terminal: Silver plated copper  
(excepted lamp terminal)
- Printed: None
2. Water proof: "IP-66"

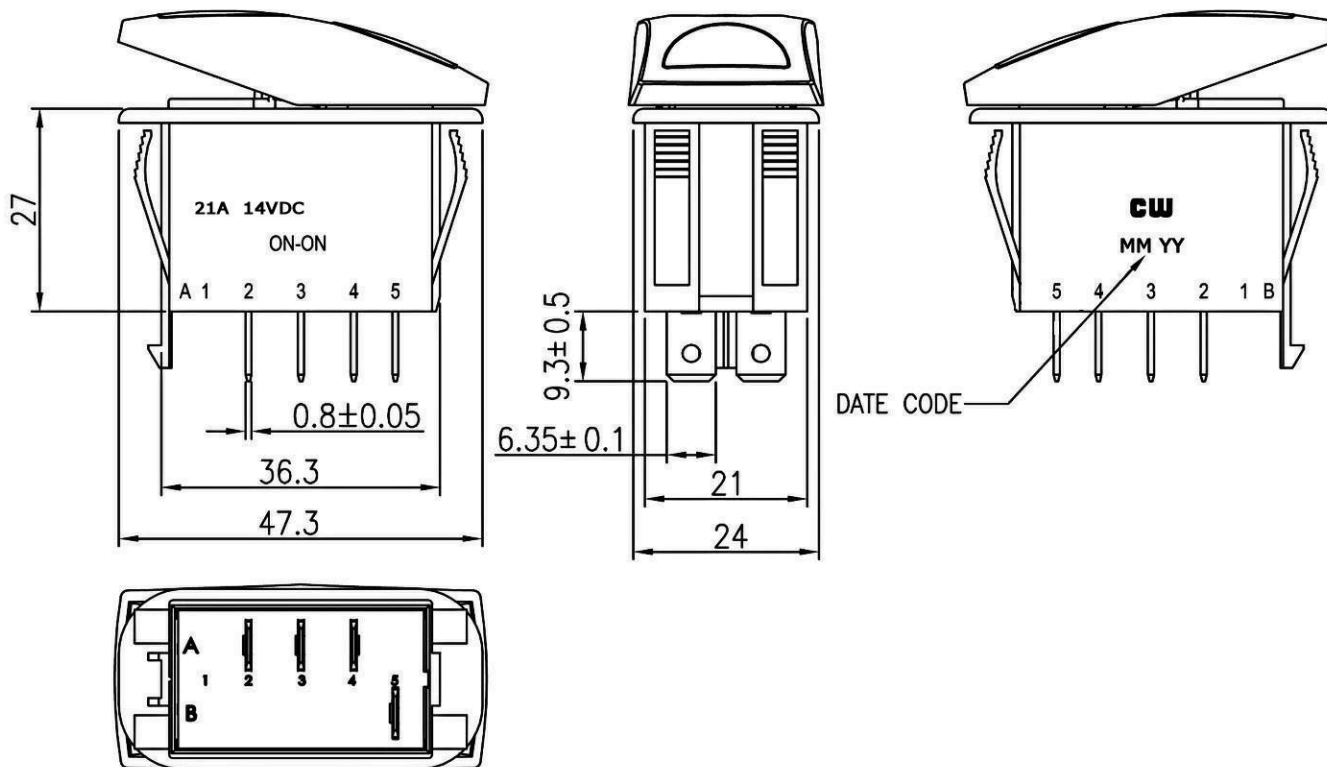

RoHS Compliant

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: 5/20/10

Rev. 0

Unit: mm

Checked By: EJP

Title: **ROCKER SWITCH**

CW P/N: **GRB292C301BBRG1**