


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

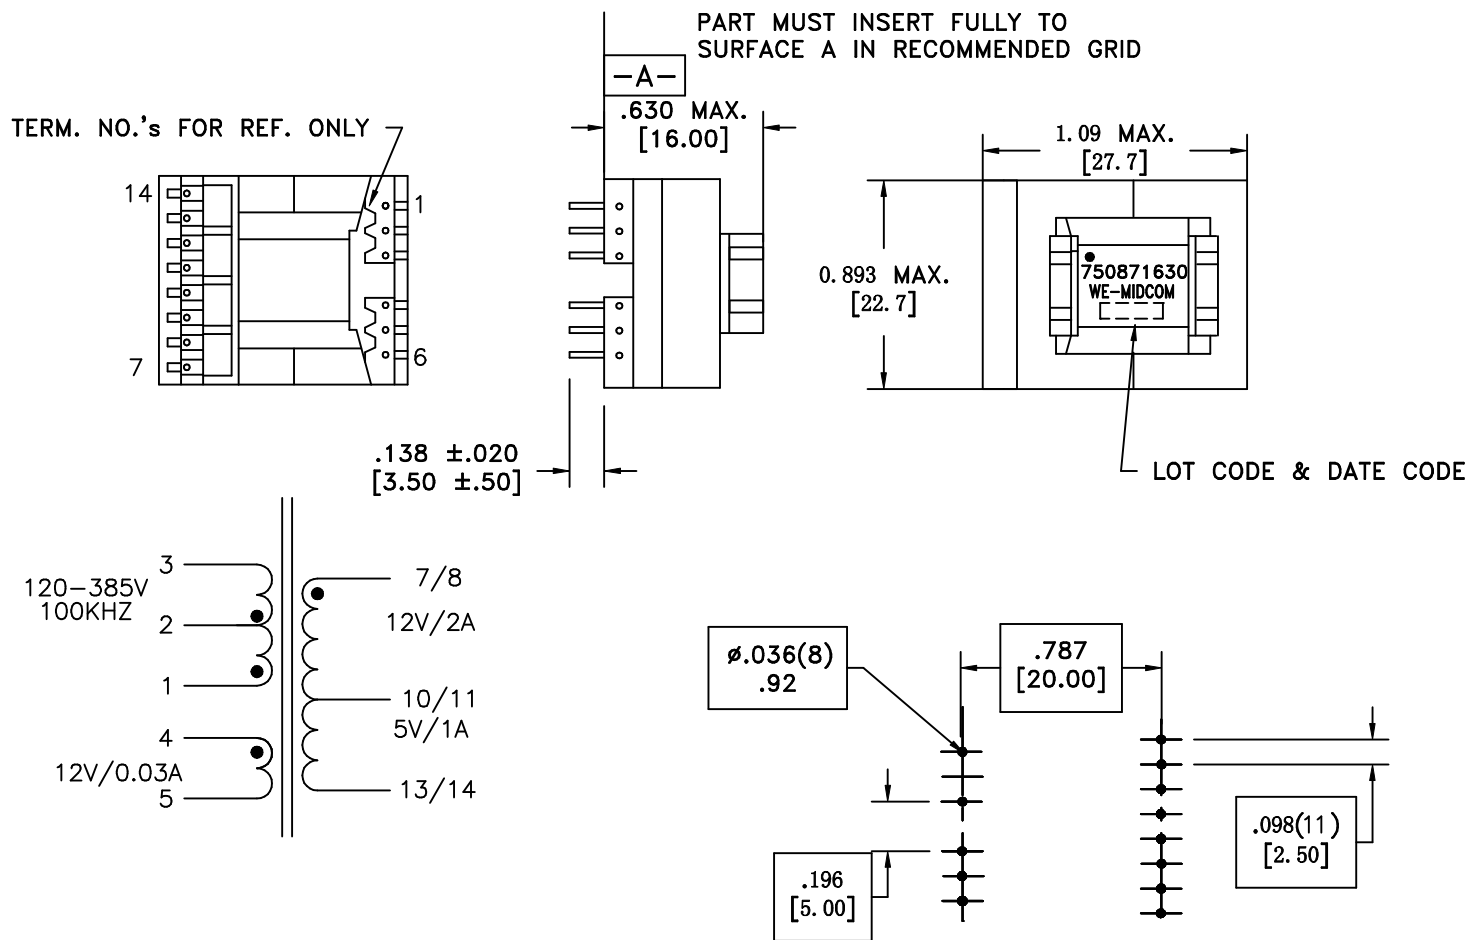

RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 1-3, 6.6 ohms max.
4-6, 1.0 ohms max.
7/8-13/14, 0.7 ohms max.

DIELECTRIC RATING: 4000VAC, 1 minute tested by applying 4800VAC for 1 second at 1-7(tie 3+4,7+8).
1500VAC, 1 minute tested by applying 1800VAC for 1 second at 1-6

INDUCTANCE: 500uH ±10%, 10kHz, 100mVAC, 1-3, Ls.

LEAKAGE INDUCTANCE: 10uH max, 10KHz, 100mVAC, 1-3 Lk, Tie others pins

URNS RATIO:
(3-1):(4-6) = 7.18:1, ±2%.
(3-1):(7/8-13/14) = 7.18:1, ±2%.
(3-1):(10/11-13/14) = 15.8:1, ±2%.

Unless otherwise specified:
Tolerances:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005[.13]

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: 750871630

REVISIONS: SEE SHEET 1

Midcom WE
www.midcom-inc.com

DRAWING NO.

750871630

REV.

00
9/08

SCALE ---

SHEET 2 OF 5

DWG.# 750871630