



Part No.	Emitting Color + Material	λ D (nm)	Lens Type	Iv (mcd) @ 20mA		Dimension
				Min.	Typ.	

KB2300EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	7	40	8.89mm x 3.81mm Size of Light Emitting Areas
KB-A100SRW	Super Bright Red GaAIAs	640	white diffused	18	80	
KB2400YW	Yellow GaAsP/GaP	588	white diffused	7	40	
KB2500SGD	Super Bright Green GaP	568	green diffused	7	40	


KB2350EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	50	19.05mm x 3.81mm Size of Light Emitting Areas
KB-B100SRW	Super Bright Red GaAIAs	640	white diffused	50	200	
KB2450YW	Yellow GaAsP/GaP	588	white diffused	10	50	
KB2550SGD	Super Bright Green GaP	568	green diffused	18	70	

KB2655EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	60	8.89mm x 8.89mm Size of Light Emitting Areas
KB-C100SRW	Super Bright Red GaAIAs	640	white diffused	50	200	
KB2755YW	Yellow GaAsP/GaP	588	white diffused	10	50	
KB2855SGD	Super Bright Green GaP	568	green diffused	18	80	

KB2600EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	50	8.89mm x 3.81mm Size of Light Emitting Areas
KB-D100SRW	Super Bright Red GaAIAs	640	white diffused	36	100	
KB2700YW	Yellow GaAsP/GaP	588	white diffused	7	40	
KB2800SGD	Super Bright Green GaP	568	green diffused	10	50	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

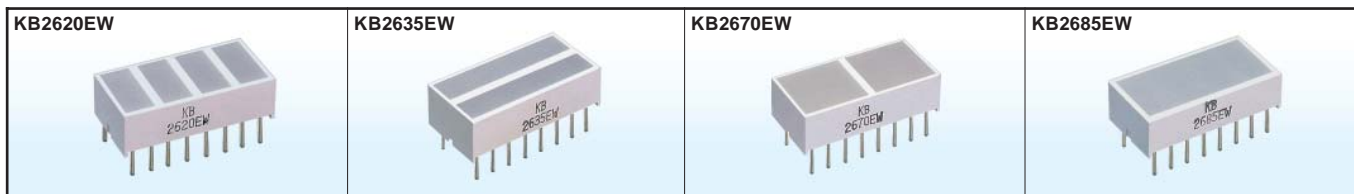

Part No.	Emitting Color + Material	λ D (nm)	Lens Type	Iv (mcd) @ 20mA		Dimension
				Min.	Typ.	

KB2620EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	50	<p>8.89mm x 3.81mm Size of Light Emitting Areas</p>
KB-E100SRW	Super Bright Red GaAlAs	640	white diffused	18	90	
KB2720YW	Yellow GaAsP/GaP	588	white diffused	7	40	
KB2820SGD	Super Bright Green GaP	568	green diffused	7	40	


KB2635EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	60	<p>3.81mm x 19.05mm Size of Light Emitting Areas</p>
KB-F100SRW	Super Bright Red GaAlAs	640	white diffused	50	200	
KB2735YW	Yellow GaAsP/GaP	588	white diffused	7	40	
KB2835SGD	Super Bright Green GaP	568	green diffused	36	100	

KB2670EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	50	<p>8.89mm x 8.89mm Size of Light Emitting Areas</p>
KB-G100SRW	Super Bright Red GaAlAs	640	white diffused	50	200	
KB2770YW	Yellow GaAsP/GaP	588	white diffused	10	50	
KB2870SGD	Super Bright Green GaP	568	green diffused	18	70	

KB2685EW	Hi.Eff.Red GaAsP/GaP	625	white diffused	10	60	<p>8.89mm x 19.05mm Size of Light Emitting Areas</p>
KB-H100SRW	Super Bright Red GaAlAs	640	white diffused	50	200	
KB2785YW	Yellow GaAsP/GaP	588	white diffused	10	50	
KB2885SGD	Super Bright Green GaP	568	green diffused	50	200	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

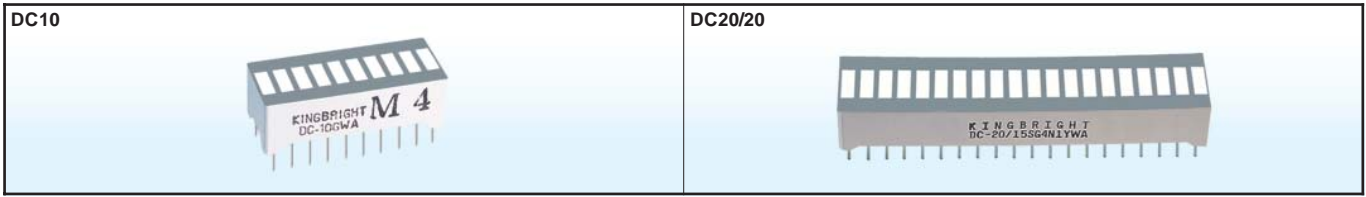


Part No.	Emitting Color + λ D (nm) + Material	Iv (ucd) @10mA		Description	Dimension
		Min.	Typ.		

DC10EWA	Hi.Eff.Red 625 GaAsP/GaP	1900	9000	10 Segments Bargraph-Display Gray Face White Segment	
DC10SRWA	Super Bright Red 640 GaAlAs	8000	31000		
DC10YWA	Yellow 588 GaAsP/GaP	1900	9000		
DC10GWA	Green 568 GaP	1900	9500		
DC7G3HWA	Green 568 GaP	1900	9500	10 Segments Bargraph-Display 7 x Green, 3 x Red Gray Face White Segment	
	Bright Red 660 GaP	480	2200		

DC20/20EWA	Hi.Eff.Red 625 GaAsP/GaP	1900	9000	20 Segments Bargraph-Display Gray Face White Segment	
DC20/20SRWA	Super Bright Red 640 GaAlAs	8000	31000		
DC20/20YWA	Yellow 588 GaAsP/GaP	1900	9000		
DC20/20GWA	Green 568 GaP	1900	9000		

NOTES:


1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

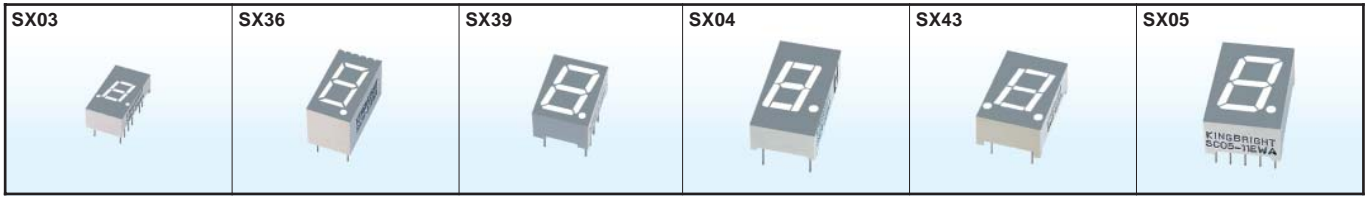

Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	
SA03-11EWA	SC03-12EWA	0.3 inch (7.62mm) Gray Face White Segment	GaAsP/GaP	625	1200	6400	11
SA03-11SRWA	SC03-12SRWA		GaAlAs	640	8000	26000	
SA03-11YWA	SC03-12YWA		GaAsP/GaP	588	800	3000	
SA03-11GWA	SC03-12GWA		GaP	568	1900	8000	
SA36-11EWA	SC36-11EWA	0.36 inch (9.14mm) Gray Face White Segment	GaAsP/GaP	625	480	1900	12
SA36-11SRWA	SC36-11SRWA		GaAlAs	640	1200	6400	
SA36-11YWA	SC36-11YWA		GaAsP/GaP	588	300	1200	
SA36-11GWA	SC36-11GWA		GaP	568	480	1900	
SA39-11EWA SA39-12EWA	SC39-11EWA SC39-12EWA	0.39 inch (9.9mm) Gray Face White Segment	GaAsP/GaP	625	800	4100	13
SA39-11SRWA SA39-12SRWA	SC39-11SRWA SC39-12SRWA		GaAlAs	640	3000	16000	
SA39-11YWA SA39-12YWA	SC39-11YWA SC39-12YWA		GaAsP/GaP	588	800	3000	
SA39-11GWA SA39-12GWA	SC39-11GWA SC39-12GWA		GaP	568	1200	6400	
SA04-11EWA SA04-12EWA	SC04-11EWA SC04-12EWA	0.4 inch (10.16mm) Gray Face White Segment	GaAsP/GaP	625	1900	8000	14
SA04-11SRWA SA04-12SRWA	SC04-11SRWA SC04-12SRWA		GaAlAs	640	4700	18000	
SA04-11YWA SA04-12YWA	SC04-11YWA SC04-12YWA		GaAsP/GaP	588	1200	4700	
SA04-11GWA SA04-12GWA	SC04-11GWA SC04-12GWA		GaP	568	3000	12000	
SA43-11EWA SA43-13EWA	SC43-11EWA SC43-13EWA	0.43 inch (10.92mm) Gray Face White Segment	GaAsP/GaP	625	1200	4700	15
SA43-11SRWA SA43-13SRWA	SC43-11SRWA SC43-13SRWA		GaAlAs	640	4700	18000	
SA43-11GWA SA43-13GWA	SC43-11GWA SC43-13GWA		GaP	568	1200	6400	
SA05-11EWA	SC05-11EWA	0.5 inch (12.7mm) Gray Face White Segment	GaAsP/GaP	625	1900	8000	16
SA05-11SRWA	SC05-11SRWA		GaAlAs	640	4700	24000	
SA05-11YWA	SC05-11YWA		GaAsP/GaP	588	1200	4700	
SA05-11GWA	SC05-11GWA		GaP	568	1900	10500	

NOTES:


1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

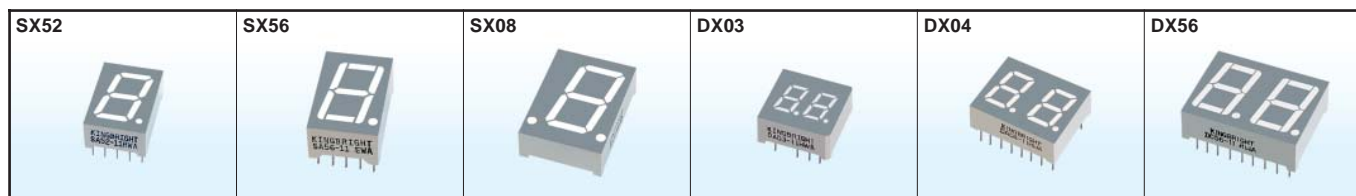

Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	
SA52-11EWA	SC52-11EWA	0.52 inch (13.2mm) Gray Face White Segment	GaAsP/GaP	625	1200	6400	17
SA52-11SRWA	SC52-11SRWA		GaAlAs	640	4700	24000	
SA52-11GWA	SC52-11GWA		GaP	568	1900	10500	
SA56-11EWA SA56-21EWA	SC56-11EWA SC56-21EWA	0.56 inch (14.2mm) Gray Face White Segment	GaAsP/GaP	625	1200	6400	18
SA56-11SRWA SA56-21SRWA	SC56-11SRWA SC56-21SRWA		GaAlAs	640	4700	24000	
SA56-11YWA SA56-21YWA	SC56-11YWA SC56-21YWA		GaAsP/GaP	588	1200	4700	
SA56-11GWA SA56-21GWA	SC56-11GWA SC56-21GWA		GaP	568	1900	10500	
SA56-11PBWA	SC56-11PBWA		InGaN	470	1900	10371	
SA08-11EWA SA08-12EWA SA08-21EWA	SC08-11EWA SC08-12EWA SC08-21EWA	0.8 inch (20.32mm) Gray Face White Segment	GaAsP/GaP	625	1200	6400	19
SA08-11SRWA SA08-12SRWA SA08-21SRWA	SC08-11SRWA SC08-12SRWA SC08-21SRWA		GaAlAs	640	4700	24000	
SA08-11YWA SA08-12YWA SA08-21YWA	SC08-11YWA SC08-12YWA SC08-21YWA		GaAsP/GaP	588	1200	4700	
SA08-11GWA SA08-12GWA SA08-21GWA	SC08-11GWA SC08-12GWA SC08-21GWA		GaP	568	1900	10500	
DA03-11EWA	DC03-11EWA	0.3 inch (7.62mm) Gray Face White Segment	GaAsP/GaP	625	480	1900	20
DA03-11SRWA	DC03-11SRWA		GaAlAs	640	1900	8000	
DA03-11YWA	DC03-11YWA		GaAsP/GaP	588	300	1200	
DA03-11GWA	DC03-11GWA		GaP	568	800	3000	
DA04-11EWA	DC04-11EWA	0.394 inch (10mm) Gray Face White Segment	GaAsP/GaP	625	1200	4700	21
DA04-11SRWA	DC04-11SRWA		GaAlAs	640	4700	18000	
DA04-11YWA	DC04-11YWA		GaAsP/GaP	588	800	3000	
DA04-11GWA	DC04-11GWA		GaP	568	1900	8000	
DA56-11EWA	DC56-11EWA	0.56 inch (14.22mm) Gray Face White Segment	GaAsP/GaP	625	1900	8000	22
DA56-11SRWA	DC56-11SRWA		GaAlAs	640	4700	24000	
DA56-11YWA	DC56-11YWA		GaAsP/GaP	588	1200	4700	
DA56-11GWA	DC56-11GWA		GaP	568	1900	10500	
DA56-11PBWA	DC56-11PBWA		InGaN	470	8000	18000	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

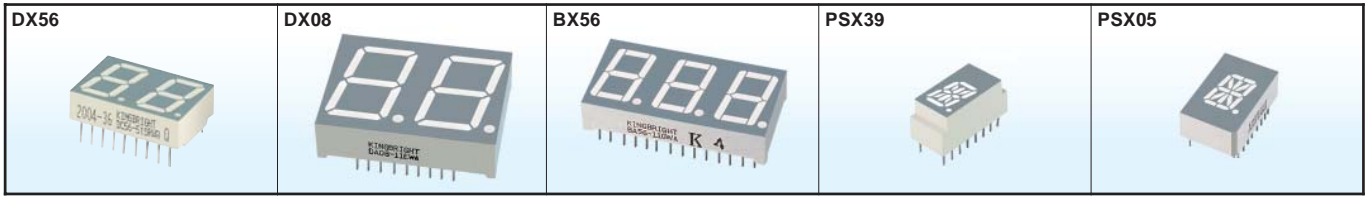

Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	
DA56-51EWA	DC56-51EWA	0.56 inch (14.22mm) Gray Face White Segment	GaAsP/GaP	625	3000	12000	23
DA56-51YWA	DC56-51YWA		GaAsP/GaP	588	1200	5300	
DA56-51GWA	DC56-51GWA		GaP	568	3000	14400	
DA08-11EWA	DC08-11EWA	0.8 inch (20.32mm) Gray Face White Segment	GaAsP/GaP	625	1900	8000	24
DA08-11SRWA	DC08-11SRWA		GaAlAs	640	4700	24000	
DA08-11YWA	DC08-11YWA		GaAsP/GaP	588	1200	4700	
DA08-11GWA	DC08-11GWA		GaP	568	1900	10500	
BA56-11EWA BA56-12EWA BA56-13EWA	BC56-11EWA BC56-12EWA BC56-13EWA	0.56 inch (14.22mm) Gray Face White Segment	GaAsP/GaP	625	1200	6400	25
BA56-11SRWA BA56-12SRWA BA56-13SRWA	BC56-11SRWA BC56-12SRWA BC56-13SRWA		GaAlAs	640	4700	24000	
BA56-11YWA BA56-12YWA BA56-13YWA	BC56-11YWA BC56-12YWA BC56-13YWA		GaAsP/GaP	588	1200	4700	
BA56-11GWA BA56-12GWA BA56-13GWA	BC56-11GWA BC56-12GWA BC56-13GWA		GaP	568	1900	10500	
PSA39-21EWA	PSC39-21EWA	0.39 inch (9.9mm) Gray Face White Segment	GaAsP/GaP	625	1200	3188	26
PSA39-21SRWA	PSC39-21SRWA		GaAlAs	640	3000	13250	
PSA39-21YWA	PSC39-21YWA		GaAsP/GaP	588	480	1278	
PSA39-21GWA	PSC39-21GWA		GaP	568	1200	2679	
PSA05-11EWA PSA05-12EWA	PSC05-11EWA PSC05-12EWA	0.5 inch (12.7mm) Gray Face White Segment	GaAsP/GaP	625	800	4100	27
PSA05-11SRWA PSA05-12SRWA	PSC05-11SRWA PSC05-12SRWA		GaAlAs	640	4700	18000	
PSA05-11YWA PSA05-12YWA	PSC05-11YWA PSC05-12YWA		GaAsP/GaP	588	800	3000	
PSA05-11GWA PSA05-12GWA	PSC05-11GWA PSC05-12GWA		GaP	568	1200	4700	

NOTES:


1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.



Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	
PSA08-11EWA PSA08-12EWA	PSC08-11EWA PSC08-12EWA	0.8 inch (20.32mm) Gray Face White Segment	GaAsP/GaP	625	1200	4700	28
PSA08-11SRWA PSA08-12SRWA	PSC08-11SRWA PSC08-12SRWA		GaAlAs	640	4700	18000	
PSA08-11YWA PSA08-12YWA	PSC08-11YWA PSC08-12YWA		GaAsP/GaP	588	800	3000	
PSA08-11GWA PSA08-12GWA	PSC08-11GWA PSC08-12GWA		GaP	568	1200	4700	
PSA12-11EWA	PSC12-11EWA	1.2 inch (30.48mm) Gray Face White Segment	GaAsP/GaP	625	3000	12000	29
PSA12-11SRWA	PSC12-11SRWA		GaAlAs	640	8000	26000	
PSA12-11YWA	PSC12-11YWA		GaAsP/GaP	588	1200	4700	
PSA12-11GWA	PSC12-11GWA		GaP	568	3000	12000	
PSA23-11EWA	PSC23-11EWA	2.24 inch (56.8mm) Gray Face White Segment	GaAsP/GaP	625	1900	8000	30
PSA23-11SRWA	PSC23-11SRWA		GaAlAs	640	12000	75000	
PSA23-11YWA	PSC23-11YWA		GaAsP/GaP	588	1900	8000	
PSA23-11GWA	PSC23-11GWA		GaP	568	1900	10500	
PDA54-11EWA PDA54-12EWA	PDC54-11EWA PDC54-12EWA	0.543 inch (13.8mm) Gray Face White Segment	GaAsP/GaP	625	1200	4700	31
PDA54-11SRWA PDA54-12SRWA	PDC54-11SRWA PDC54-12SRWA		GaAlAs	640	4700	18000	
PDA54-11YWA PDA54-12YWA	PDC54-11YWA PDC54-12YWA		GaAsP/GaP	588	800	3000	
PDA54-11GWA PDA54-12GWA	PDC54-11GWA PDC54-12GWA		GaP	568	1900	8000	
TA07-11EWA	TC07-11EWA	0.7 inch (18mm) 5x7 Gray Face White Dot	GaAsP/GaP	625	1900	8000	32
TA07-11SRWA	TC07-11SRWA		GaAlAs	640	4700	24000	
TA07-11YWA	TC07-11YWA		GaAsP/GaP	588	1200	4700	
TA07-11GWA	TC07-11GWA		GaP	568	1900	8000	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

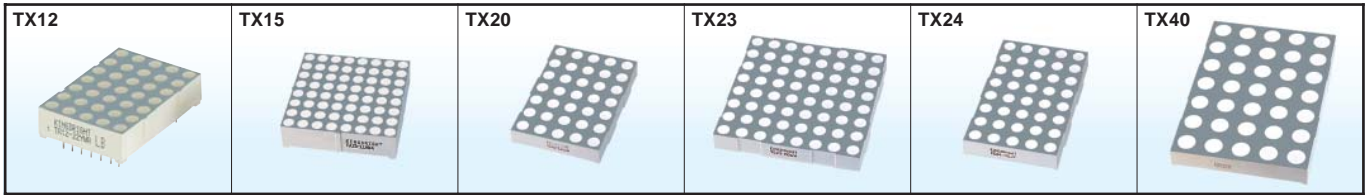






Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Column Anode	Column Cathode				Min.	Typ.	
TA12-11EWA	TC12-11EWA	1.2 inch (30mm) 5x7 Gray Face White Dot	GaAsP/GaP	625	1900	8000	33
TA12-11SRWA	TC12-11SRWA		GaAlAs	640	4700	24000	
TA12-11YWA	TC12-11YWA		GaAsP/GaP	588	1200	4700	
TA12-11GWA	TC12-11GWA		GaP	568	1900	10500	
TA15-11EWA	TC15-11EWA	1.5 inch (38mm) 8x8 Gray Face White Dot	GaAsP/GaP	625	1900	10500	34
TA15-11SRWA	TC15-11SRWA		GaAlAs	640	8000	26000	
TA15-11YWA	TC15-11YWA		GaAsP/GaP	588	1900	8000	
TA15-11GWA	TC15-11GWA		GaP	568	3000	16000	
TBA15-11EGWA	TBC15-11EGWA		GaAsP/GaP	625	1900	10500	
			GaP	568	3000	16000	
TA20-11EWA	TC20-11EWA	2.0 inch (50mm) 5x7 Gray Face White Dot	GaAsP/GaP	625	3000	12000	35
TA20-11SRWA	TC20-11SRWA		GaAlAs	640	8000	26000	
TA20-11GWA	TC20-11GWA		GaP	568	3000	16000	
TA23-11EWA	TC23-11EWA	2.3 inch (58mm) 8x8 Gray Face White Dot	GaAsP/GaP	625	1900	8000	36
TA23-11SRWA	TC23-11SRWA		GaAlAs	640	12000	44000	
TA23-11YWA	TC23-11YWA		GaAsP/GaP	588	1900	8000	
TA23-11GWA	TC23-11GWA		GaP	568	1900	10500	
TBA23-11EGWA	TBC23-11EGWA		GaAsP/GaP	625	1900	8000	
			GaP	568	1900	10500	
TBA23-12EGWA	TBC23-12EGWA		GaAsP/GaP	625	1900	8000	
			GaP	568	1900	10500	
TA24-11EWA	TC24-11EWA	2.4 inch (60.8mm) 5x8 Gray Face White Dot	GaAsP/GaP	625	1900	8000	37
TA24-11SRWA	TC24-11SRWA		GaAlAs	640	8000	26000	
TA24-11YWA	TC24-11YWA		GaAsP/GaP	588	1900	8000	
TA24-11GWA	TC24-11GWA		GaP	568	3000	12000	
TBA24-11EGWA	TBC24-11EGWA		GaAsP/GaP	625	1900	8000	
			GaP	568	3000	12000	
TBA24-22EGWA	TBC24-22EGWA		GaAsP/GaP	625	1900	8000	
			GaP	568	3000	12000	
TA40-11EWA	TC40-11EWA	4.0 inch (100mm) 5x7 Gray Face White Dot	GaAsP/GaP	625	3000	16000	38
TA40-11SRWA	TC40-11SRWA		GaAlAs	640	12000	44000	
TA40-11YWA	TC40-11YWA		GaAsP/GaP	588	1900	8000	
TA40-11GWA	TC40-11GWA		GaP	568	4700	24000	
TBA40-11EGWA	TBC40-11EGWA		GaAsP/GaP	625	3000	16000	
			GaP	568	8000	24000	
TBA40-12EGWA	TBC40-12EGWA		GaAsP/GaP	625	3000	16000	
			GaP	568	4700	24000	

NOTES:






1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

SA/SC03 Series








A: SA03-11
B: SC03-12

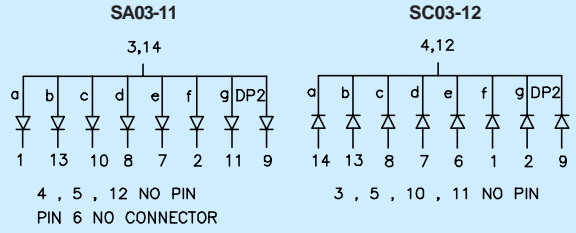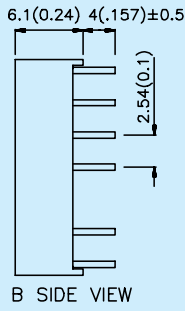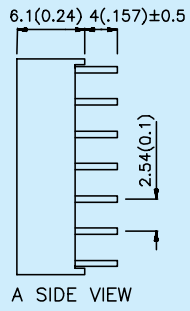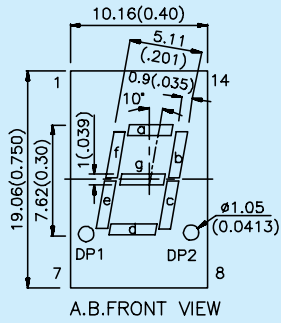

SA/SC36 Series



SA/SC39 Series

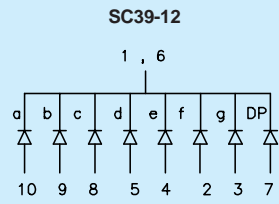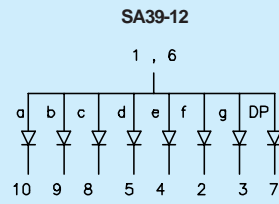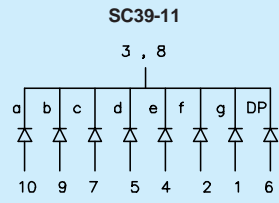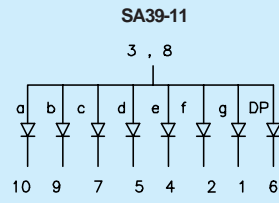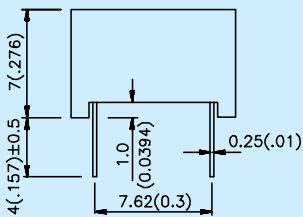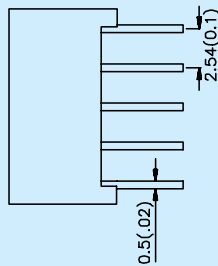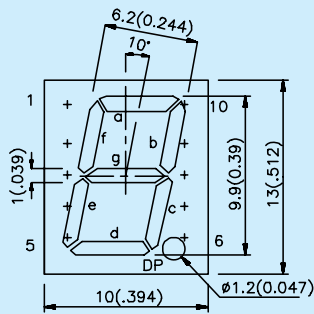


NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

SA/SC04 Series


14

- A: SA04-11
- B: SC04-11
- C: SA/SC04-12

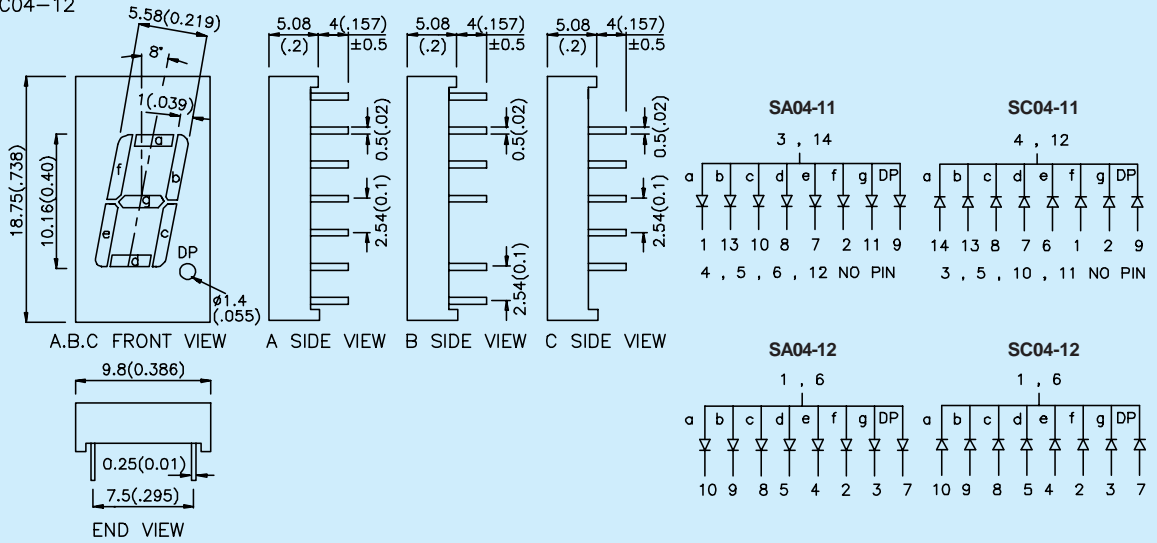


SA/SC43 Series

15

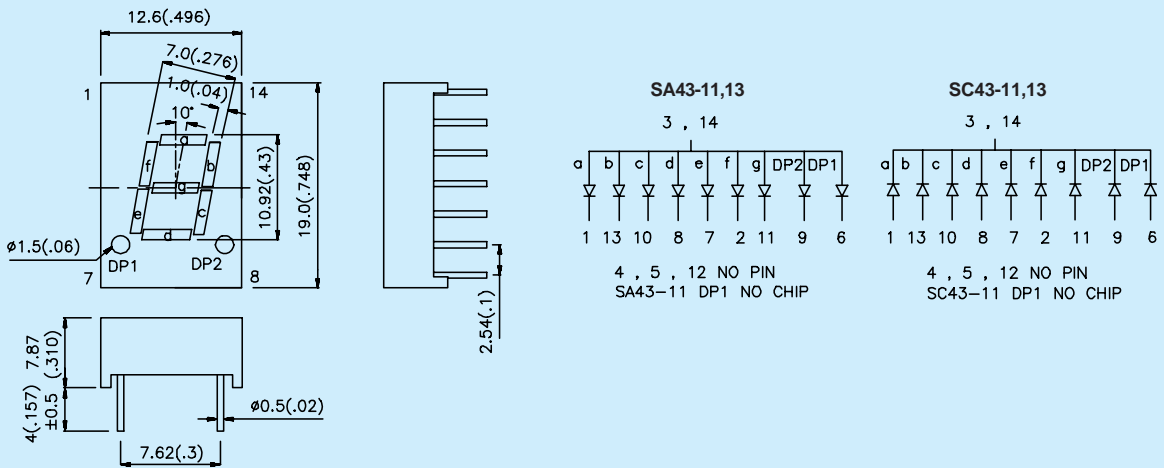

SA/SC05 Series


16

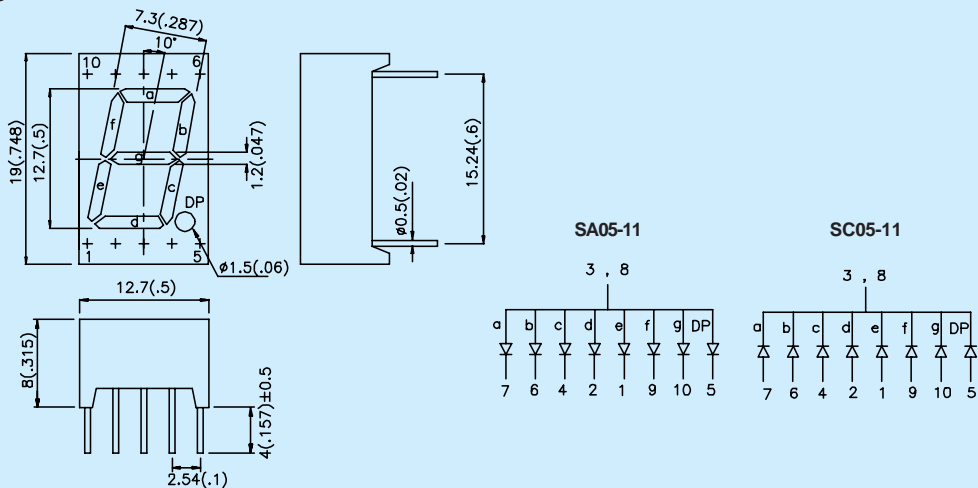

NOTES:
1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.


SA/SC52 Series

17

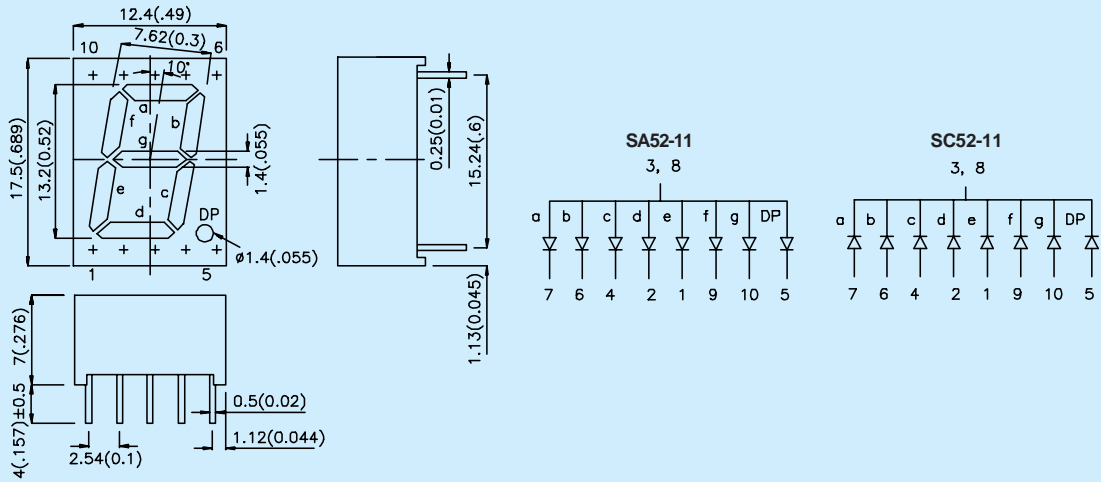


SA/SC56 Series

18

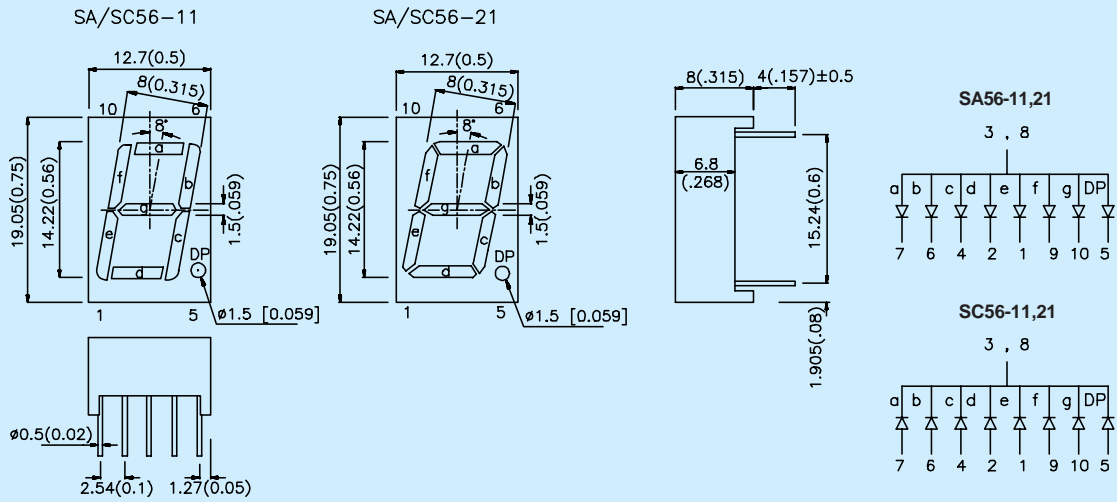

SA/SC08 Series



19

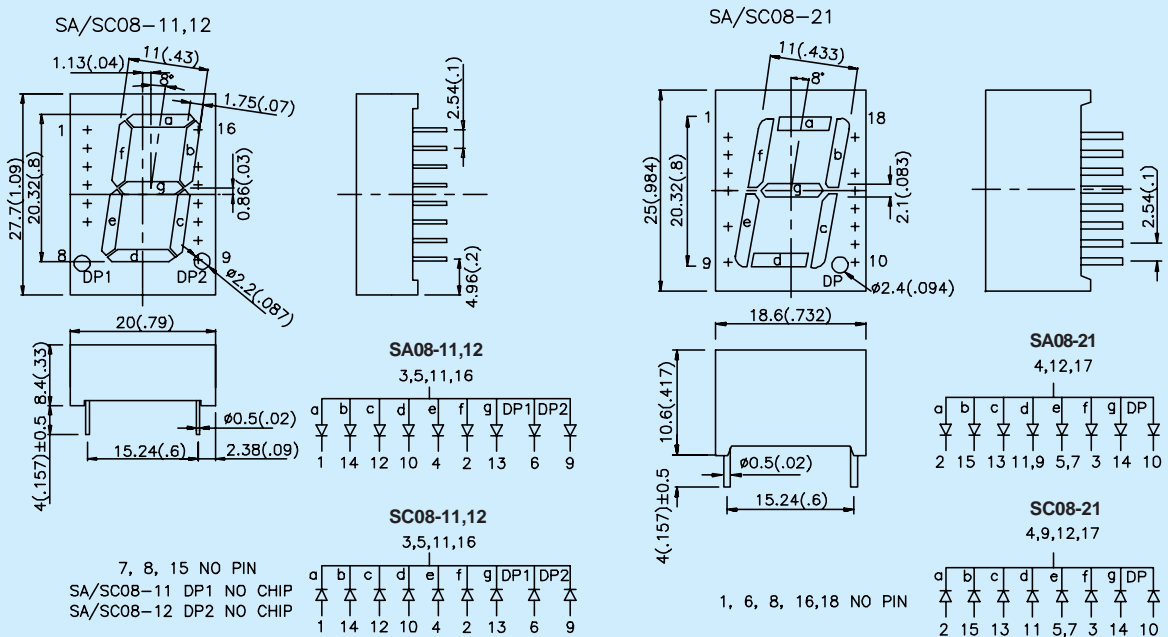


NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.

DA/DC03 Series


20

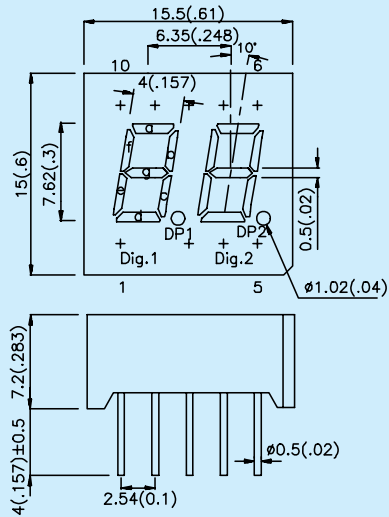

DA03-11


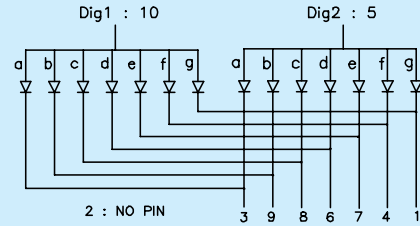


DC03-11

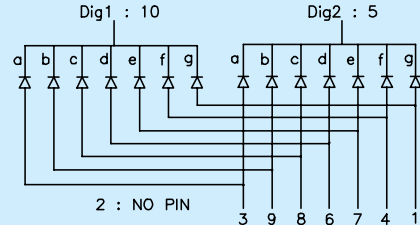


DA/DC04 Series


21

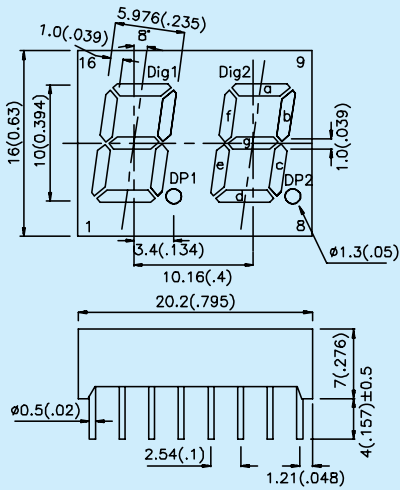

DA04-11

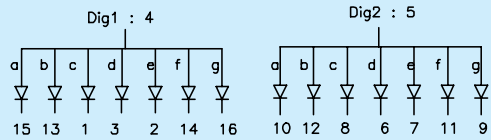


DC04-11

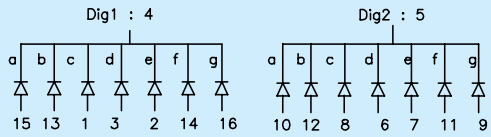


DA/DC56 Series


22

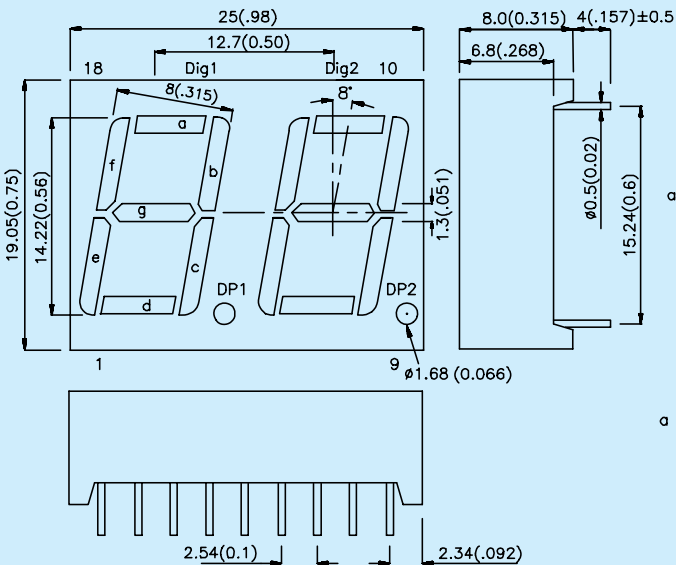

DA56-11

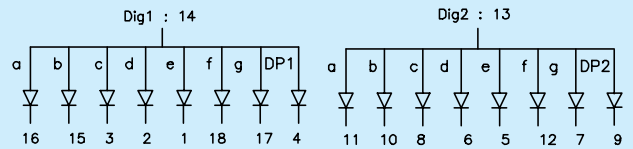


DC56-11

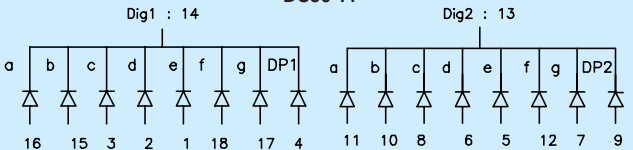


NOTES:



1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01\text{'})$ unless otherwise noted.

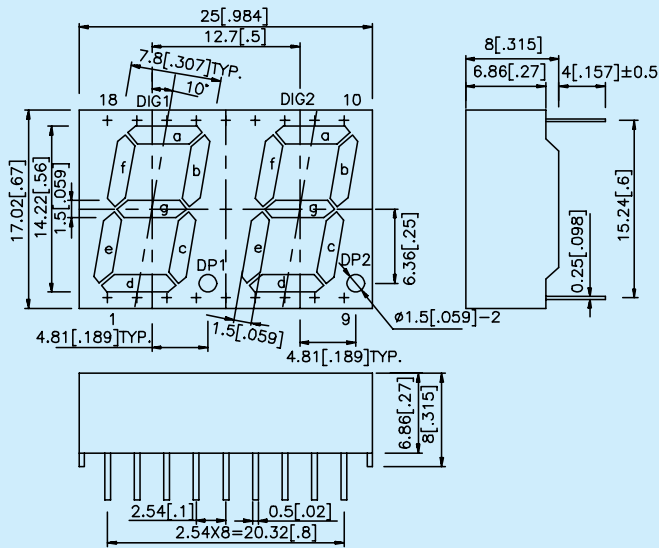


DA56-51

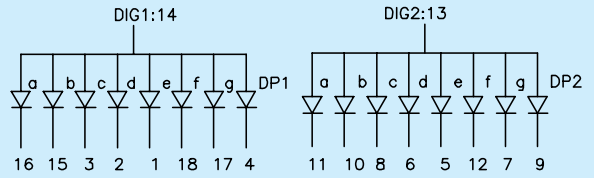


DC56-51

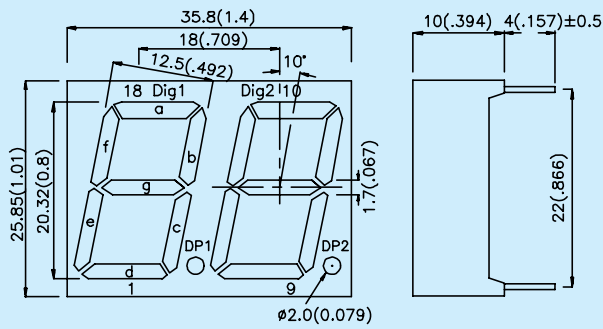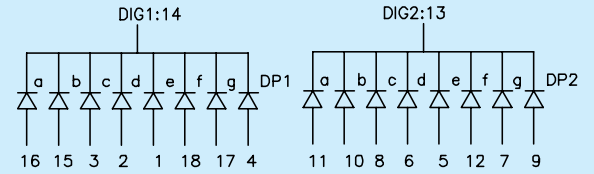

DA08-11

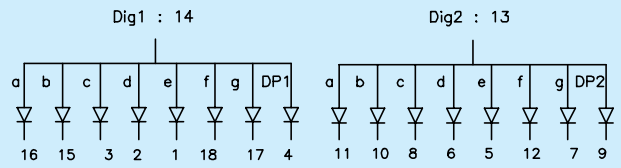



DC08-11

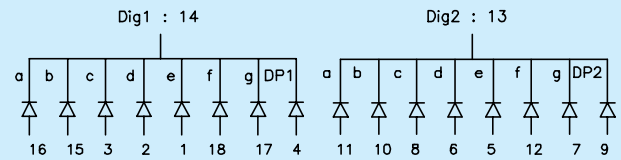



NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01")$ unless otherwise noted.

BA/BC56-11
BA/BC56-13

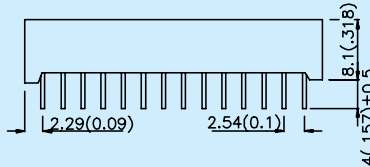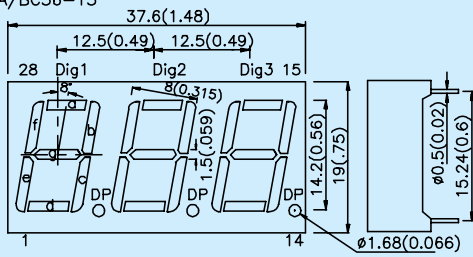


BA/BC56-12

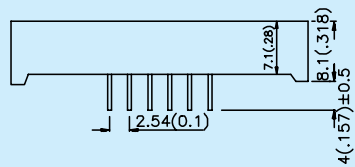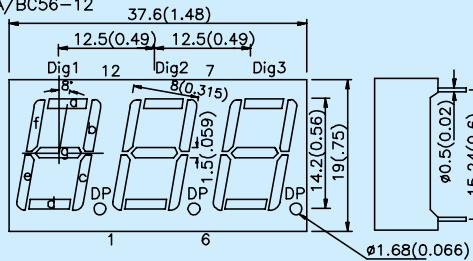


BA56-11

Dig1: 3,26
Dig2: 19
Dig3: 18

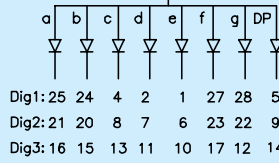


BC56-11

Dig1: 3,26
Dig2: 19
Dig3: 18

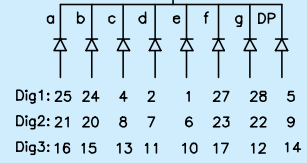


BA56-13

Dig1: 26
Dig2: 8,21
Dig3: 15

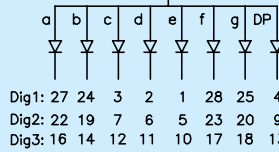


BC56-13

Dig1: 26
Dig2: 8,21
Dig3: 15

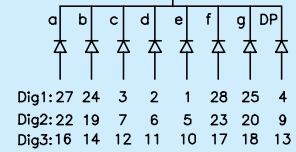



BA56-12

Dig1: 12
Dig2: 9
Dig3: 8

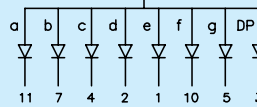


BC56-12


Dig1: 12
Dig2: 9
Dig3: 8

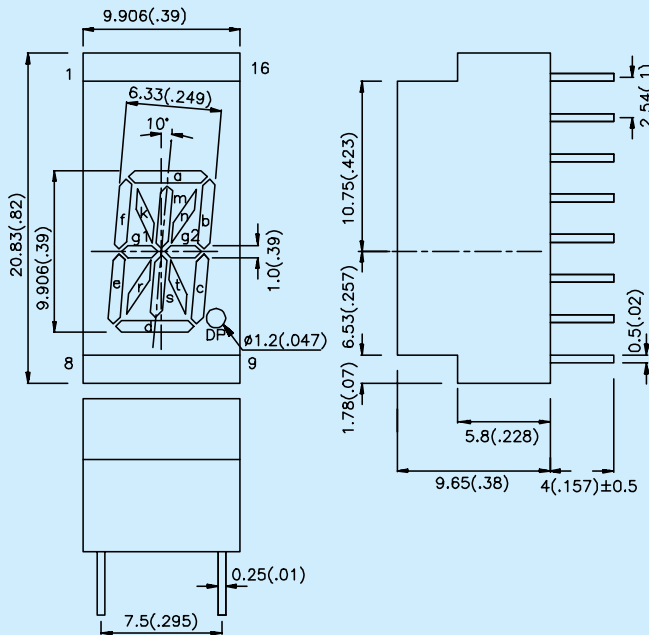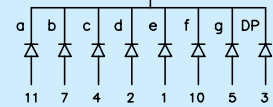

PSA39-21

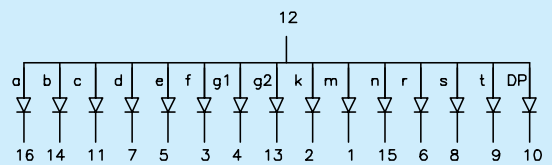

PSC39-21


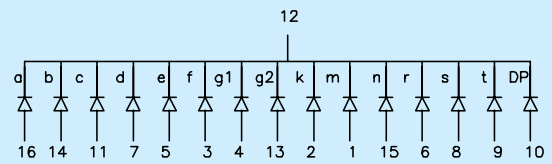


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.



PSA/PSC05 Series

27

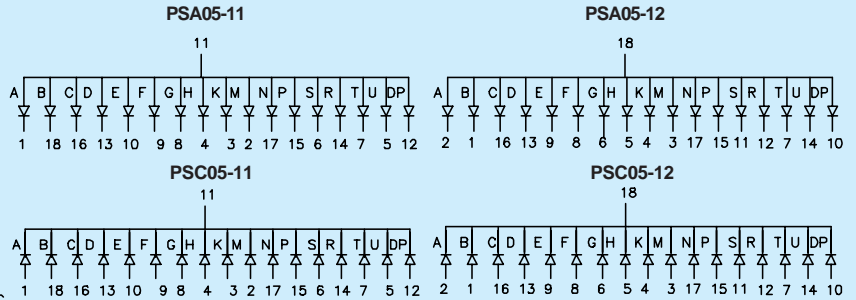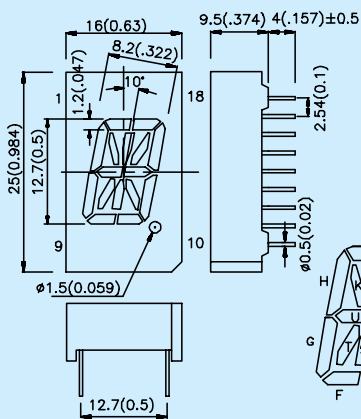



PSA/PSC08 Series

28

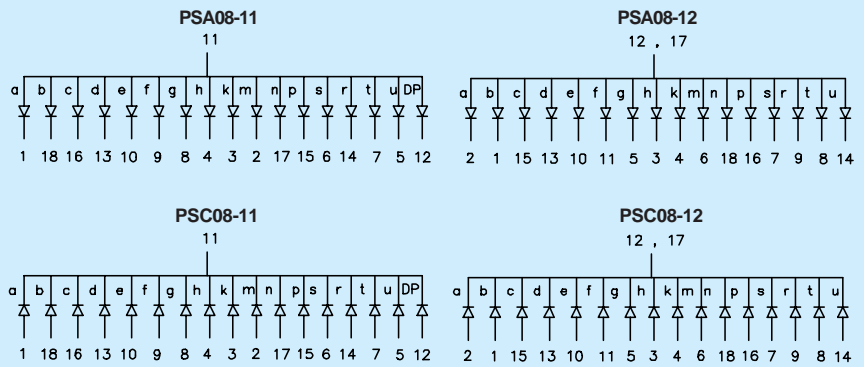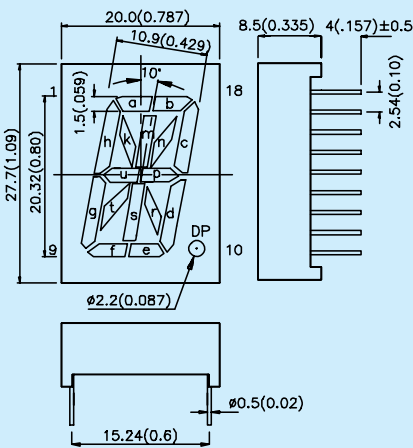

PSA/PSC12 Series




29

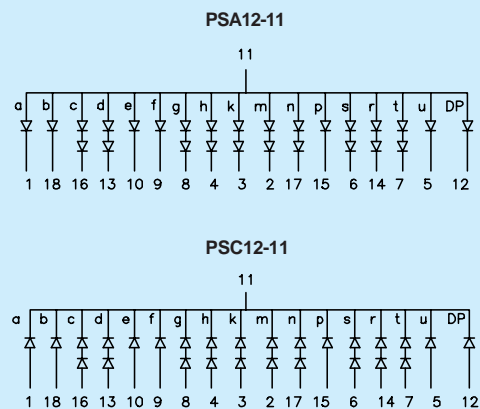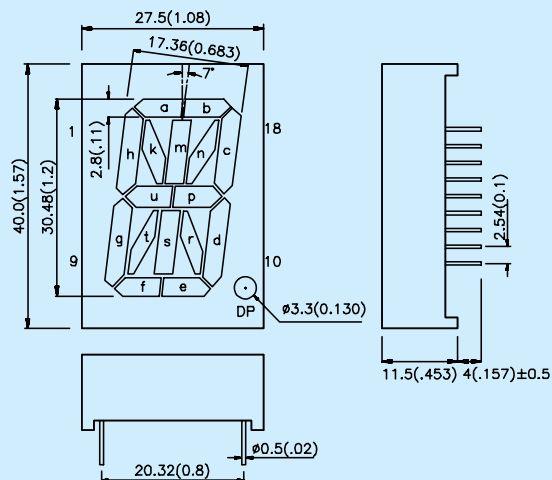

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.








PSA/PSC23 Series

30




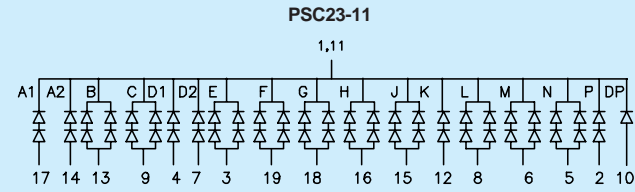
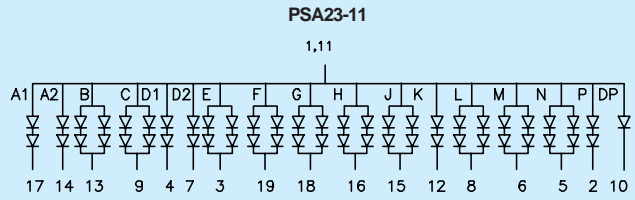
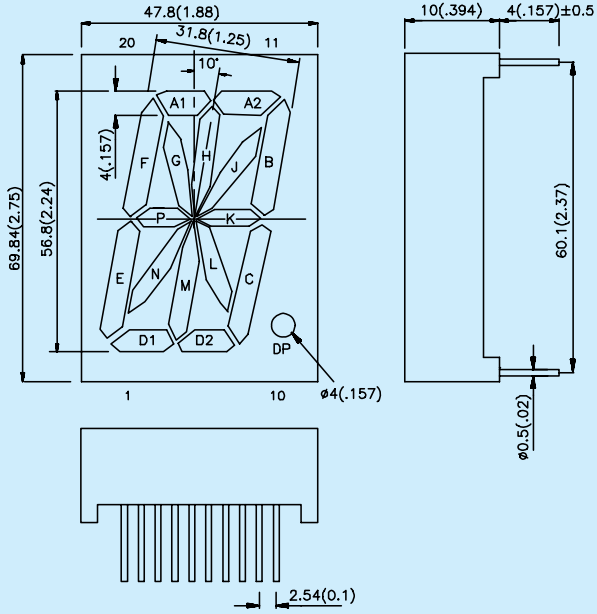


PDA/PDC54 Series

31

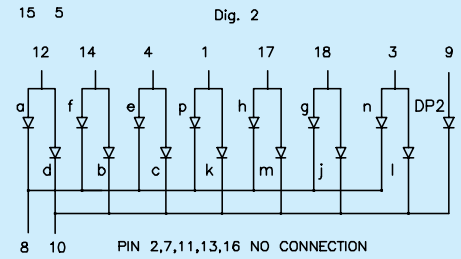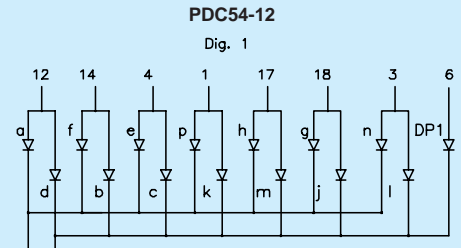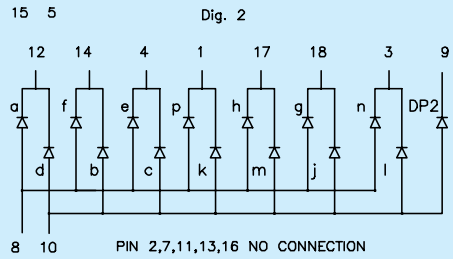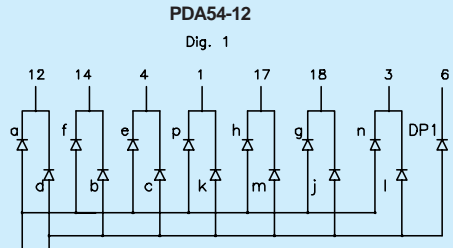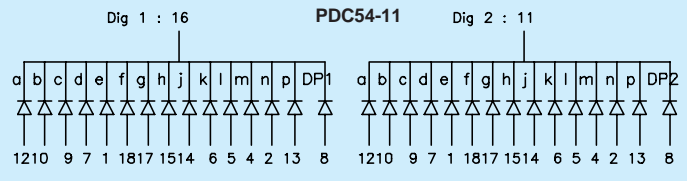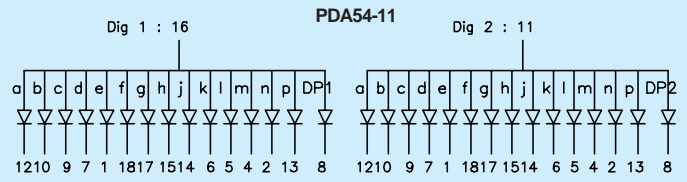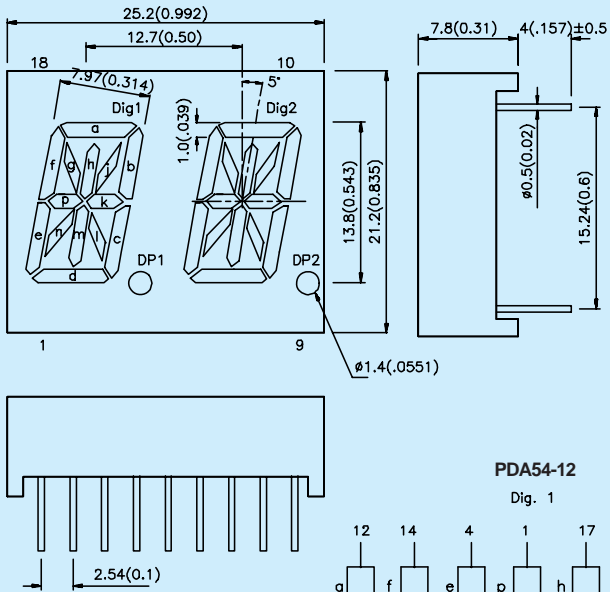


NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

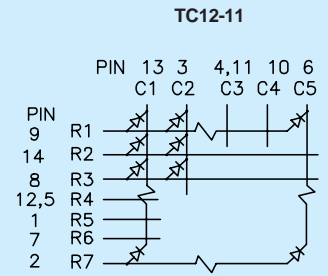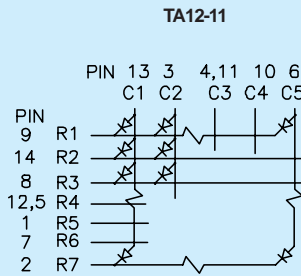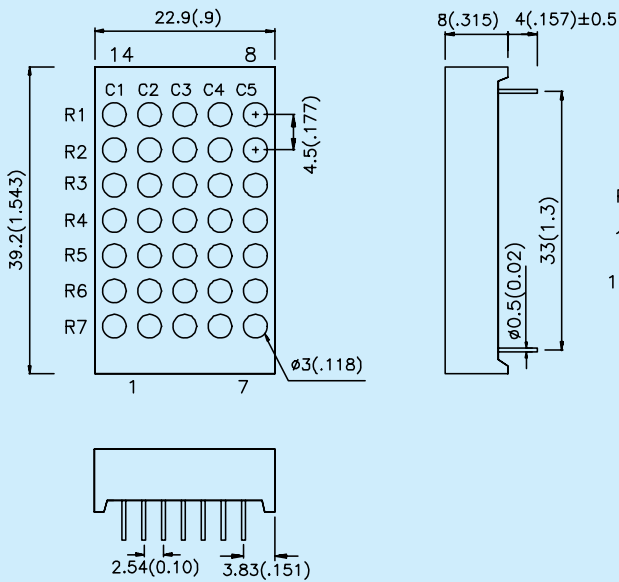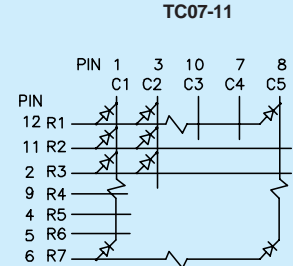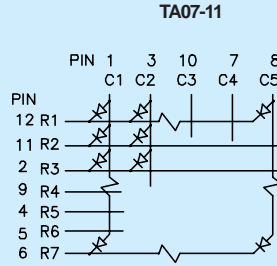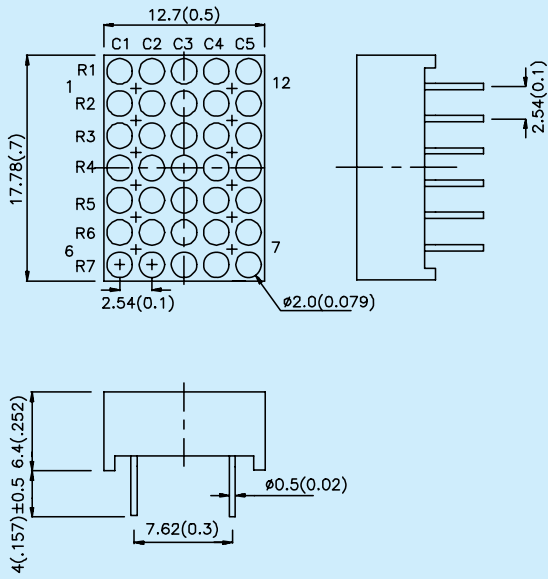


NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.


TA/TC15-11

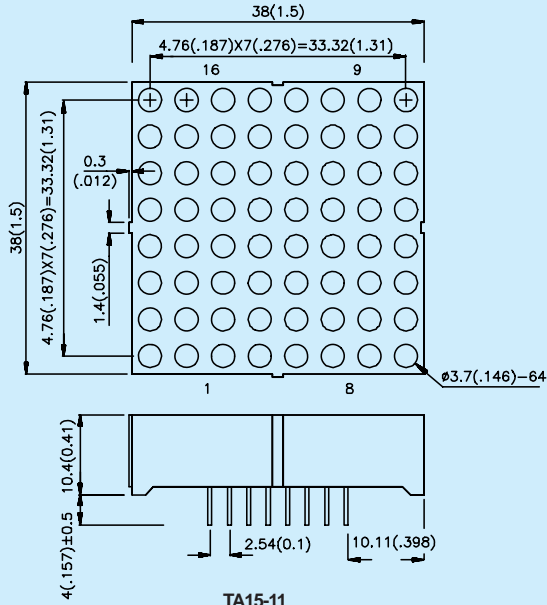


TA15-11

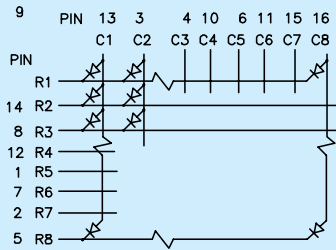


TC15-11

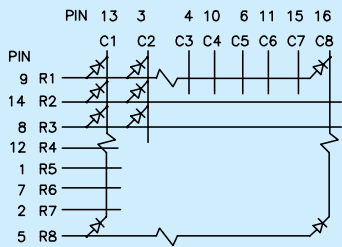


TBA/TBC15-11

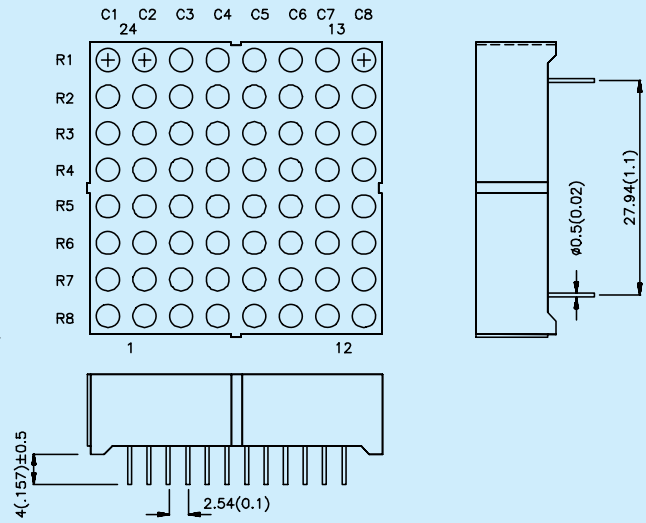


TBA15-11

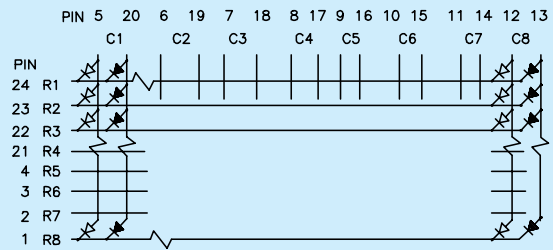


TBC15-11

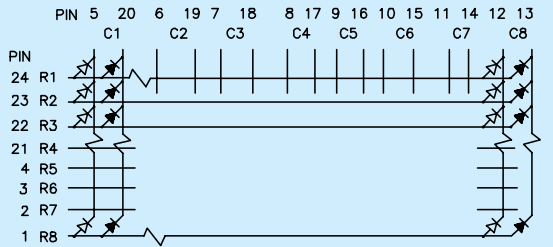


GREEN
RED

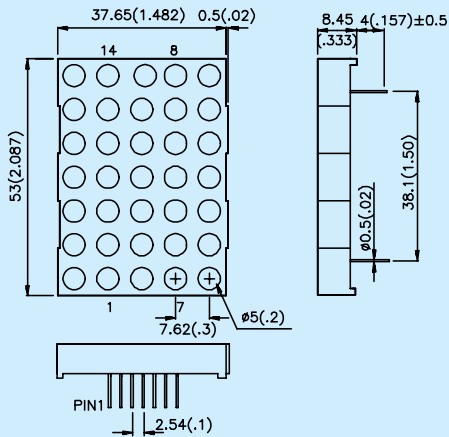








TA20-11

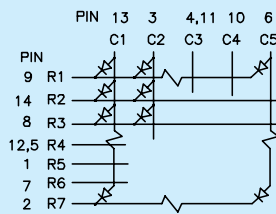

TC20-11

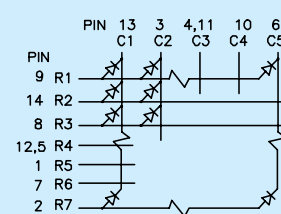


NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

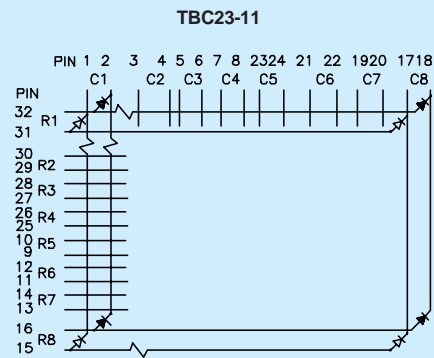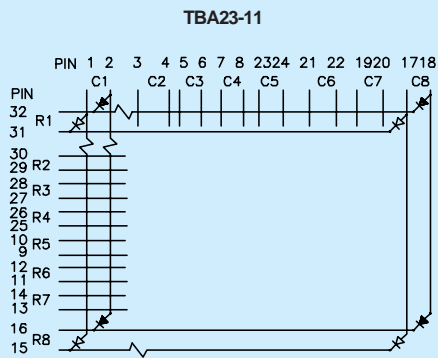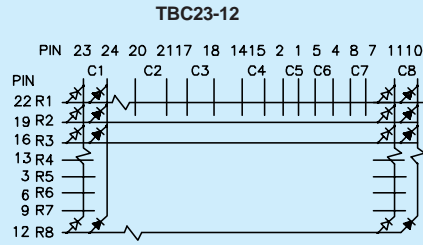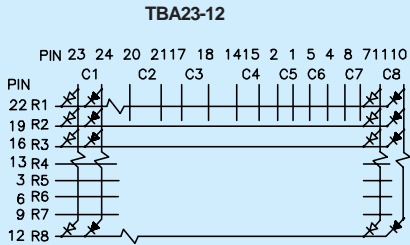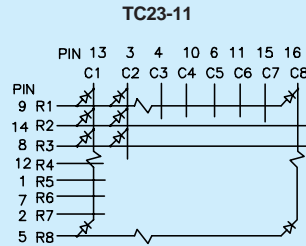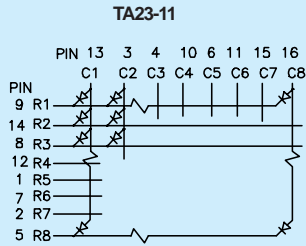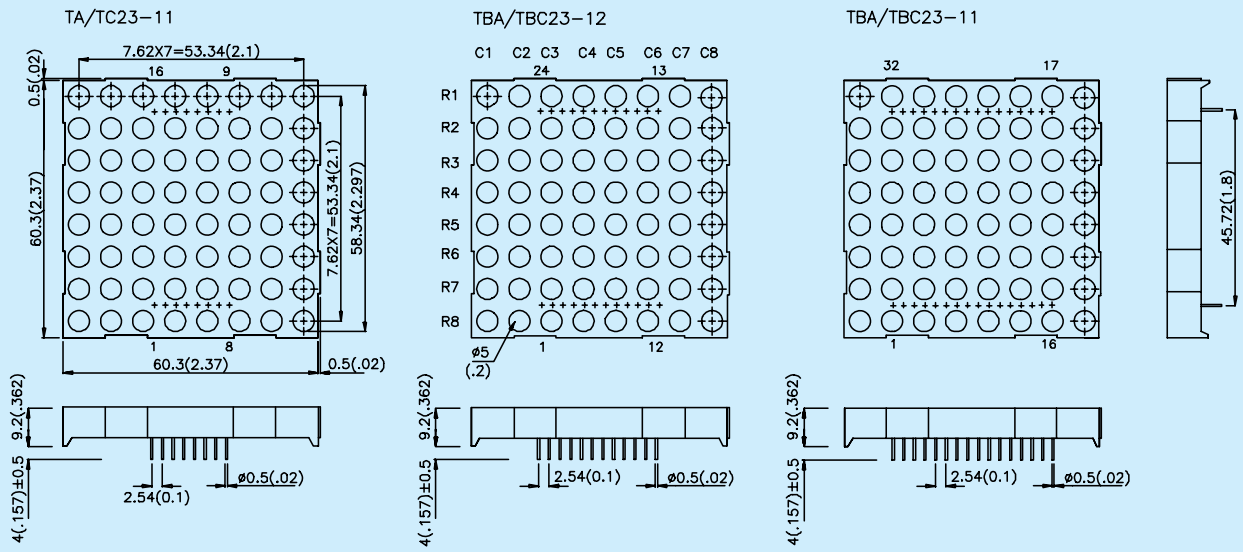


✕ GREEN
✕ RED


NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

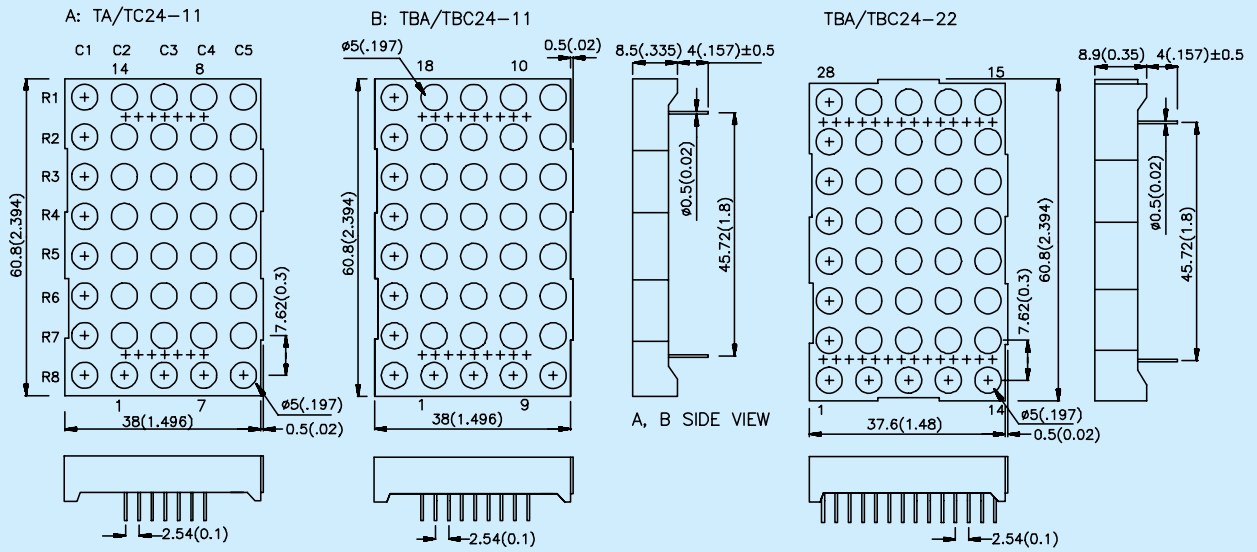


TA24-11

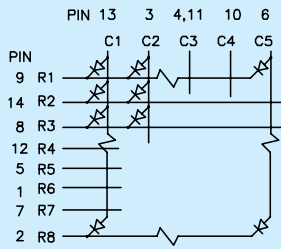


TBA24-11

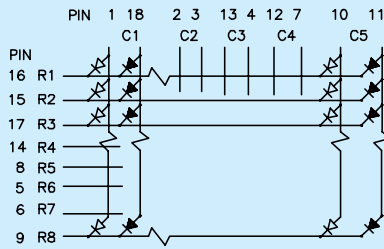


TBA24-22

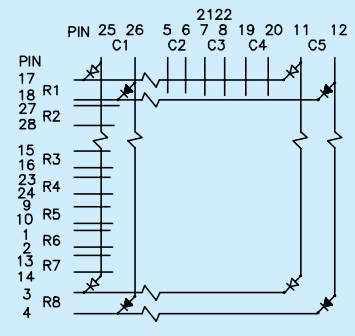


TC24-11

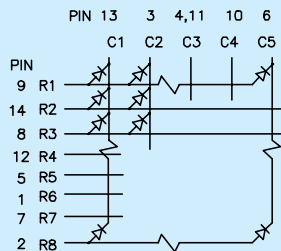








TBC24-11

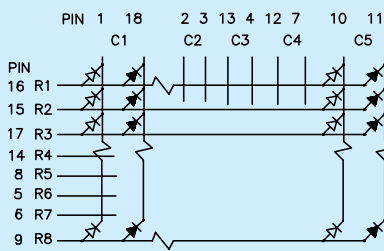

TBC24-22

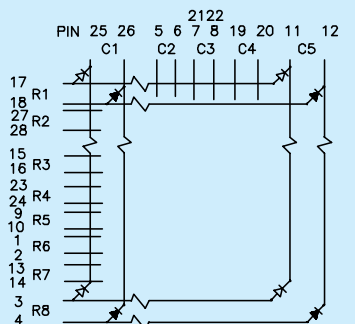

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is $\pm 0.25\text{mm}(0.01")$ unless otherwise noted.

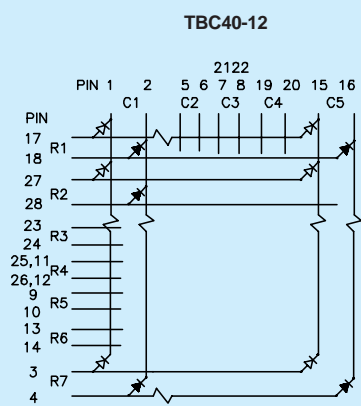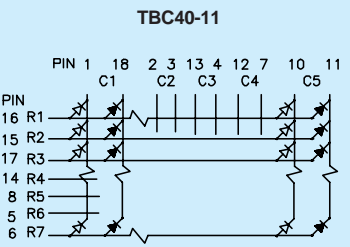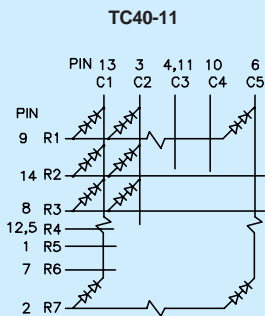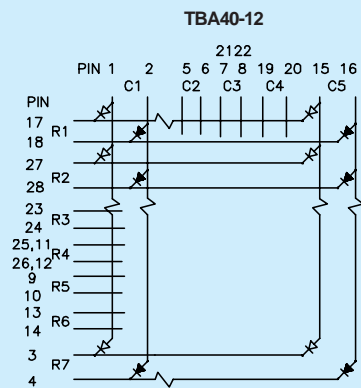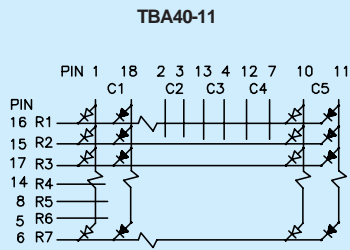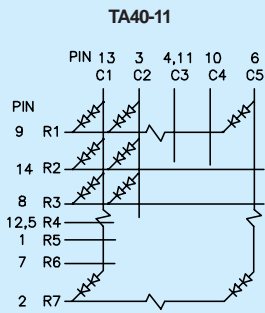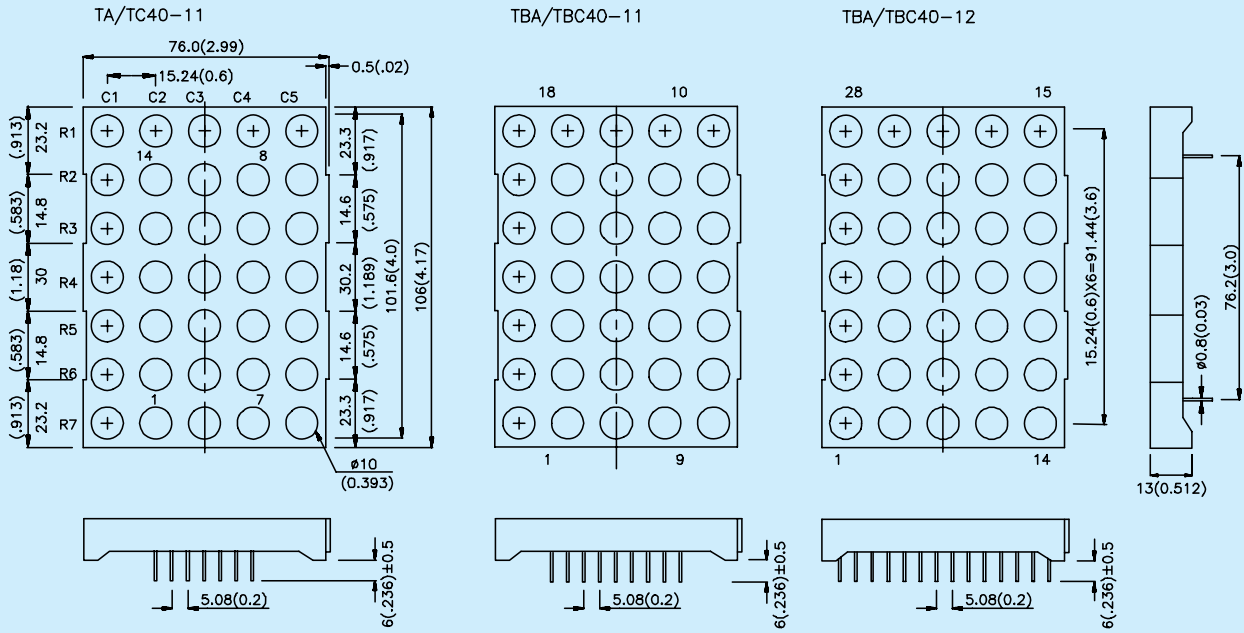

✱ FOR 2 RED CHIPS

✱ FOR 2 GREEN CHIPS

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA *V=5V		Viewing Angle 2θ/2	Dimension
				Min.	Typ.		

AM2520EH/ID	GaAsP/GaP	625	red diffused	7	30	40°	<p>Subminiature Solid State Lamps</p>
AM2520EH/ID5V	GaAsP/GaP	625	red diffused	*1.8	*8	40°	
AM2520EH/YD	GaAsP/GaP	588	yellow diffused	2.6	10	40°	
AM2520EH/YD5V	GaAsP/GaP	588	yellow diffused	*1.0	*3	40°	
AM2520EH/SGD	GaP	568	green diffused	2.6	10	40°	
AM2520EH/SGD5V	GaP	568	green diffused	*1.8	*10	40°	

AM2520EJ/ID	GaAsP/GaP	625	red diffused	7	30	40°	<p>Subminiature Solid State Lamps</p>
AM2520EJ/ID5V	GaAsP/GaP	625	red diffused	*1.8	*8	40°	
AM2520EJ/YD	GaAsP/GaP	588	yellow diffused	2.6	10	40°	
AM2520EJ/YD5V	GaAsP/GaP	588	yellow diffused	*1.0	*3	40°	
AM2520EJ/SGD	GaP	568	green diffused	2.6	10	40°	
AM2520EJ/SGD5V	GaP	568	green diffused	*1.8	*10	40°	

AM2520EF/4ID	GaAsP/GaP	625	red diffused	7	30	40°	<p>Subminiature Solid State Lamps</p>
AM2520EF/4ID5V	GaAsP/GaP	625	red diffused	*1.8	*8	40°	
AM2520EF/4YD	GaAsP/GaP	588	yellow diffused	2.6	10	40°	
AM2520EF/4YD5V	GaAsP/GaP	588	yellow diffused	*1.0	*3	40°	
AM2520EF/4SGD	GaP	568	green diffused	2.6	10	40°	
AM2520EF/4SGD5V	GaP	568	green diffused	*1.8	*10	40°	

AM2520EG/4ID	GaAsP/GaP	625	red diffused	7	30	40°	<p>Subminiature Solid State Lamps</p>
AM2520EG/4ID5V	GaAsP/GaP	625	red diffused	*1.8	*8	40°	
AM2520EG/4YD	GaAsP/GaP	588	yellow diffused	2.6	10	40°	
AM2520EG/4YD5V	GaAsP/GaP	588	yellow diffused	*1.0	*3	40°	
AM2520EG/4SGD	GaP	568	green diffused	2.6	10	40°	
AM2520EG/4SGD5V	GaP	568	green diffused	*1.8	*10	40°	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.
3. Parts with different 6V, 12V & 24V internal resistor are available. Please check with our sales offices worldwide.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP4060VH/2ID	GaAsP/GaP	625	red diffused	8	15	70°	<p>1.8mm Bi-Level</p>
WP4060VH/2SRD	GaAlAs	640	red diffused	*70	*200	70°	
WP4060VH/2YD	GaAsP/GaP	588	yellow diffused	1.8	5	70°	
WP4060VH/2GD	GaP	568	green diffused	5	10	70°	


WP4060XH/3ID	GaAsP/GaP	625	red diffused	8	15	70°	<p>1.8mm Tri-Level</p>
WP4060XH/3SRD	GaAlAs	640	red diffused	*70	*200	70°	
WP4060XH/3YD	GaAsP/GaP	588	yellow diffused	1.8	5	70°	
WP4060XH/3GD	GaP	568	green diffused	5	10	70°	

WP934CB/ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Right Angle</p>
WP934CB/SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934CB/YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934CB/GD	GaP	568	green diffused	8	20	40°	

WP934EW/ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Right Angle</p>
WP934EW/SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934EW/YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934EW/GD	GaP	568	green diffused	8	20	40°	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

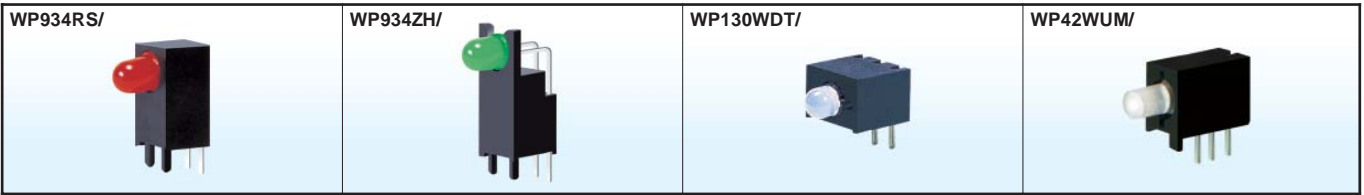

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


WP934RS/ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Right Angle</p>
WP934RS/SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934RS/YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934RS/GD	GaP	568	green diffused	8	20	40°	

WP934ZH/ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Right Angle</p>
WP934ZH/SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934ZH/YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934ZH/GD	GaP	568	green diffused	8	20	40°	

WP130WDT/EGW	GaAsP/GaP	625	white diffused	*7	*30	60°	<p>T-1 (3mm) Right Angle</p> <p>1E--OG 3 1E--OY 3 1G--OY 3</p>
	GaP	568	white diffused	*7	*25	60°	
WP130WDT/EYW	GaAsP/GaP	625	white diffused	*7	*30	60°	
	GaAsP/GaP	588	white diffused	*7	*20	60°	
WP130WDT/GYW	GaP	568	white diffused	*7	*25	60°	
	GaAsP/GaP	588	white diffused	*7	*20	60°	

WP42WUM/EGW	GaAsP/GaP	625	white diffused	*4	*13	100°	<p>T-1 (3mm) Right Angle</p> <p>3G--E 1 3Y--E 1 3Y--G 1</p>
	GaP	568	white diffused	*4	*13	100°	
WP42WUM/EYW	GaAsP/GaP	625	white diffused	*4	*13	100°	
	GaAsP/GaP	588	white diffused	*2.6	*6	100°	
WP42WUM/GYW	GaP	568	white diffused	*4	*13	100°	
	GaAsP/GaP	588	white diffused	*2.6	*6	100°	

NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

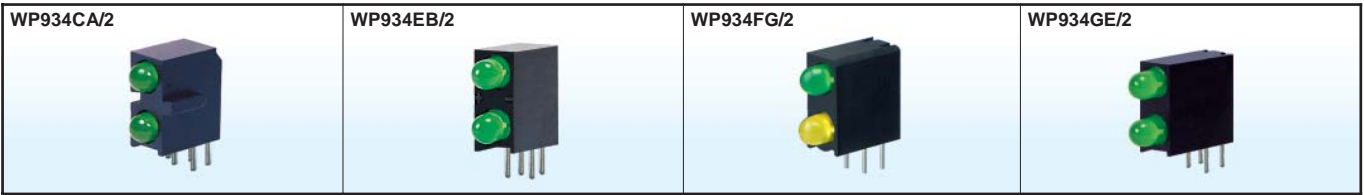

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP934CA/2ID-90	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Bi-Level</p>
WP934CA/2SRD-90	GaAlAs	640	red diffused	*110	*300	40°	
WP934CA/2YD-90	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934CA/2GD-90	GaP	568	green diffused	8	20	40°	

WP934EB/2ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Bi-Level</p>
WP934EB/2SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934EB/2YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934EB/2GD	GaP	568	green diffused	8	20	40°	

WP934FG/2ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Bi-Level</p>
WP934FG/2SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934FG/2YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934FG/2GD	GaP	568	green diffused	8	20	40°	

WP934GE/2ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Bi-Level</p>
WP934GE/2SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934GE/2YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934GE/2GD	GaP	568	green diffused	8	20	40°	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP934GO/2ID	GaAsP/GaP	625	red diffused	8	20	40°	T-1 (3mm) Bi-Level
WP934GO/2SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934GO/2YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934GO/2GD	GaP	568	green diffused	8	20	40°	

WP934MD/2ID	GaAsP/GaP	625	red diffused	8	20	40°	T-1 (3mm) Bi-Level
WP934MD/2SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934MD/2YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934MD/2GD	GaP	568	green diffused	8	20	40°	

WP130WCP/2EGW	GaAsP/GaP	625	white diffused	*7	*30	60°	T-1(3mm) Bi-Level
	GaP	568		*7	*25		
WP130WCP/2EYW	GaAsP/GaP	625	white diffused	*7	*30	60°	
	GaAsP/GaP	588		*7	*20		
WP130WCP/2GYW	GaP	568	white diffused	*7	*25	60°	
	GaAsP/GaP	588		*7	*20		

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

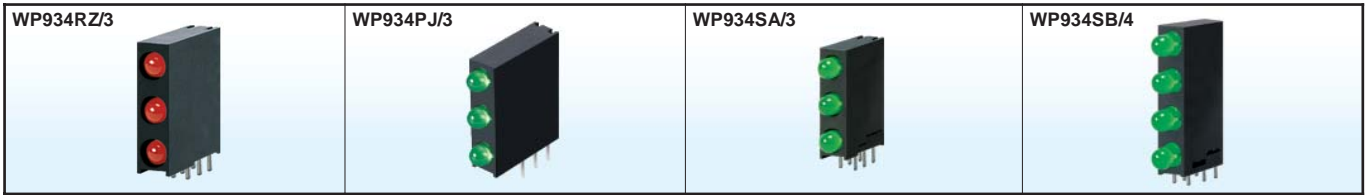

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP934RZ/3ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Tri-Level</p>
WP934RZ/3SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934RZ/3YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934RZ/3GD	GaP	568	green diffused	8	20	40°	


WP934PJ/3ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Tri-Level</p>
WP934PJ/3SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934PJ/3YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934PJ/3GD	GaP	568	green diffused	8	20	40°	

WP934SA/3ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Tri-Level</p>
WP934SA/3SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934SA/3YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934SA/3GD	GaP	568	green diffused	8	20	40°	

WP934SB/4ID	GaAsP/GaP	625	red diffused	8	20	40°	<p>T-1 (3mm) Quad-Level</p>
WP934SB/4SRD	GaAlAs	640	red diffused	*110	*300	40°	
WP934SB/4YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP934SB/4GD	GaP	568	green diffused	8	20	40°	

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

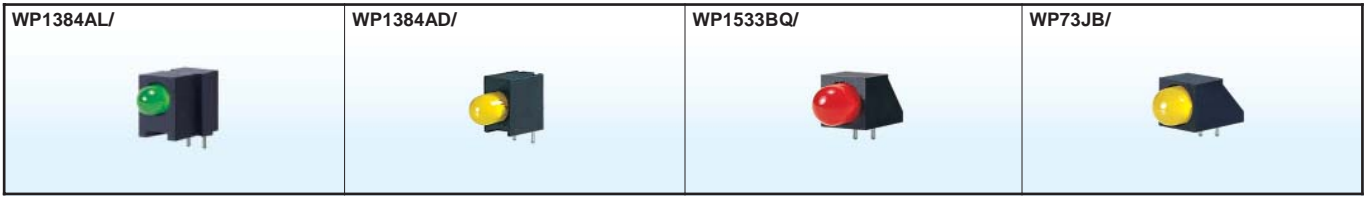

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP1384AL/ID	GaAsP/GaP	625	red diffused	12	20	60°	<p>3.4mm Right Angle</p>
WP1384AL/SRD	GaAlAs	640	red diffused	*70	*200	60°	
WP1384AL/YD	GaAsP/GaP	588	yellow diffused	8	15	60°	
WP1384AL/GD	GaP	568	green diffused	8	15	60°	


WP1384AD/ID	GaAsP/GaP	625	red diffused	12	20	60°	<p>3.4mm Right Angle</p>
WP1384AD/SRD	GaAlAs	640	red diffused	*70	*200	60°	
WP1384AD/YD	GaAsP/GaP	588	yellow diffused	8	15	60°	
WP1384AD/GD	GaP	568	green diffused	8	15	60°	

WP1533BQ/ID	GaAsP/GaP	625	red diffused	8	30	60°	<p>4.7mm Right Angle</p>
WP1533BQ/SRD	GaAlAs	640	red diffused	*110	*400	60°	
WP1533BQ/YD	GaAsP/GaP	588	yellow diffused	5	18	60°	
WP1533BQ/GD	GaP	568	green diffused	5	20	60°	

WP73JB/IDA	GaAsP/GaP	625	red diffused	8	30	60°	<p>4.8mm Right Angle</p>
WP73JB/SRDA	GaAlAs	640	red diffused	*110	*300	60°	
WP73JB/YDA	GaAsP/GaP	588	yellow diffused	5	20	60°	
WP73JB/GDA	GaP	568	green diffused	8	20	60°	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

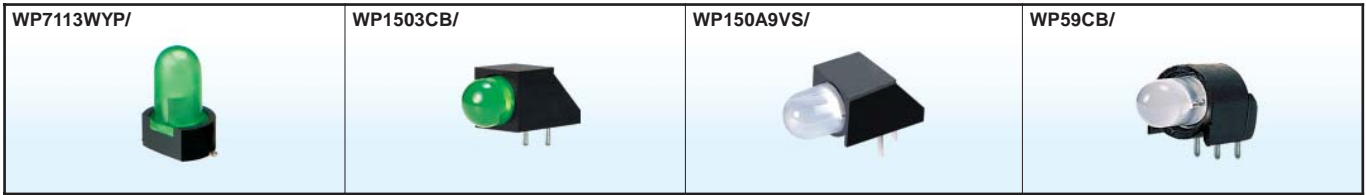

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


WP7113WYP/SEC/H	InGaAlP	630	water clear	*3800	*10000	20°	T-1 3/4 (5mm) With Spacer
WP7113WYP/VGC/H	InGaN	525	water clear	*7500	*18000	20°	
WP7113WYP/PBC/H	InGaN	470	water clear	*1500	*3200	16°	

WP1503CB/ID	GaAsP/GaP	625	red diffused	8	30	60°	T-1 3/4 (5mm) Right Angle
WP1503CB/SRD	GaAlAs	640	red diffused	*380	*700	60°	
WP1503CB/YD	GaAsP/GaP	588	yellow diffused	5	20	60°	
WP1503CB/GD	GaP	568	green diffused	5	20	60°	

WP150A9VS/EGW	GaAsP/GaP	625	white diffused	*18	*50	30°	T-1 3/4 (5mm) Right Angle
	GaP	568		*10	*45		
WP150A9VS/EYW	GaAsP/GaP	625	white diffused	*18	*50	30°	
	GaAsP/GaP	588		*7	*30		
WP150A9VS/GYW	GaP	568	white diffused	*10	*45	30°	
	GaAsP/GaP	588		*7	*30		

WP59CB/EGW	GaAsP/GaP	625	white diffused	*18	*60	60°	T-1 3/4 (5mm) Right Angle
	GaP	568		*18	*50		
WP59CB/EYW	GaAsP/GaP	625	white diffused	*18	*60	60°	
	GaAsP/GaP	588		*18	*40		
WP59CB/GYW	GaP	568	white diffused	*18	*50	60°	
	GaAsP/GaP	588		*18	*40		

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

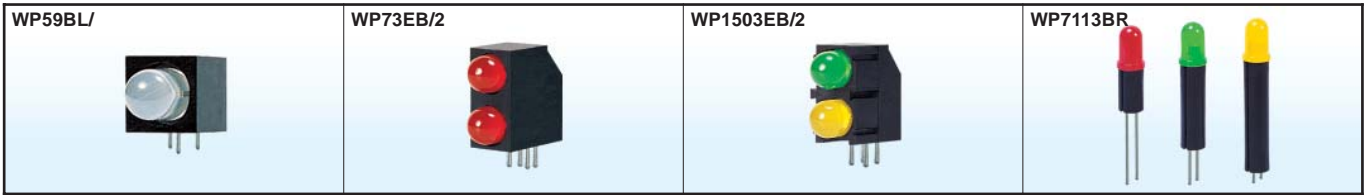

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP59BL/EGW	GaAsP/GaP	625	white diffused	*18	*60	T-1 3/4 (5mm) Right Angle
	GaP	568		*18	*50	
WP59BL/EYW	GaAsP/GaP	625	white diffused	*18	*60	
	GaAsP/GaP	588		*18	*40	
WP59BL/GYW	GaP	568	white diffused	*18	*50	
	GaAsP/GaP	588		*18	*40	

WP73EB/2IDA	GaAsP/GaP	625	red diffused	8	30	4.8mm Bi-Level
WP73EB/2SRDA	GaAlAs	640	red diffused	*110	*300	
WP73EB/2YDA	GaAsP/GaP	588	yellow diffused	5	20	
WP73EB/2GDA	GaP	568	green diffused	8	20	

WP1503EB/2ID	GaAsP/GaP	625	red diffused	8	30	T-1 3/4 (5mm) Bi-Level
WP1503EB/2SRD	GaAlAs	640	red diffused	*380	*700	
WP1503EB/2YD	GaAsP/GaP	588	yellow diffused	5	20	
WP1503EB/2GD	GaP	568	green diffused	5	20	


WP7113BR5.08/ID WP7113BR6.35/ID WP7113BR9.52/ID	GaAsP/GaP	625	red diffused	8	45	T-1 3/4 (5mm) With Spacer
WP7113BR5.08/SRD WP7113BR6.35/SRD WP7113BR9.52/SRD	GaAlAs	640	red diffused	*110	*300	
WP7113BR5.08/YD WP7113BR6.35/YD WP7113BR9.52/YD	GaAsP/GaP	588	yellow diffused	5	20	
WP7113BR5.08/GD WP7113BR6.35/GD WP7113BR9.52/GD	GaP	568	green diffused	5	20	
WP7113BR5.08/SGD WP7113BR6.35/SGD WP7113BR9.52/SGD	GaP	568	green diffused	*18	*40	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

WP914CK/4



WP917CK/4











Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP914CK/4IDT	GaAsP/GaP	625	red diffused	1.8	8	100°	2mm x 3mm Quad-Level
WP914CK/4YDT	GaAsP/GaP	588	yellow diffused	1	4	100°	
WP914CK/4GDT	GaP	568	green diffused	1.8	6	100°	







WP917CK/4EGWT	GaAsP/GaP	625	white diffused	*4	*10	100°	2mm x 3mm Quad-Level
	GaP	568		*4	*10		
WP917CK/4YGWT	GaAsP/GaP	588	white diffused	*2.6	*6	100°	
	GaP	568		*4	*10		

NOTES:


1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

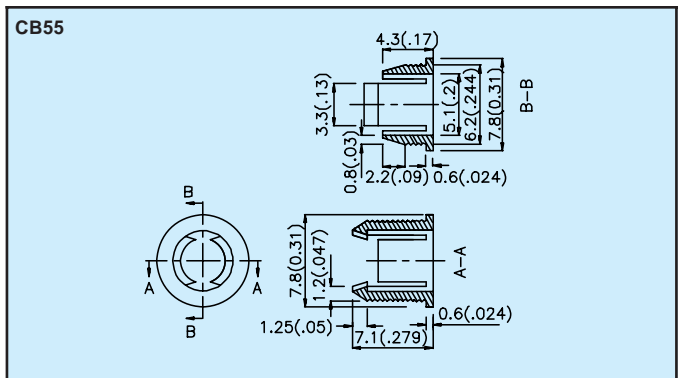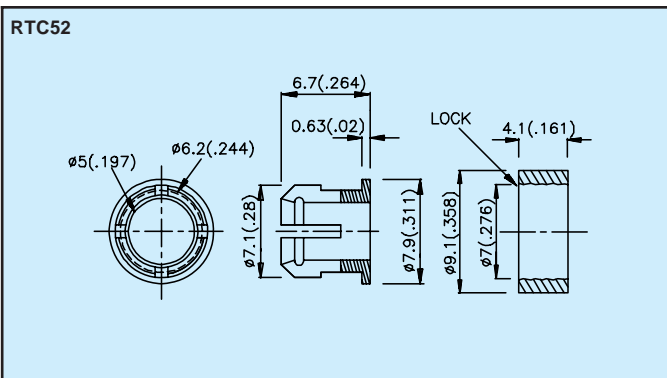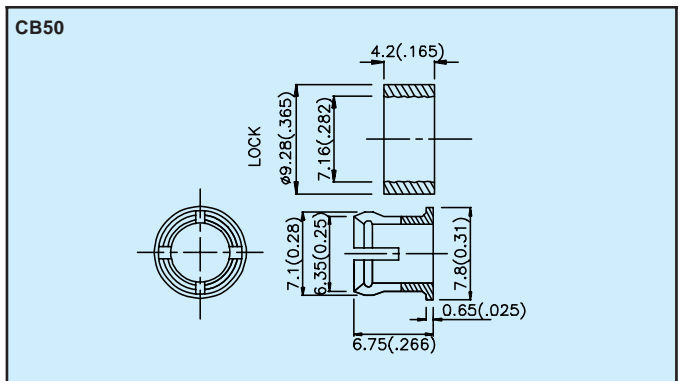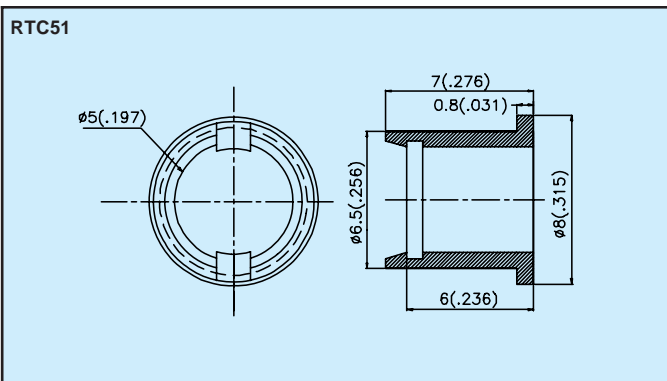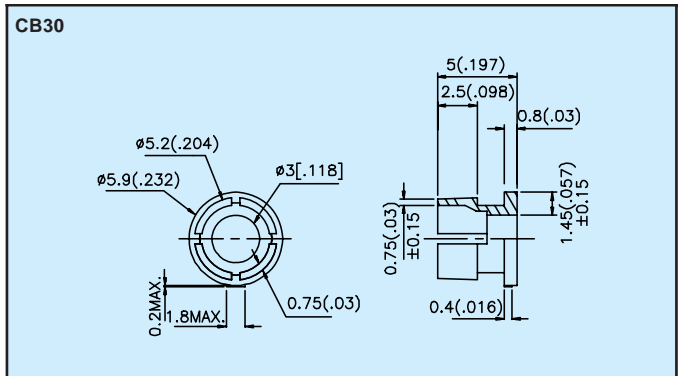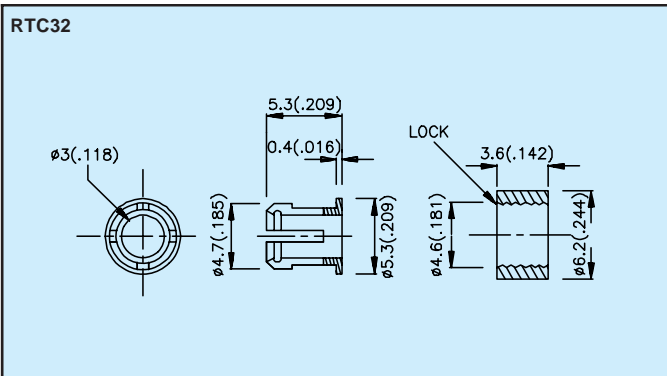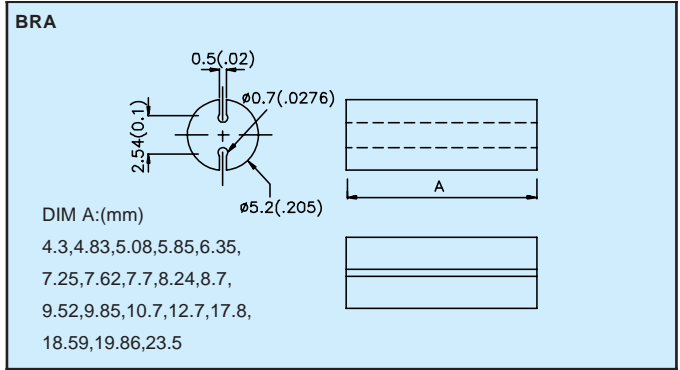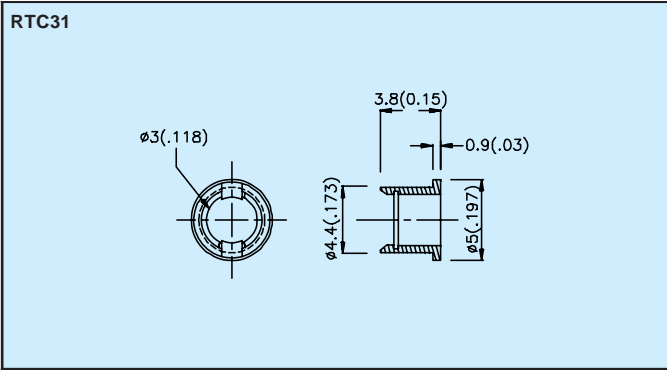

NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01")$ unless otherwise noted.

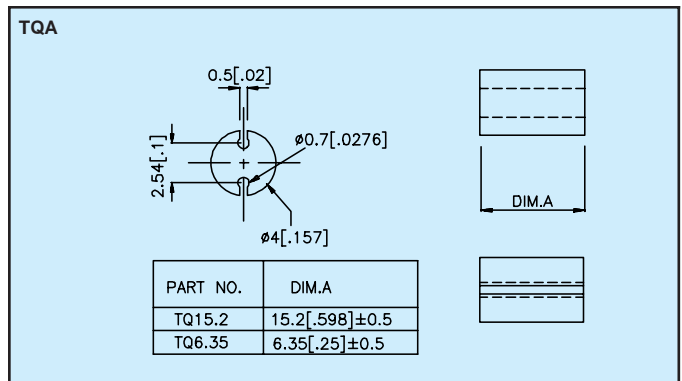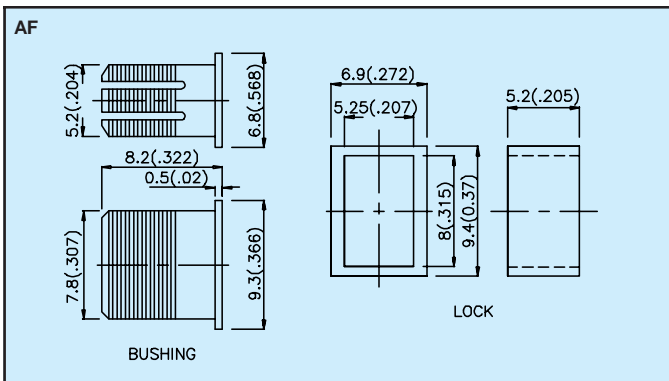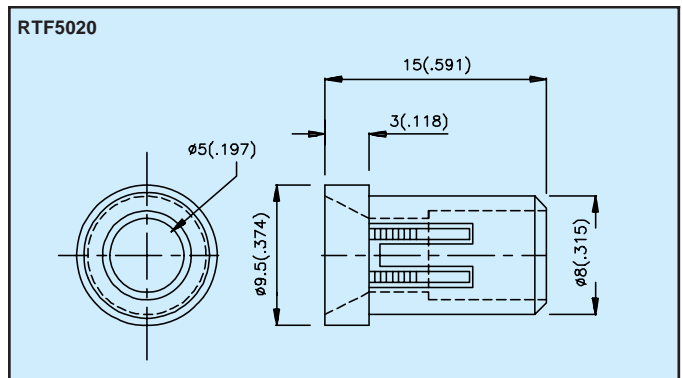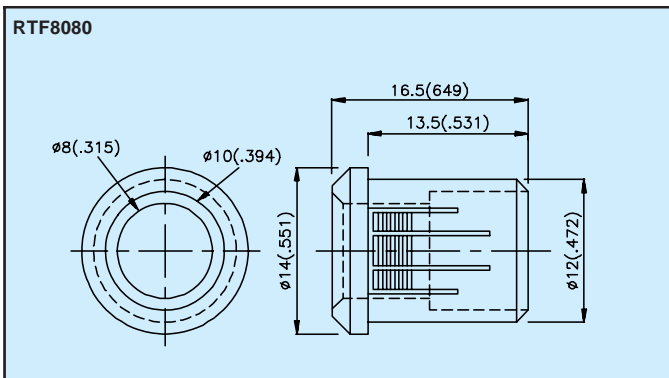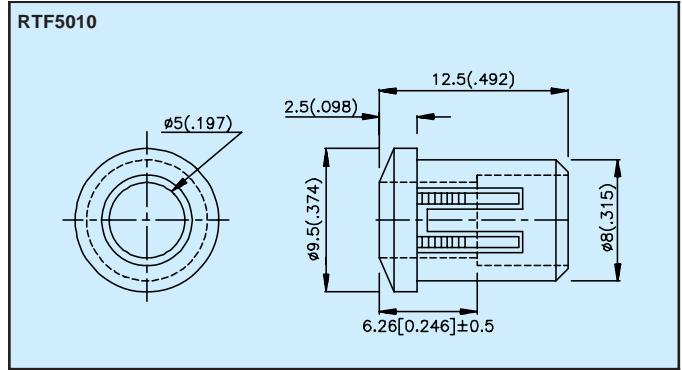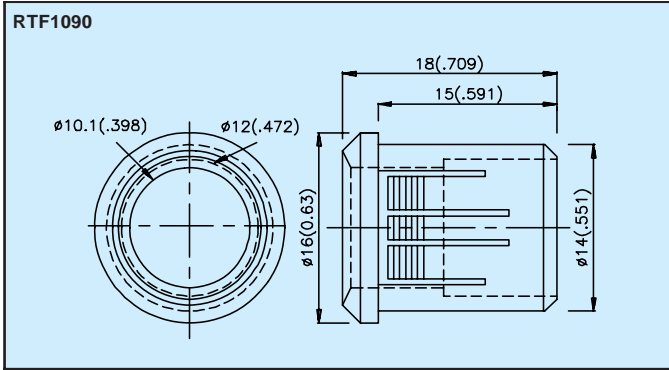


NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

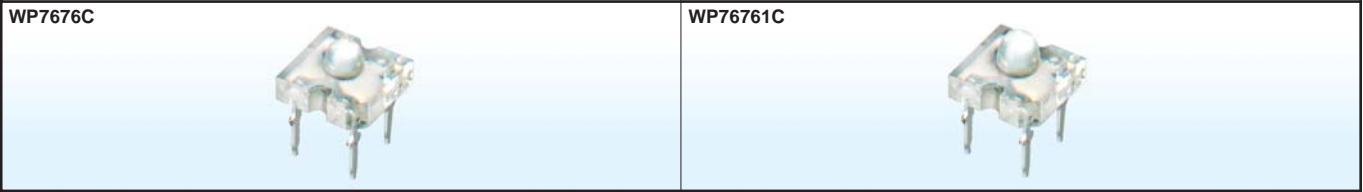


Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA *70mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP7676CSURC	InGaAlP	628	water clear	280	500	70°	7.6mm x 7.6mm
				*480	*1000	70°	
WP7676CSEC/E	InGaAlP	621	water clear	480	800	70°	
				*1500	*2800	70°	
WP7676CSEC/H	InGaAlP	630	water clear	1500	1800	70°	
				*4700	*7000	70°	
WP7676CSYC	InGaAlP	588	water clear	180	400	70°	
				*280	*700	70°	
WP7676CSYC/H	InGaAlP	589	water clear	280	450	70°	
				*480	*1100	70°	
WP7676CPBC/H	InGaN	470	water clear	380	800	70°	
				*1200	*1900	70°	

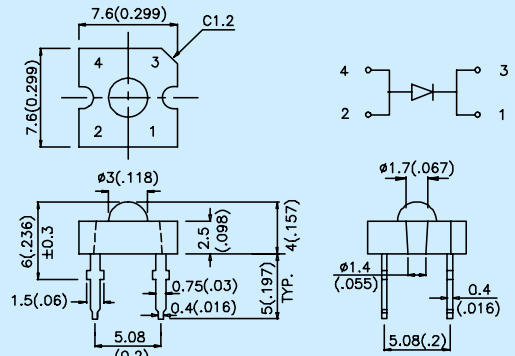


WP76761CSURC	InGaAlP	628	water clear	900	2000	20°	7.6mm x 7.6mm
				*3300	*7000	20°	
WP76761CSEC/E	InGaAlP	621	water clear	1800	3400	20°	
				*5700	*10000	20°	
WP76761CSEC/H	InGaAlP	630	water clear	2800	4500	20°	
				*12000	*18000	20°	
WP76761CSYC	InGaAlP	588	water clear	380	800	20°	
				*1500	*2700	20°	
WP76761CSYC/H	InGaAlP	589	water clear	480	900	20°	
				*1800	*3200	20°	
WP76761CPBC/H	InGaN	470	water clear	1200	2400	20°	
				*3300	*5800	20°	

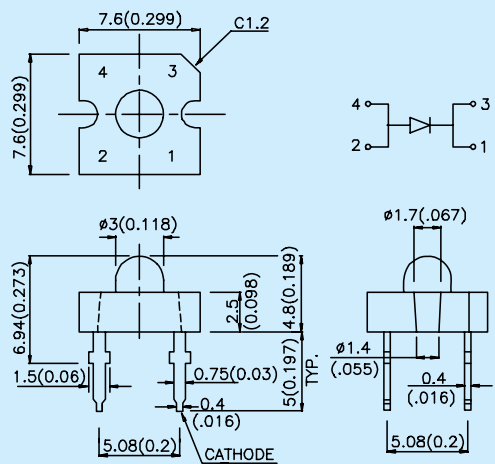

1. DRIVE CURRENT BETWEEN 10mA AND 30mA ARE RECOMMENDED FOR LONG TERM PERFORMANCE.
2. OPERATION AT CURRENT BELOW 10mA IS NOT RECOMMENDED.

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

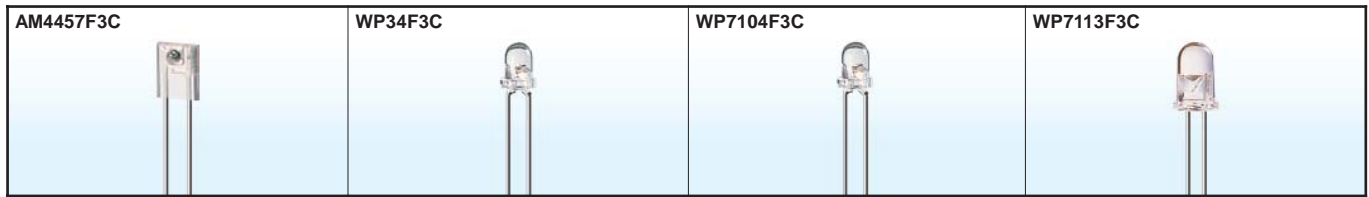

Part No.	Material	λ P (nm)	Lens Type	Po (mW/sr) @20mA *50mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

AM4457F3C	GaAs	940	water clear	0.8	4	70°	1.5mm (Side Look)
-----------	------	-----	-------------	-----	---	-----	-----------------------

WP34F3C	GaAs	940	water clear	1.6	10	50°	T-1 (3mm) Round
WP34F3BT	GaAs	940	blue transparent	*4	*20	50°	
WP34SF4C	GaAlAs	880	water clear	1.6	4	50°	
WP34SF4BT	GaAlAs	880	blue transparent	*4	*20	50°	
WP34SF6C	GaAlAs	860	water clear	7	15	50°	
WP34SF6BT	GaAlAs	860	blue transparent	*7	*20	50°	
WP34SF7C	GaAlAs	850	water clear	7	18	50°	
WP34SF7BT	GaAlAs	850	blue transparent	*7	*18	50°	
WP34SF7BT	GaAlAs	850	blue transparent	*10	*45	50°	

WP7104F3C	GaAs	940	water clear	7	30	34°	T-1 (3mm) Round
WP7104F3BT	GaAs	940	blue transparent	*18	*80	34°	
WP7104F3BT	GaAs	940	blue transparent	7	28	34°	
WP7104F3BT	GaAs	940	blue transparent	*18	*70	34°	

WP7113F3BT	GaAs	940	blue transparent	4	20	20°	T-1 3/4 (5mm) Round
WP7113F3BT	GaAs	940	blue transparent	*7	*30	20°	
WP7113SF4C	GaAlAs	880	water clear	7	20	20°	
WP7113SF4C	GaAlAs	880	water clear	*10	*30	20°	
WP7113SF6C	GaAlAs	860	water clear	10	40	20°	
WP7113SF6C	GaAlAs	860	water clear	*50	*100	20°	
WP7113SF7C	GaAlAs	850	water clear	10	40	20°	
WP7113SF7C	GaAlAs	850	water clear	*50	*100	20°	

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

WP32P3C



WP7113P3C




T-1 (3mm) PHOTOTRANSISTOR

WP32P3C WATER CLEAR LENS


T-1 3/4 (5mm) PHOTOTRANSISTOR

WP7113P3C WATER CLEAR LENS

WP32P3C

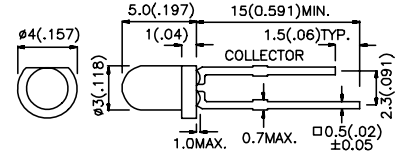

WP7113P3C

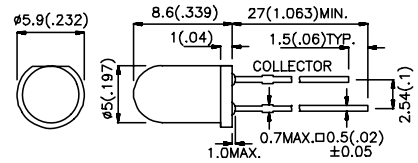

ELECTRICAL AND RADIANT CHARACTERISTICS T_A=25°C


Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition
V _{BR CEO}	Collector-to-Emitter Breakdown Voltage	30	-	-	V	I _C =100μA E _e =0mW/cm ²
V _{BR ECO}	Emitter-to-Collector Breakdown Voltage	5	-	-	V	I _E =100μA E _e =0mW/cm ²
V _{CE (SAT)}	Collector-to-Emitter Saturation Voltage	-	-	0.8	V	I _C =2mA E _e =20mW/cm ²
I _{CEO}	Collector Dark Current	-	-	100	nA	V _{CE} =10V E _e =0mW/cm ²
T _R	Rise Time (10% to 90%)	-	3	-	μs	V _{CE} =5V I _C =1mA R _L =1KΩ
T _F	Fall Time (90% to 10%)	-	3	-	μs	
I _(ON)	On State Collector Current	0.1	0.5	-	mA	V _{CE} =5V, E _e =1mW/cm ² , λ=940nm

ABSOLUTE MAXIMUM RATING T_A=25°C

Parameter	Max. Ratings
Collector-to-Emitter Breakdown Voltage	30V
Emitter-to-Collector Breakdown Voltage	5V
Power Dissipation at (or below) 25°C Free Air Temperature	100mW
Operating Temperature Range	-40°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C
Lead Soldering Temperature (>5mm For 5sec)	260°C

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

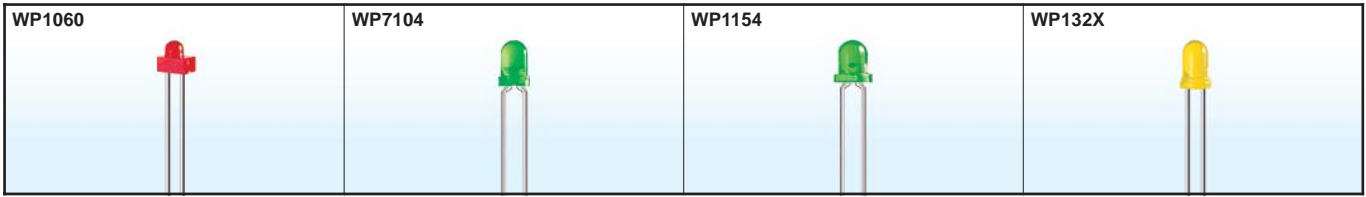

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP1060ID	GaAsP/GaP	625	red diffused	8	15	70°	1.8mm Round
WP1060ED	GaAsP/GaP	625	orange diffused	8	15	70°	
WP1060SRD	GaAlAs	640	red diffused	*70	*200	70°	
WP1060YD	GaAsP/GaP	588	yellow diffused	5	8	70°	
WP1060GD	GaP	568	green diffused	5	10	70°	


WP7104ID	GaAsP/GaP	625	red diffused	8	20	40°	T-1 (3mm) Round
WP7104IT	GaAsP/GaP	625	red transparent	18	60	34°	
WP7104ED	GaAsP/GaP	625	orange diffused	8	20	40°	
WP7104EC	GaAsP/GaP	625	water clear	18	60	34°	
WP7104ND	GaAsP/GaP	610	orange diffused	8	30	40°	
WP7104NT	GaAsP/GaP	610	orange transparent	18	50	34°	
WP7104NC	GaAsP/GaP	610	water clear	18	50	34°	
WP7104YD	GaAsP/GaP	588	yellow diffused	5	15	40°	
WP7104YT	GaAsP/GaP	588	yellow transparent	8	20	34°	
WP7104YC	GaAsP/GaP	588	water clear	8	20	34°	
WP7104GD	GaP	568	green diffused	8	20	40°	
WP7104GT	GaP	568	green transparent	18	60	34°	
WP7104GC	GaP	568	water clear	18	60	34°	
WP7104PGD	GaP	555	green diffused	1.8	5	40°	
WP7104PGT	GaP	555	green transparent	3	15	34°	
WP7104PGC	GaP	555	water clear	3	15	34°	

WP1154ID	GaAsP/GaP	625	red diffused	8	25	60°	T-1 (3mm) Round
WP1154IT	GaAsP/GaP	625	red transparent	18	60	50°	
WP1154ND	GaAsP/GaP	610	orange diffused	8	30	60°	
WP1154NT	GaAsP/GaP	610	orange transparent	18	50	50°	
WP1154YD	GaAsP/GaP	588	yellow diffused	5	15	60°	
WP1154YT	GaAsP/GaP	588	yellow transparent	8	20	50°	
WP1154GD	GaP	568	green diffused	8	15	60°	
WP1154GT	GaP	568	green transparent	18	40	50°	
WP1154PGD	GaP	555	green diffused	1.8	5	60°	
WP1154PGT	GaP	555	green transparent	3	10	50°	

WP132XID	GaAsP/GaP	625	red diffused	8	25	60°	T-1 (3mm) Round
WP132XIT	GaAsP/GaP	625	red transparent	18	60	50°	
WP132XND	GaAsP/GaP	610	orange diffused	8	30	60°	
WP132XNT	GaAsP/GaP	610	orange transparent	18	50	50°	
WP132XNC	GaAsP/GaP	610	water clear	18	50	50°	
WP132XYD	GaAsP/GaP	588	yellow diffused	5	15	60°	
WP132XYT	GaAsP/GaP	588	yellow transparent	8	20	50°	
WP132Xyc	GaAsP/GaP	588	water clear	8	20	50°	
WP132XGD	GaP	568	green diffused	8	15	60°	
WP132XGT	GaP	568	green transparent	12	40	50°	
WP132XGC	GaP	568	water clear	12	40	50°	
WP132XPGD	GaP	555	green diffused	1.8	5	60°	
WP132XPGT	GaP	555	green transparent	3	10	50°	
WP132XPGC	GaP	555	water clear	3	10	50°	

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

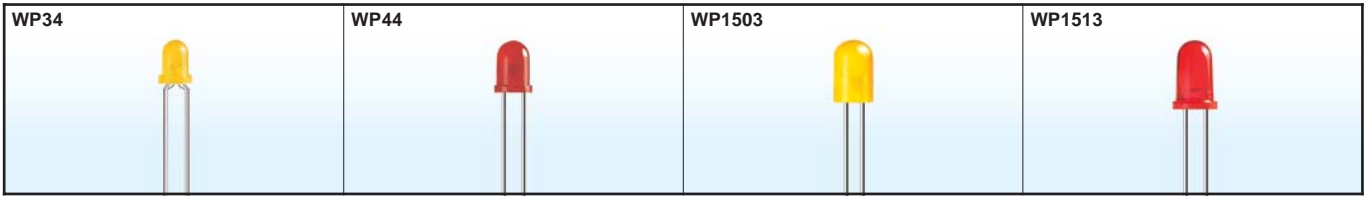

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP34HD	GaP	660	red diffused	1	3	60°	T-1 (3mm) Round
WP34ID	GaAsP/GaP	625	red diffused	8	25	60°	
WP34AD	GaAsP/GaP	588	amber diffused	3	12	60°	
WP34YD	GaAsP/GaP	588	yellow diffused	1.8	6	60°	
WP34GD	GaP	568	green diffused	5	20	60°	


WP44HD	GaP	660	red diffused	0.7	2	80°	4mm Round
WP44ID	GaAsP/GaP	625	red diffused	5	15	80°	
WP44YD	GaAsP/GaP	588	yellow diffused	3	10	80°	
WP44GD	GaP	568	green diffused	3	12	80°	

WP1503ID	GaAsP/GaP	625	red diffused	8	30	60°	T-1 3/4 (5mm) Round
WP1503IT	GaAsP/GaP	625	red transparent	28	80	30°	
WP1503EC	GaAsP/GaP	625	water clear	28	80	30°	
WP1503SRC/D	GaAlAs	640	water clear	*900	*1500	30°	
WP1503SRC/E	GaAlAs	640	water clear	*1800	*2800	30°	
WP1503SRC/F	GaAlAs	640	water clear	*3300	*4000	30°	
WP1503SRD	GaAlAs	640	red diffused	*380	*700	60°	
WP1503YD	GaAsP/GaP	588	yellow diffused	5	20	60°	
WP1503YT	GaAsP/GaP	588	yellow transparent	18	40	30°	
WP1503YC	GaAsP/GaP	588	water clear	18	40	30°	
WP1503GD	GaP	568	green diffused	5	20	60°	
WP1503GT	GaP	568	green transparent	18	60	30°	
WP1503GC	GaP	568	water clear	18	60	30°	
WP1503SGC	GaP	568	water clear	*70	*200	30°	
WP1503SGT	GaP	568	green transparent	*70	*150	30°	

WP1513IT	GaAsP/GaP	625	red transparent	40	80	20°	T-1 3/4 (5mm) Round
WP1513EC	GaAsP/GaP	625	water clear	40	80	20°	
WP1513SURC	InGaAlP	628	water clear	*1200	*1800	20°	
WP1513SURC/E	InGaAlP	630	water clear	*1500	*2200	20°	
WP1513YT	GaAsP/GaP	588	yellow transparent	18	40	20°	
WP1513YC	GaAsP/GaP	588	water clear	18	40	20°	
WP1513GT	GaP	568	green transparent	18	50	20°	
WP1513GC	GaP	568	water clear	18	50	20°	

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

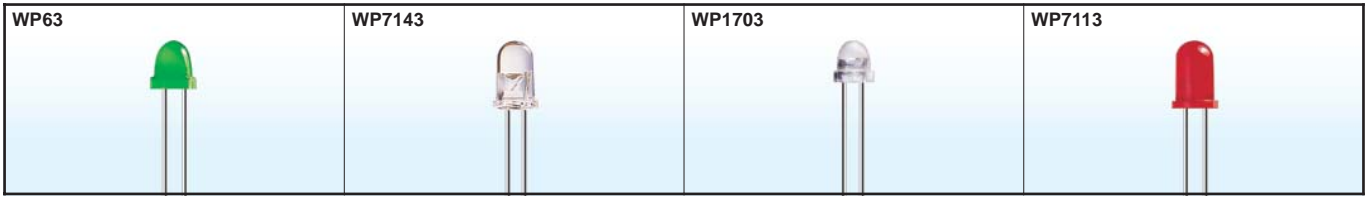

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ/2	Dimension
				Min.	Typ.		

WP63ID	GaAsP/GaP	625	red diffused	12	20	60°	T-1 3/4 (5mm) Round
WP63IT	GaAsP/GaP	625	red transparent	28	50	30°	
WP63SRD	GaAlAs	640	red diffused	*110	*300	60°	
WP63SRT	GaAlAs	640	red transparent	*280	*600	30°	
WP63SRC	GaAlAs	640	water clear	*180	*700	30°	
WP63YD	GaAsP/GaP	588	yellow diffused	1.8	6	60°	
WP63YT	GaAsP/GaP	588	yellow transparent	18	35	30°	
WP63GD	GaP	568	green diffused	5	12	60°	
WP63GT	GaP	568	green transparent	18	40	30°	


WP7143SRC/D	GaAlAs	640	water clear	*650	*900	30°	T-1 3/4 (5mm) Round
WP7143SURC	InGaAlP	628	water clear	*480	*850	30°	
WP7143SURC/E	InGaAlP	630	water clear	*650	*1300	30°	
WP7143SGC	GaP	568	water clear	*70	*150	30°	

WP1703SURC	InGaAlP	628	water clear	*280	*700	50°	T-1 3/4 (5mm) Round
WP1703SURC/E	InGaAlP	630	water clear	*650	*1000	50°	

WP7113ID	GaAsP/GaP	625	red diffused	8	45	30°	T-1 3/4 (5mm) Round
WP7113IT	GaAsP/GaP	625	red transparent	28	80	20°	
WP7113EC	GaAsP/GaP	625	water clear	28	80	20°	
WP7113ED	GaAsP/GaP	625	orange diffused	8	25	30°	
WP7113ND	GaAsP/GaP	610	orange diffused	12	30	30°	
WP7113NT	GaAsP/GaP	610	orange transparent	40	80	20°	
WP7113NC	GaAsP/GaP	610	water clear	40	80	20°	
WP7113YD	GaAsP/GaP	588	yellow diffused	5	20	30°	
WP7113YT	GaAsP/GaP	588	yellow transparent	18	40	20°	
WP7113YC	GaAsP/GaP	588	water clear	18	40	20°	
WP7113GD	GaP	568	green diffused	5	20	30°	
WP7113GT	GaP	568	green transparent	18	60	20°	
WP7113GC	GaP	568	water clear	18	60	20°	
WP7113PGD	GaP	555	green diffused	1.8	5	30°	
WP7113PGT	GaP	555	green transparent	5	10	20°	
WP7113PGC	GaP	555	water clear	5	10	20°	
WP7113SRSGW	GaAlAs	640	white diffused	*110	*200	35°	
	GaP	568		*18	*60		

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

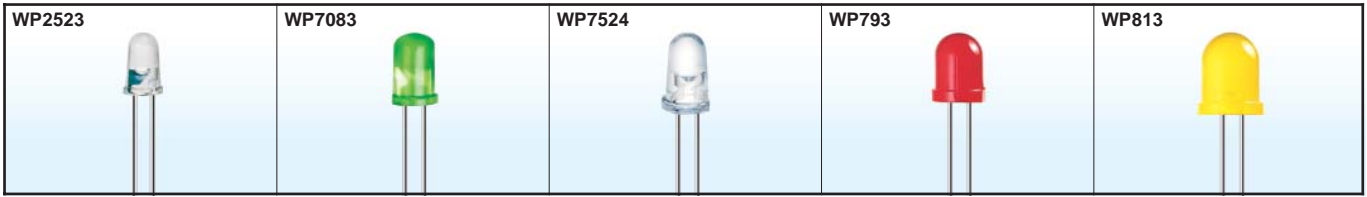

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP2523SURC	InGaAlP	628	water clear	*1200	*4000	12°	T-1 3/4 (5mm) Round
WP2523SURC/E	InGaAlP	630	water clear	*1500	*4500	12°	

WP7083ID	GaAsP/GaP	625	red diffused	8	25	60°	5mm Round
WP7083SED/H	InGaAlP	630	orange diffused	*2200	*3600	60°	
WP7083YD	GaAsP/GaP	588	yellow diffused	1.8	8	60°	
WP7083SYD/H	InGaAlP	589	yellow diffused	*180	*420	60°	
WP7083SGD	GaP	568	green diffused	*10	*35	60°	
WP7083VGD/H	InGaN	525	green diffused	*1500	*2200	60°	
WP7083PBD/H	InGaN	470	blue diffused	*280	*450	60°	


WP7524SEC/H	InGaAlP	630	water clear	*5700	*9500	18°	5mm Round
WP7524SYC/H	InGaAlP	589	water clear	*1800	*2800	18°	
WP7524VGC/H	InGaN	525	water clear	*6700	*13000	18°	
WP7524PBC/H	InGaN	470	water clear	*1800	*3300	18°	

WP793ID	GaAsP/GaP	625	red diffused	*36	*100	60°	8mm Round
WP793SRC/D	GaAlAs	640	water clear	*1500	*1700	40°	
WP793SRC/E	GaAlAs	640	water clear	*1800	*2700	40°	
WP793SRC/F	GaAlAs	640	water clear	*2800	*3800	40°	
WP793SRD/D	GaAlAs	640	red diffused	*280	*350	60°	
WP793SRD/E	GaAlAs	640	red diffused	*380	*450	60°	
WP793SRD/F	GaAlAs	640	red diffused	*480	*600	60°	
WP793SRD/G	GaAlAs	640	red diffused	*650	*700	60°	
WP793SRD/H	GaAlAs	640	red diffused	*900	*1200	60°	
WP793ED	GaAsP/GaP	625	orange diffused	*36	*100	60°	
WP793YD	GaAsP/GaP	588	yellow diffused	*18	*50	60°	
WP793GD	GaP	568	green diffused	*18	*60	60°	

WP813ID	GaAsP/GaP	625	red diffused	*36	*100	60°	10mm Round
WP813SRC/D	GaAlAs	640	water clear	*1500	*1700	40°	
WP813SRC/E	GaAlAs	640	water clear	*1800	*2700	40°	
WP813SRC/F	GaAlAs	640	water clear	*2800	*3800	40°	
WP813SRD/D	GaAlAs	640	red diffused	*280	*350	60°	
WP813SRD/E	GaAlAs	640	red diffused	*380	*450	60°	
WP813SRD/F	GaAlAs	640	red diffused	*480	*600	60°	
WP813SRD/G	GaAlAs	640	red diffused	*650	*700	60°	
WP813SRD/H	GaAlAs	640	red diffused	*900	*1200	60°	
WP813ED	GaAsP/GaP	625	orange diffused	*36	*100	60°	
WP813YD	GaAsP/GaP	588	yellow diffused	*10	*50	60°	
WP813GD	GaP	568	green diffused	*18	*60	60°	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

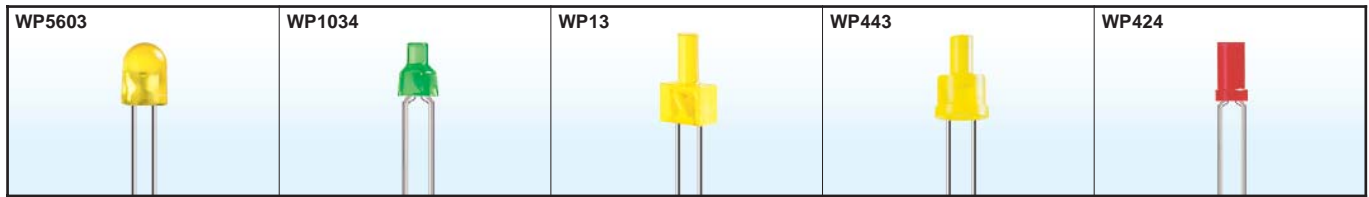

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP5603SIDL/SD/H	InGaAlP	630	red semi diffused	*650	*2500	100° (H) 50° (V)	<p>5.2mm Oval</p>
WP5603SYDL/SD/H	InGaAlP	589	yellow semi diffused	*380	*750	100° (H) 50° (V)	
WP5603VGD/SD/H	InGaN	525	green semi diffused	*650	*2100	100° (H) 50° (V)	
WP5603PBD/SD/H	InGaN	470	blue semi diffused	*480	*1100	100° (H) 50° (V)	


WP1034IDT	GaAsP/GaP	625	red diffused	3	8	70°	<p>2mm Flat Top</p>
WP1034HDT	GaP	660	red diffused	0.4	1	70°	
WP1034YDT	GaAsP/GaP	588	yellow diffused	1.8	5	70°	
WP1034GDT	GaP	568	green diffused	1.8	6	70°	

WP13HD	GaP	660	red diffused	0.4	1.5	70°	<p>2mm Flat Top</p>
WP13ID	GaAsP/GaP	625	red diffused	5	10	70°	
WP13YD	GaAsP/GaP	588	yellow diffused	3	8	70°	
WP13GD	GaP	568	green diffused	3	10	70°	

WP443HDT	GaP	660	red diffused	0.4	2	100°	<p>2.4mm Flat Top</p>
WP443IDT	GaAsP/GaP	625	red diffused	3	10	100°	
WP443EDT	GaAsP/GaP	625	orange diffused	3	10	100°	
WP443YDT	GaAsP/GaP	588	yellow diffused	1	5	100°	
WP443GDT	GaP	568	green diffused	1	5	100°	

WP424HDT	GaP	660	red diffused	0.4	1	100°	<p>T-1 (3mm) Cylindrical</p>
WP424IDT	GaAsP/GaP	625	red diffused	3	5	100°	
WP424SRDT	GaAlAs	640	red diffused	*36	*100	100°	
WP424EDT	GaAsP/GaP	625	orange diffused	3	5	100°	
WP424YDT	GaAsP/GaP	588	yellow diffused	1	4	100°	
WP424GDT	GaP	568	green diffused	1	4	100°	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

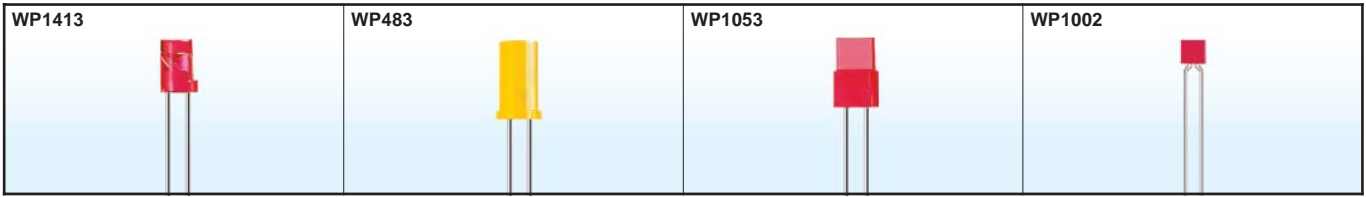

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


							4mm Cylindrical
WP1413HDT	GaP	660	red diffused	0.3	1	100°	
WP1413IDT	GaAsP/GaP	625	red diffused	3	5	100°	
WP1413ITL	GaAsP/GaP	625	red transparent	12	20	70°	
WP1413SRDT	GaAlAs	640	red diffused	*50	*80	100°	
WP1413YDT	GaAsP/GaP	588	yellow diffused	1	3	100°	
WP1413GDT	GaP	568	green diffused	1	3	100°	
WP1413SGDL	GaP	568	green diffused	*2.6	*10	100°	

							T-1 3/4 (5mm) Cylindrical
WP483HDT	GaP	660	red diffused	0.4	1	100°	
WP483IDT	GaAsP/GaP	625	red diffused	1.8	5	100°	
WP483EDT	GaAsP/GaP	625	orange diffused	3	7	100°	
WP483YDT	GaAsP/GaP	588	yellow diffused	0.7	3	100°	
WP483GDT	GaP	568	green diffused	1	4	100°	
WP483SRSGW	GaAlAs	640	white diffused	*18	*50	80°	
	GaP	568		*4	*10		

							1mm x 5mm Rectangular
WP1053HDT	GaP	660	red diffused	0.4	1	110°	
WP1053IDT	GaAsP/GaP	625	red diffused	3	8	110°	
WP1053YDT	GaAsP/GaP	588	yellow diffused	1.8	5	110°	
WP1053GDT	GaP	568	green diffused	1.8	5	110°	


							1.1mm x 3.4mm Rectangular
WP1002HD	GaP	660	red diffused	0.2	0.7	110°	
WP1002ID	GaAsP/GaP	625	red diffused	1	3	110°	
WP1002YD	GaAsP/GaP	588	yellow diffused	0.4	2.5	110°	
WP1002GD	GaP	568	green diffused	0.4	2.5	110°	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

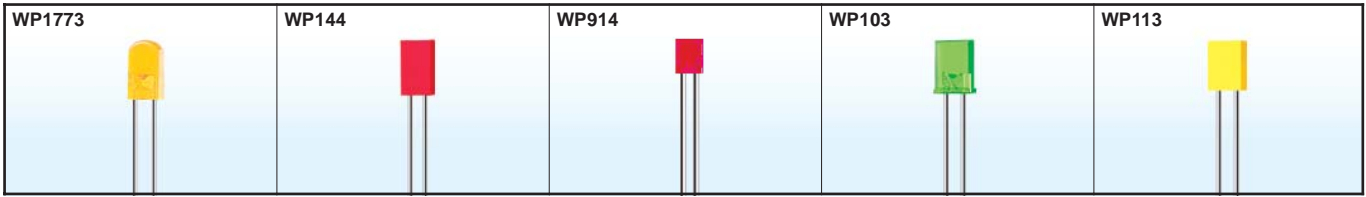

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		
WP1773HD	GaP	660	red diffused	0.7	2	100°	1.75mm x 4mm Rectangular
WP1773ID	GaAsP/GaP	625	red diffused	5	10	100°	
WP1773ED	GaAsP/GaP	625	orange diffused	5	10	100°	
WP1773ND	GaAsP/GaP	610	orange diffused	5	8	100°	
WP1773YD	GaAsP/GaP	588	yellow diffused	3	8	100°	
WP1773GD	GaP	568	green diffused	3	10	100°	
WP144HDT	GaP	660	red diffused	0.4	1	110°	1.9mm x 3.9mm Rectangular
WP144IDT	GaAsP/GaP	625	red diffused	3	6	110°	
WP144SRDT	GaAlAs	640	red diffused	*36	*70	110°	
WP144EDT	GaAsP/GaP	625	orange diffused	3	6	110°	
WP144YDT	GaAsP/GaP	588	yellow diffused	1	3	110°	
WP144GDT	GaP	568	green diffused	1	4	110°	
WP914HDT	GaP	660	red diffused	0.2	1	100°	2mm x 3mm Rectangular
WP914HT	GaP	660	red transparent	0.4	1	90°	
WP914IDT	GaAsP/GaP	625	red diffused	1.8	8	100°	
WP914IT	GaAsP/GaP	625	red transparent	3	8	90°	
WP914EDT	GaAsP/GaP	625	orange diffused	1.8	8	100°	
WP914ET	GaAsP/GaP	625	orange transparent	3	8	90°	
WP914ADT	GaAsP/GaP	588	amber diffused	1.8	5	100°	
WP914AT	GaAsP/GaP	588	amber transparent	1.8	7	90°	
WP914GDT	GaP	568	green diffused	1.8	6	100°	
WP914GT	GaP	568	green transparent	3	8	90°	
WP914PGT	GaP	555	green transparent	0.4	1	90°	
WP103HDT	GaP	660	red diffused	0.4	1	110°	2mm x 5mm Rectangular
WP103IDT	GaAsP/GaP	625	red diffused	1.8	5	110°	
WP103SRDT	GaAlAs	640	red diffused	*36	*80	110°	
WP103EDT	GaAsP/GaP	625	orange diffused	1.8	5	110°	
WP103YDT	GaAsP/GaP	588	yellow diffused	1	4	110°	
WP103GDT	GaP	568	green diffused	1.8	5	110°	
WP113HDT	GaP	660	red diffused	0.4	1	110°	2mm x 5mm Rectangular
WP113IDT	GaAsP/GaP	625	red diffused	3	5	110°	
WP113SRDT	GaAlAs	640	red diffused	*36	*80	110°	
WP113EDT	GaAsP/GaP	625	orange diffused	3	5	110°	
WP113YDT	GaAsP/GaP	588	yellow diffused	1	4	110°	
WP113GDT	GaP	568	green diffused	1.8	5	110°	
WP113SRSGWT	GaAlAs	640	white diffused	*36	*70	100°	
	GaP	568		*7	*10		

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

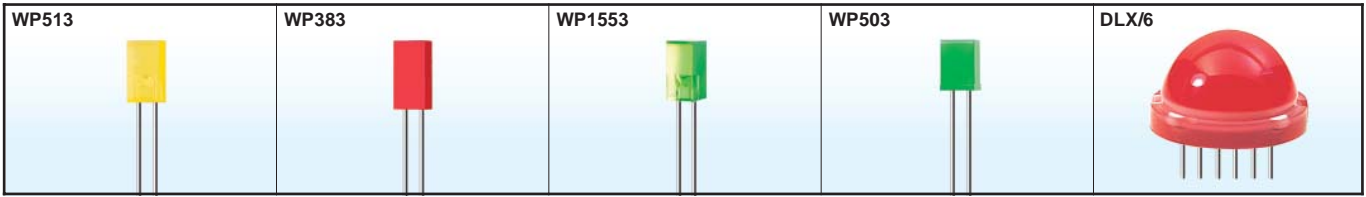

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA *20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		
WP513HDT	GaP	660	red diffused	0.4	1	110°	2.5mm x 5mm Rectangular
WP513IDT	GaAsP/GaP	625	red diffused	1.8	5	110°	
WP513EDT	GaAsP/GaP	625	orange diffused	1.8	5	110°	
WP513YDT	GaAsP/GaP	588	yellow diffused	1	3	110°	
WP513GDT	GaP	568	green diffused	1	3	110°	
WP513SGDT	GaP	568	green diffused	*7	*10	110°	
WP383HDT	GaP	660	red diffused	0.4	1	110°	2.5mm x 5mm Rectangular
WP383IDT	GaAsP/GaP	625	red diffused	3	5	110°	
WP383SRDT	GaAlAs	640	red diffused	*36	*70	110°	
WP383EDT	GaAsP/GaP	625	orange diffused	3	5	110°	
WP383YDT	GaAsP/GaP	588	yellow diffused	1	4	110°	
WP383GDT	GaP	568	green diffused	1	4	110°	
WP1553HDT	GaP	660	red diffused	0.4	1	110°	5mm x 5mm Square
WP1553IDT	GaAsP/GaP	625	red diffused	3	8	110°	
WP1553SRDT	GaAlAs	640	red diffused	*36	*80	110°	
WP1553EDT	GaAsP/GaP	625	orange diffused	3	8	110°	
WP1553YDT	GaAsP/GaP	588	yellow diffused	1	5	110°	
WP1553GDT	GaP	568	green diffused	1	5	110°	
WP503HDT	GaP	660	red diffused	0.4	1	110°	5mm x 5mm Square
WP503IDT	GaAsP/GaP	625	red diffused	3	6	110°	
WP503YDT	GaAsP/GaP	588	yellow diffused	1	3	110°	
WP503GDT	GaP	568	green diffused	1	3	110°	
DLA/6ID DLC/6ID	GaAsP/GaP	625	red diffused	12	50	120°	20mm <p>ORIENTATION MARK</p> <p>DLA/6 1 3 5 7 9 11 2 4 6 8 10 12</p> <p>DLC/6 1 3 5 7 9 11 2 4 6 8 10 12</p>
DLA/6SRD DLC/6SRD	GaAlAs	640	red diffused	*110	*400	120°	
DLA/6YD DLC/6YD	GaAsP/GaP	588	yellow diffused	12	50	120°	
DLA/6GD DLC/6GD	GaP	568	green diffused	18	80	120°	
DLA/6SGD DLC/6SGD	GaP	568	green diffused	*70	*200	120°	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

WP7104




WP7113




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP7104SRC/D	GaAlAs	640	water clear	480	600	34°
WP7104SRC/E	GaAlAs	640	water clear	650	800	34°
WP7104SRD/D	GaAlAs	640	red diffused	110	150	40°
WP7104SRD/E	GaAlAs	640	red diffused	180	250	40°
WP7104SRD/F	GaAlAs	640	red diffused	280	350	40°
WP7104SURC/E	InGaAlP	630	water clear	900	1300	34°
WP7104SEC	InGaAlP	601	water clear	480	1300	34°
WP7104SED	InGaAlP	601	orange diffused	280	800	40°
WP7104SET	InGaAlP	601	orange transparent	480	1300	34°
WP7104SEC/E	InGaAlP	621	water clear	900	2000	34°
WP7104SEC/H	InGaAlP	630	water clear	1800	3500	34°
WP7104SYC	InGaAlP	588	water clear	280	700	34°
WP7104SYT	InGaAlP	588	yellow transparent	280	700	34°
WP7104SYD	InGaAlP	588	yellow diffused	110	250	40°
WP7104SYC/H	InGaAlP	589	water clear	480	900	34°
WP7104SGC	GaP	568	water clear	70	150	34°
WP7104SGD	GaP	568	green diffused	18	40	40°
WP7104CGCK	InGaAlP	570	water clear	110	350	34°
WP7104VGC/E	InGaN	525	water clear	1500	2000	34°
WP7104PBC	InGaN	470	water clear	180	450	20°
WP7104PBD	InGaN	470	blue diffused	70	200	30°
WP7104PBC/A	InGaN	465	water clear	900	1600	20°
WP7104PBC/E	InGaN	470	water clear	280	550	20°
WP7104PBC/H	InGaN	470	water clear	1200	2000	20°

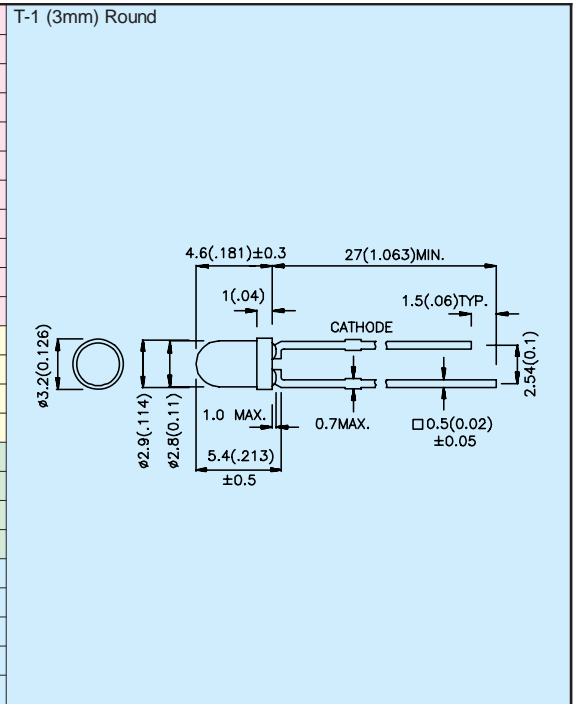


WP7113SRC/DU	GaAlAs	640	water clear	900	1100	20°
WP7113SRC/DV	GaAlAs	640	water clear	1200	1400	20°
WP7113SRC/DW	GaAlAs	640	water clear	1500	1700	20°
WP7113SRD/D	GaAlAs	640	red diffused	180	250	30°
WP7113SRD/E	GaAlAs	640	red diffused	280	400	30°
WP7113SRD/F	GaAlAs	640	red diffused	480	600	30°
WP7113SURC	InGaAlP	628	water clear	1200	1400	20°
WP7113SURC/E	InGaAlP	630	water clear	1500	2200	20°
WP7113SEC	InGaAlP	601	water clear	650	2500	20°
WP7113SET	InGaAlP	601	orange transparent	650	2500	20°
WP7113SED	InGaAlP	601	orange diffused	380	800	30°
WP7113SEC/E	InGaAlP	621	water clear	1500	5000	20°
WP7113SEC/H	InGaAlP	630	water clear	3800	10000	20°
WP7113SYC	InGaAlP	588	water clear	650	2000	20°
WP7113SYT	InGaAlP	588	yellow transparent	650	2000	20°
WP7113SYD	InGaAlP	588	yellow diffused	110	400	30°
WP7113SYC/H	InGaAlP	589	water clear	1500	4500	20°
WP7113SGC	GaP	568	water clear	70	200	20°
WP7113SGD	GaP	568	green diffused	18	40	30°
WP7113CGCK	InGaAlP	570	water clear	380	900	20°
WP7113VGC/E	InGaN	525	water clear	1800	3000	20°
WP7113VGC/H	InGaN	525	water clear	7500	18000	20°
WP7113PBD	InGaN	470	blue diffused	70	400	20°
WP7113PBT	InGaN	470	blue transparent	280	450	16°
WP7113PBC	InGaN	470	water clear	280	1000	16°
WP7113PBC/A	InGaN	465	water clear	900	1800	16°
WP7113PBC/E	InGaN	470	water clear	650	1200	16°
WP7113PBC/H	InGaN	470	water clear	1500	3200	16°

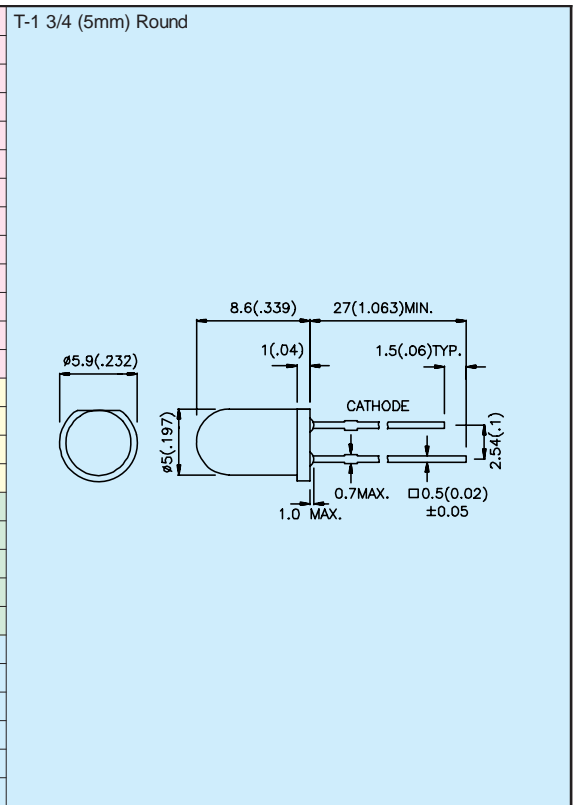

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

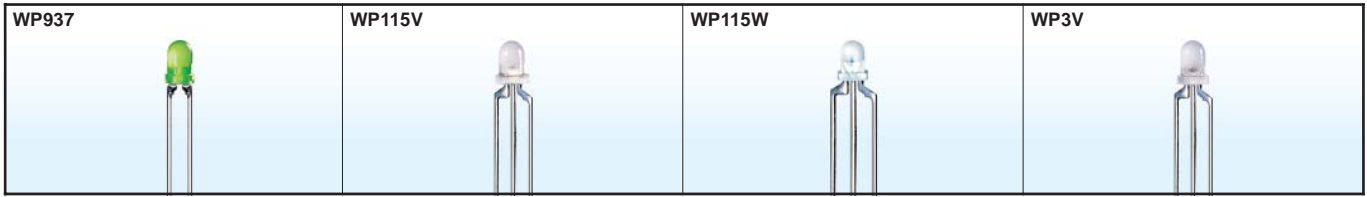

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @ 20mA		Viewing Angle	Dimension
				Min.	Typ.		

WP937IID	GaAsP/GaP	625	red diffused	7	20	60°	T-1 (3mm) Round
	GaAsP/GaP	625		7	20		
WP937GGD	GaP	568	green diffused	4	15	60°	
	GaP	568		4	15		
WP937YYD	GaAsP/GaP	588	yellow diffused	4	10	60°	
	GaAsP/GaP	588		4	10		
WP937EGW	GaAsP/GaP	625	white diffused	7	20	60°	
	GaP	568		7	16		
WP937EYW	GaAsP/GaP	625	white diffused	7	20	60°	
	GaAsP/GaP	588		1.6	7		
WP937GYW	GaP	568	white diffused	7	16	60°	
	GaAsP/GaP	588		1.6	7		

WP115VEGW	GaAsP/GaP	625	white diffused	10	50	60°	T-1 (3mm) Round
	GaP	568		10	30		
WP115VEYW	GaAsP/GaP	625	white diffused	10	50	60°	
	GaAsP/GaP	588		7	15		
WP115VGYW	GaP	568	white diffused	10	30	60°	
	GaAsP/GaP	588		7	15		

WP115WEGW	GaAsP/GaP	625	white diffused	10	40	60°	T-1 (3mm) Round
	GaP	568		10	35		
WP115WEYW	GaAsP/GaP	625	white diffused	10	40	60°	
	GaAsP/GaP	588		7	20		
WP115WGYW	GaP	568	white diffused	10	35	60°	
	GaAsP/GaP	588		7	20		

WP3VEGW	GaAsP/GaP	625	white diffused	10	40	60°	T-1 (3mm) Round
	GaP	568		10	35		
WP3VEYW	GaAsP/GaP	625	white diffused	10	40	60°	
	GaAsP/GaP	588		7	15		
WP3VGYW	GaP	568	white diffused	10	35	60°	
	GaAsP/GaP	588		7	15		


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @ 20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


WP57IID	GaAsP/GaP	625	red diffused	7	20	60°
	GaAsP/GaP	625		7	20	
WP57GGD	GaP	568	green diffused	4	10	60°
	GaP	568		4	10	
WP57YYD	GaAsP/GaP	588	yellow diffused	4	10	60°
	GaAsP/GaP	588		4	10	
WP57SRSRD	GaAlAs	640	red diffused	70	150	60°
	GaAlAs	640		70	150	
WP57EGW	GaAsP/GaP	625	white diffused	10	30	60°
	GaP	568		10	20	
WP57EYW	GaAsP/GaP	625	white diffused	10	30	60°
	GaAsP/GaP	588		4	10	
WP57GYW	GaP	568	white diffused	10	20	60°
	GaAsP/GaP	588		4	10	

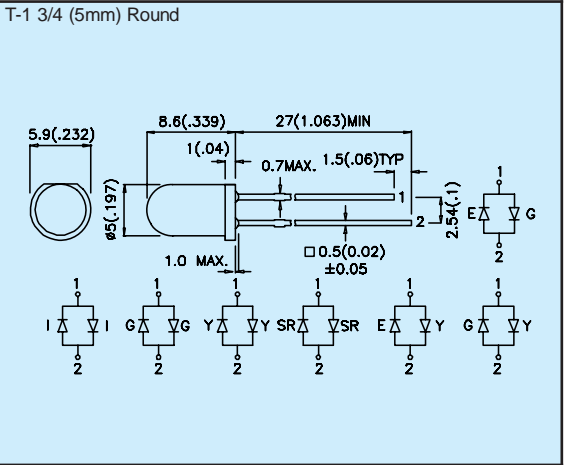

WP59EGW	GaAsP/GaP	625	white diffused	18	60	60°
	GaP	568		18	50	
WP59EGW/CA	GaAsP/GaP	625	white diffused	2.6	5	60°
	GaP	568		1.6	5	
WP59EYW	GaAsP/GaP	625	white diffused	18	60	60°
	GaAsP/GaP	588		18	40	
WP59GYW	GaP	568	white diffused	18	50	60°
	GaAsP/GaP	588		18	40	
WP59SRSGW/CC	GaAlAs	640	white diffused	110	220	60°
	GaP	568		36	60	
WP59SURKMGKW	InGaAlP	635	white diffused	280	700	60°
	InGaAlP	570		50	170	
WP59EGC	GaAsP/GaP	625	water clear	70	150	24°
	GaP	568		70	150	
WP59EYC	GaAsP/GaP	625	water clear	70	150	24°
	GaAsP/GaP	588		18	60	
WP59GYC	GaP	568	water clear	70	150	24°
	GaAsP/GaP	588		18	60	
WP59SRSGC/CC	GaAlAs	640	water clear	280	600	24°
	GaP	568		70	200	
WP59SURKSGC	InGaAlP	635	water clear	480	1100	24°
	GaP	568		70	200	

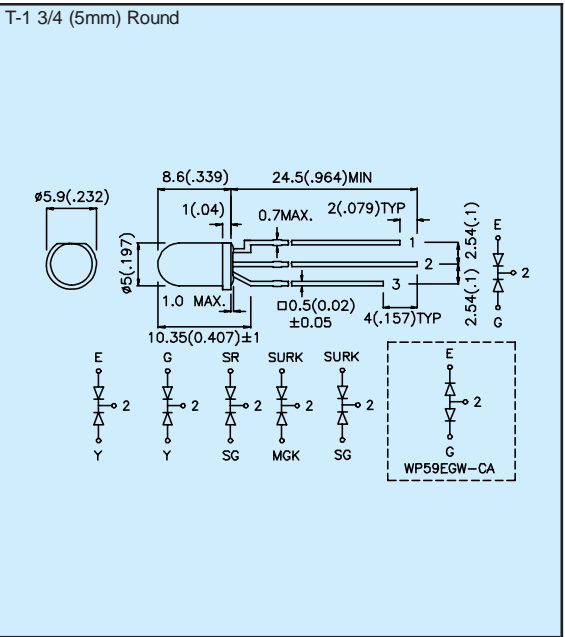

WP799EGW	GaAsP/GaP	625	white diffused	36	80	50°
	GaP	568		18	50	
WP799SRSGW/CC	GaAlAs	640	white diffused	110	200	50°
	GaP	568		18	50	
WP799SURKMGKW	InGaAlP	635	white diffused	380	600	50°
	InGaAlP	570		50	130	

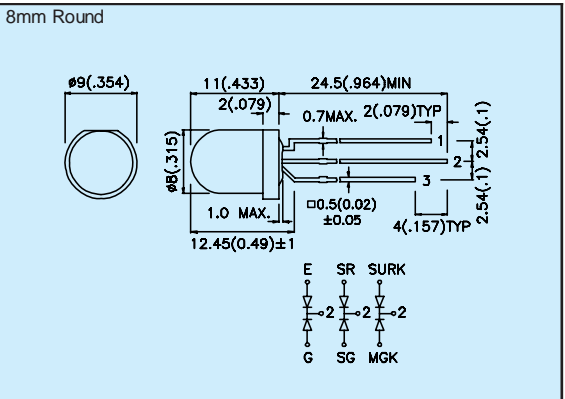

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @ 20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


WP819IID	GaAsP/GaP	625	red diffused	36	80	50°	10mm Round
	GaAsP/GaP	625		36	80		
WP819GGD	GaP	568	green diffused	10	40	50°	
	GaP	568		10	40		
WP819YYD	GaAsP/GaP	588	yellow diffused	10	30	50°	
	GaAsP/GaP	588		10	30		
WP819EGW	GaAsP/GaP	625	white diffused	36	80	50°	
	GaP	568		18	50		
WP819SRSGW/CC	GaAlAs	640	white diffused	110	200	50°	
	GaP	568		36	50		
WP819SURKMGKW	InGaAlP	635	white diffused	380	750	50°	
	InGaAlP	570		50	130		

WP117EGWT	GaAsP/GaP	625	white diffused	4	10	110°	2mm x 5mm Rectangular
	GaP	568		4	8		
WP117EYWT	GaAsP/GaP	625	white diffused	4	10	110°	
	GaAsP/GaP	588		2.6	6		
WP117GYWT	GaP	568	white diffused	4	8	110°	
	GaAsP/GaP	588		2.6	6		

WP119EGWT	GaAsP/GaP	625	white diffused	7	20	110°	2mm x 5mm Rectangular
	GaP	568		4	12		
WP119SRSGWT/CC	GaAlAs	640	white diffused	18	60	110°	
	GaP	568		4	12		
WP119SURKMGKWT	InGaAlP	635	white diffused	70	170	110°	
	InGaAlP	570		10	30		

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

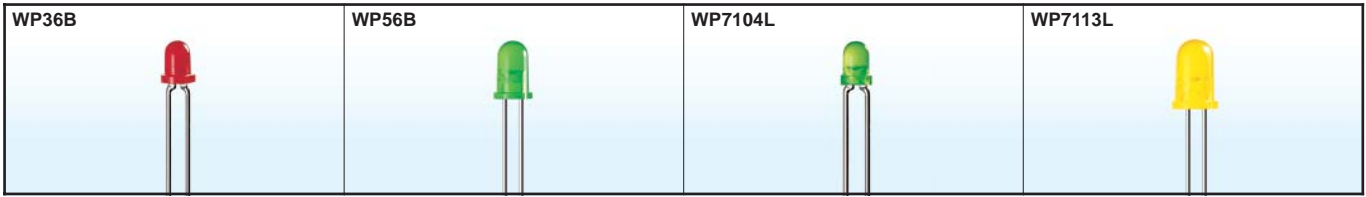

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) V=9V		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP36BHD	GaP	660	red diffused	1	2	60°	T-1 (3mm) Round
WP36BID	GaAsP/GaP	625	red diffused	12	20	60°	
WP36BSRD/B	GaAlAs	640	red diffused	110	200	60°	
WP36BYD	GaAsP/GaP	588	yellow diffused	5	10	60°	
WP36BGD	GaP	568	green diffused	5	15	60°	

WP56BHD	GaP	660	red diffused	1.8	5	60°	T-1 3/4 (5mm) Round
WP56BID	GaAsP/GaP	625	red diffused	18	40	60°	
WP56BSRD/B	GaAlAs	640	red diffused	110	200	60°	
WP56BYD	GaAsP/GaP	588	yellow diffused	5	20	60°	
WP56BGD	GaP	568	green diffused	5	20	60°	

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @ 2mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

WP7104LID	GaAsP/GaP	625	red diffused	0.7	3	40°	T-1 (3mm) Round
WP7104LSRD	GaAlAs	640	red diffused	8	20	40°	
WP7104LYD	GaAsP/GaP	588	yellow diffused	0.7	1.5	40°	
WP7104LGD	GaP	568	green diffused	0.7	2	40°	

WP7113LID	GaAsP/GaP	625	red diffused	0.7	5	30°	T-1 3/4 (5mm) Round
WP7113LSRD	GaAlAs	640	red diffused	8	20	30°	
WP7113LYD	GaAsP/GaP	588	yellow diffused	0.7	2	30°	
WP7113LGD	GaP	568	green diffused	0.7	2	30°	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

WP7104xxx5V/14V



WP7113xxx5V/14V




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) V=5V *V=14V		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		
WP7104ID5V	GaAsP/GaP	625	red diffused	8	20	40°	
WP7104ID14V	GaAsP/GaP	625	red diffused	*8	*20	40°	
WP7104SRD5V	GaAlAs	640	red diffused	70	150	40°	
WP7104SRD14V	GaAlAs	640	red diffused	*28	*90	40°	
WP7104YD5V	GaAsP/GaP	588	yellow diffused	8	15	40°	
WP7104YD14V	GaAsP/GaP	588	yellow diffused	*3	*11	40°	
WP7104GD5V	GaP	568	green diffused	8	20	40°	
WP7104GD14V	GaP	568	green diffused	*8	*20	40°	
WP7104SGD5V	GaP	568	green diffused	8	20	40°	
WP7104SGD14V	GaP	568	green diffused	*8	*20	40°	

WP7113ID5V	GaAsP/GaP	625	red diffused	12	30	30°	
WP7113ID14V	GaAsP/GaP	625	red diffused	*12	*30	30°	
WP7113SRD5V	GaAlAs	640	red diffused	110	180	30°	
WP7113SRD14V	GaAlAs	640	red diffused	*70	*160	30°	
WP7113YD5V	GaAsP/GaP	588	yellow diffused	5	20	30°	
WP7113YD14V	GaAsP/GaP	588	yellow diffused	*5	*16	30°	
WP7113SGD5V	GaP	568	green diffused	8	20	30°	
WP7113SGD14V	GaP	568	green diffused	*5	*18	30°	


VALUE ADDED LED LAMPS

LED lamp with forming/wire leads available

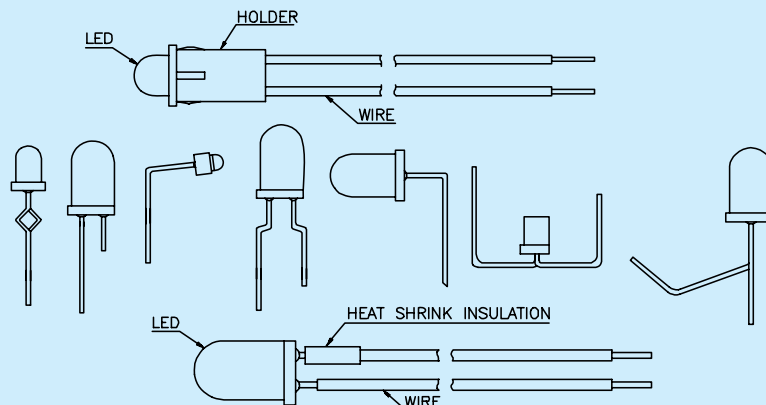

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

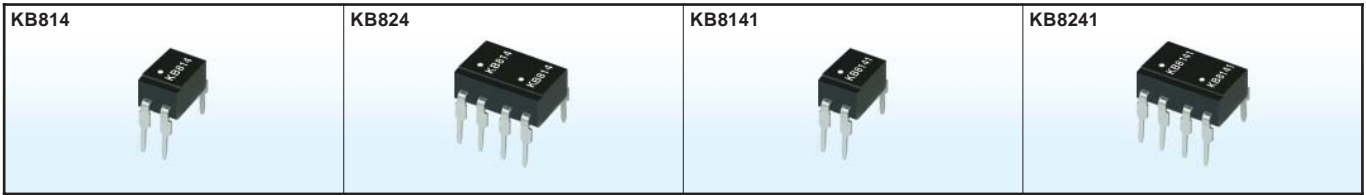


Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=±1mA, VCE=5V	IF=±20mA, IC=1mA	Min.	Max.	Typ.	Max.	

KB814		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage AC input response	5000	35	20	300	0.1	0.2	4	3	1
KB824												2

Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=±1mA, VCE=2V	IF=±20mA, IC=5mA	Min.	Max.	Typ.	Max.	

KB8141		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage High sensitivity AC input response	5000	35	600	7500	0.8	1	60	53	1
KB8241												2

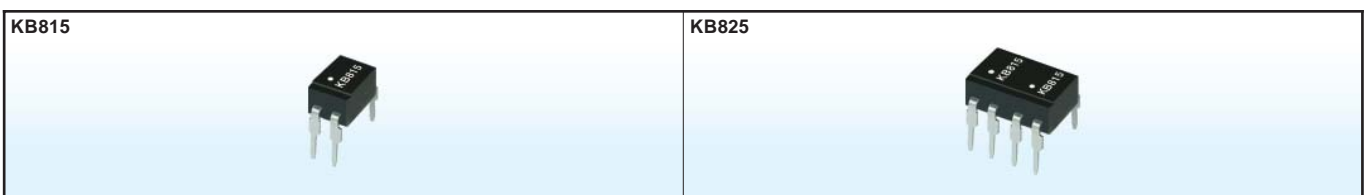


Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=1mA, VCE=2V	IF=20mA, IC=5mA	Min.	Max.	Typ.	Max.	

KB815		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage High sensitivity	5000	35	600	7500	0.8	1	60	53	1
KB825												2




Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=5mA, VCE=5V	IF=20mA, IC=1mA	Min.	Max.	Typ.	Max.	

KB816		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage High collector-emitter voltage	5000	70	50	600	0.1	0.2	4	3	1
KB826												2
KB817		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage	5000	35	50	600	0.1	0.2	4	3	1
KB827												2

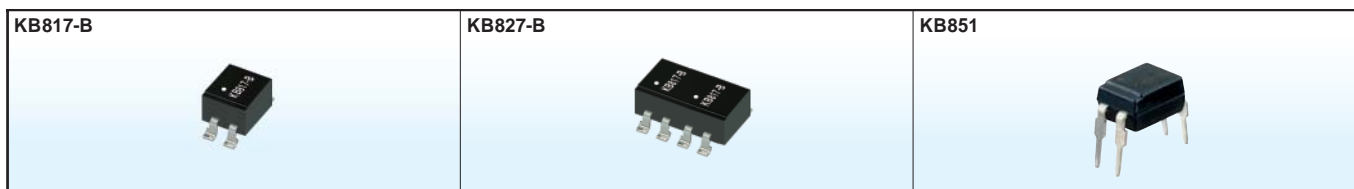

Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=5mA, VCE=5V	IF=20mA, IC=1mA	Min.	Max.	Typ.	Max.	

KB817-B		UL NO.E225308 & VDE0884. NO.40006364	High isolation voltage SMD Type	5000	35	50	600	0.1	0.2	4	3	3
KB827-B												4
KB851		VDE0884. NO.40006364	High collector emitter Voltage	5000	350	-	-	0.1	0.3	4	3	1

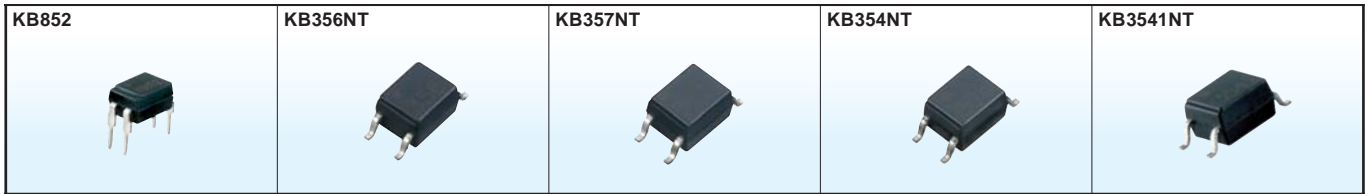

Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEO(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=1mA, VCE=2V		IF=20mA, IC=100mA		VCE=2V, IC=20mA, RL=1000Ω		
						Min.	Max.	Typ.	Max.	tr	tf	

KB852		VDE0884. NO.40006364	High collector-emitter voltage High sensitivity	5000	350	1000	15000	-	1.2	100	20	1
-------	--	-------------------------	----------------------------------------------------	------	-----	------	-------	---	-----	-----	----	---

Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEO(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=5mA, VCE=5V		IF=20mA, IC=1mA		VCE=2V, IC=2mA, RL=100Ω		
						Min.	Max.	Typ.	Max.	tr	tf	

KB356NT		UL NO.E225308	High collector-emitter Voltage Small package size	3750	80	50	600	0.1	0.2	6	8	5
---------	--	------------------	------------------------------------------------------	------	----	----	-----	-----	-----	---	---	---

KB357NT			Small package size	3750	35	50	600	-	0.2	4	3	5
---------	--	--	--------------------	------	----	----	-----	---	-----	---	---	---

Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEO(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=±1mA, VCE=5V		IF=±20mA, IC=1mA		VCE=2V, IC=2mA, RL=100Ω		
						Min.	Max.	Typ.	Max.	tr	tf	

KB354NT		UL NO.E225308	AC input response Small package size	3750	35	20	400	0.1	0.2	4	3	5
---------	--	------------------	-----------------------------------------	------	----	----	-----	-----	-----	---	---	---







Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEO(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=±1mA, VCE=2V		IF=±20mA, IC=1mA		VCE=2V, IC=2mA, RL=100Ω		
						Min.	Max.	Typ.	Max.	tr	tf	

KB3541NT		UL NO.E225308	AC input response High sensitivity Small package size	3750	35	450	7400	0.8	1.0	60	53	5
----------	--	------------------	-------------------------------------------------------------	------	----	-----	------	-----	-----	----	----	---


KBT011



Part No.	Pin Configuration	Safety Standards	Features	Absolute Maximum Ratings		Electrical Characteristics						Fig.
				Isolation Voltage(AC) Viso(Vrms)	Collector Emitter Voltage VCEo(V)	CTR(%)		V(sat) (V)		Response time(μs) Typ.		
						IF=5mA, VCE=5V	IF=20mA, IC=1mA	Min.	Max.	Typ.	Max.	
KBT011		-	PCB Surface mounting type	2000	35	50	300	0.1	0.2	4	3	6

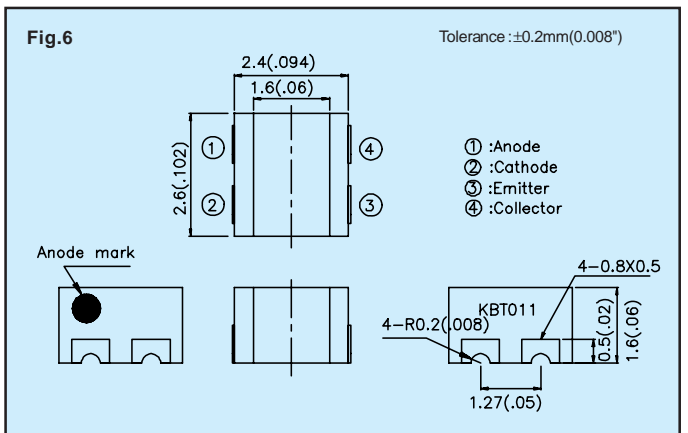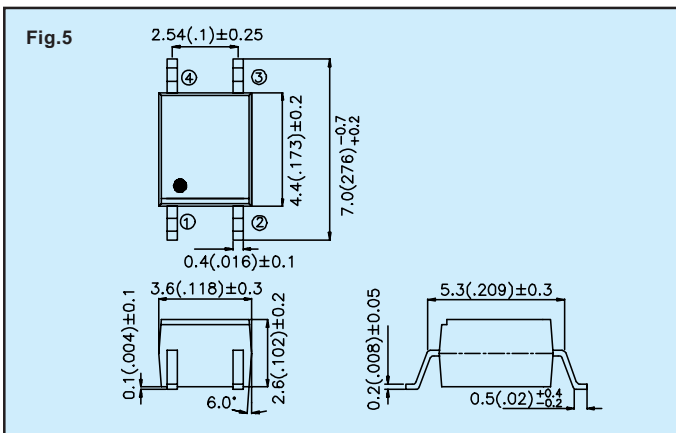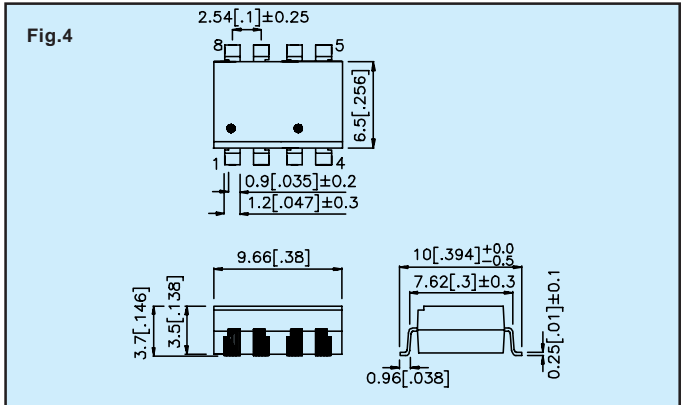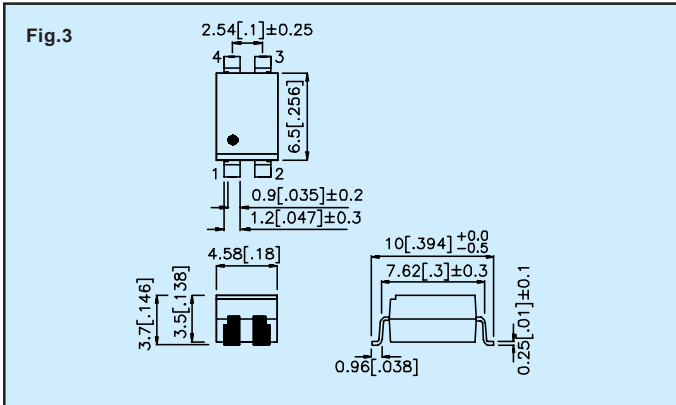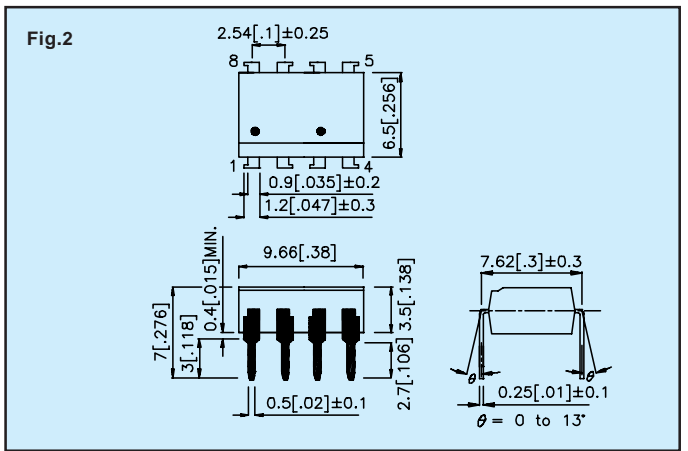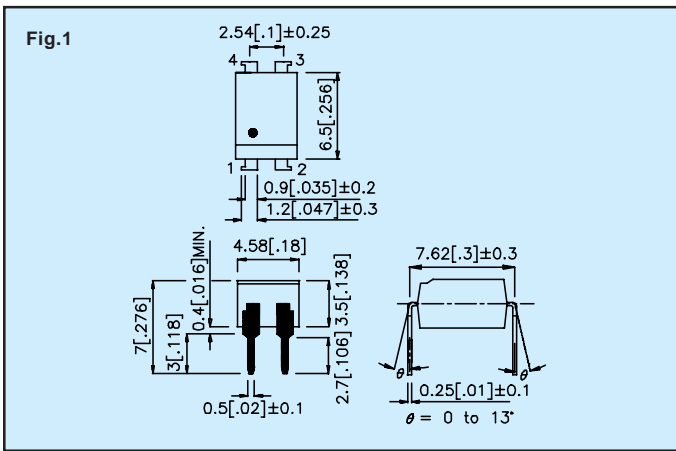

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.5mm(0.02") unless otherwise noted.

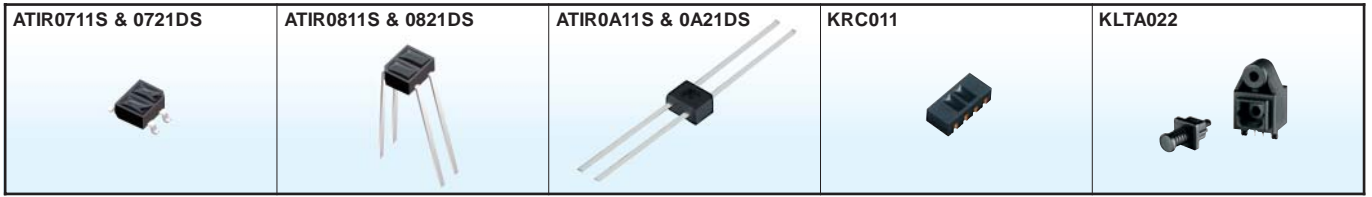

Part No.	Pin Configuration	Material	λP (nm)	I_C (μA)			$V_{CE(SAT)}$			Rise Time (μs) Typ.	Fall Time (μs) Typ.	Fig.
				$V_{CE}=2V, I_F=4mA$			IF(mA)	IC(mA)	Max.(V)			
				Min.	Typ.	Max.						

ATIR0711S		GaAs/SiC	940	10	-	400	-	-	-	20	20	1
ATIR0721DS		GaAs/SiC	940	-	3000	-	-	-	-	80	70	
ATIR0811S		GaAs/SiC	940	10	-	400	-	-	-	20	20	2
ATIR0821DS		GaAs/SiC	940	-	3000	-	-	-	-	80	70	
ATIR0A11S		GaAs/SiC	940	10	-	400	-	-	-	20	20	3
ATIR0A21DS		GaAs/SiC	940	-	3000	-	-	-	-	80	70	

Part No.	Pin Configuration	Material	λP (nm)	I_C (μA)			$V_{CE(SAT)}$			Rise Time (μs) Typ.	Fall Time (μs) Typ.	Fig.
				$V_{CE}=5V, I_F=20mA$			IF(mA)	IC(mA)	Max.(V)			
				Min.	Typ.	Max.						

KRC011		GaAs/SiC	940	10	-	300	-	-	-	20	20	4
--------	--	----------	-----	----	---	-----	---	---	---	----	----	---

Part No.	Pin Configuration	λP (nm)			V_{DD} (V)		T (Mbps)	P_c (dBm)			Δt_i (ns)	Fig.
		Min.	Typ.	Max.	Min.	Max.	Max.	Min.	Typ.	Max.	Typ.	

KLTA022		630	660	690	2.7	5.5	13	-21	-17	-15	1	5
---------	--	-----	-----	-----	-----	-----	----	-----	-----	-----	---	---

Fig.1

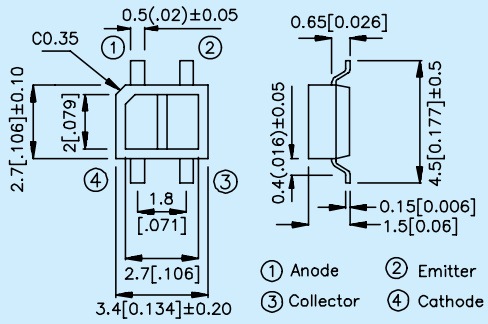


Fig.3

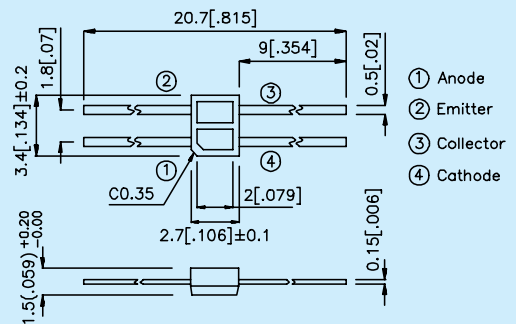


Fig.2

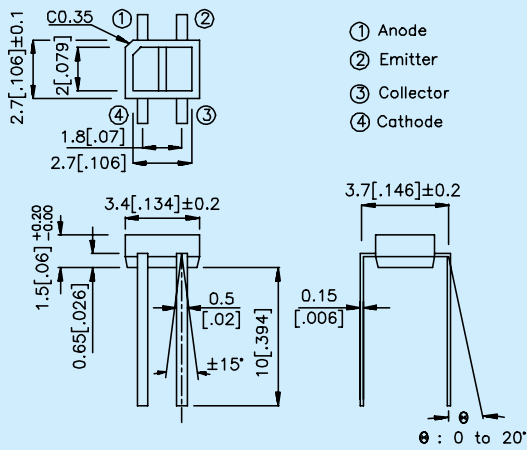


Fig.4



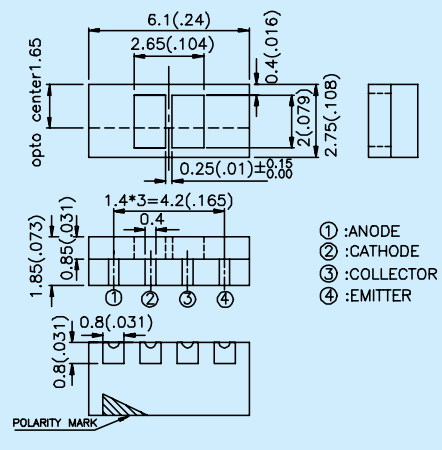


Fig.5

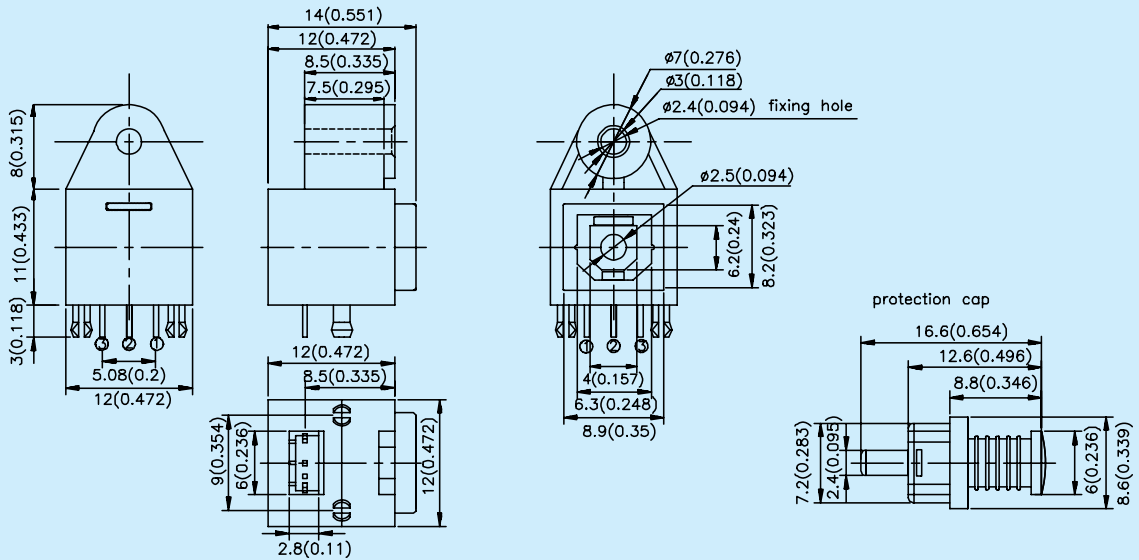


NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

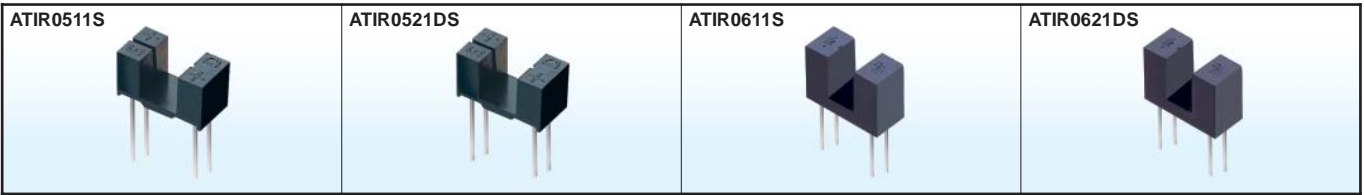


Part No.	Pin Configuration	Material	λ P (nm)	CTR			$V_{CE(SAT)}$			Rise Time (μ s) Typ.	Fall Time (μ s) Typ.	Fig.
				IF(mA)	V_{CE} (V)	Typ.(%)	IF(mA)	IC(mA)	Max.(V)			
ATIR0511S		GaAs/SiC	940	20	5	10	40	1	0.4	5	4	6
ATIR0521DS		GaAs/SiC	940	1	2	180	2	1	1	90	80	7
ATIR0611S		GaAs/SiC	940	20	5	14	40	1	0.4	5	4	8
ATIR0621DS		GaAs/SiC	940	1	2	200	2	1	1	90	80	9

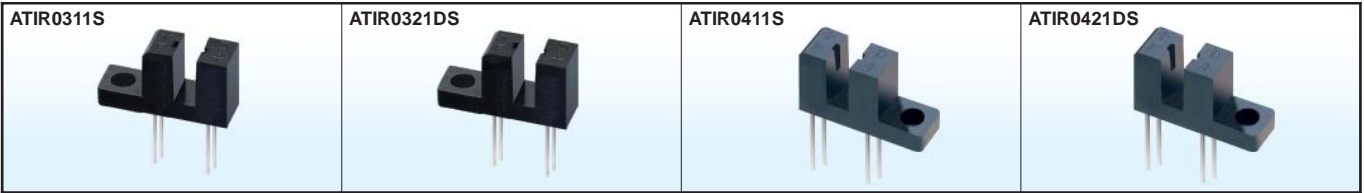

Part No.	Pin Configuration	Material	λ P (nm)	CTR			$V_{CE(SAT)}$			Rise Time (μ s) Typ.	Fall Time (μ s) Typ.	Fig.
				IF(mA)	V_{CE} (V)	Typ.(%)	IF(mA)	IC(mA)	Max.(V)			
ATIR0311S		GaAs/SiC	940	20	5	38	40	1	0.4	5	4	10
ATIR0321DS		GaAs/SiC	940	1	2	650	2	1	1	90	80	11
ATIR0411S		GaAs/SiC	940	20	5	38	40	1	0.4	5	4	12
ATIR0421DS		GaAs/SiC	940	1	2	650	2	1	1	90	80	13



Part No.	Pin Configuration	Material	λ P (nm)	CTR			$V_{CE(SAT)}$			Rise Time (μ s) Typ.	Fall Time (μ s) Typ.	Fig.
				IF(mA)	V_{CE} (V)	Typ.(%)	IF(mA)	IC(mA)	Max.(V)			
ATIR0911S		GaAs/SiC	940	20	5	9.5	40	1	0.4	5	4	14
ATIR0921DS		GaAs/SiC	940	1	2	120	2	1	1	90	80	15
ATIR0121DS		GaAs/SiC	940	1	2	600	2	1	1	90	80	16
ATIR0221DS		GaAs/SiC	940	1	2	600	2	1	1	90	80	17
ATIR0J11S		GaAs/SiC	940	20	10	15	20	0.1	0.4	3	5	18

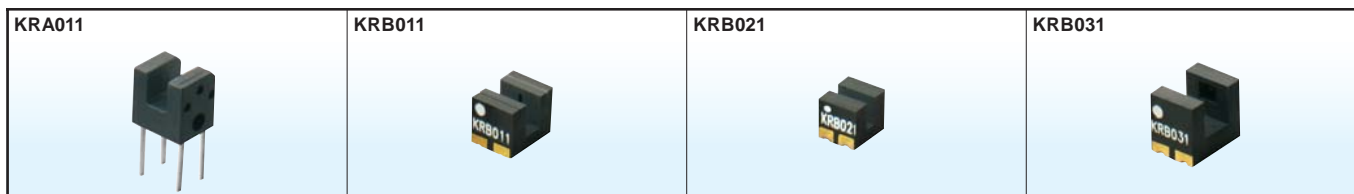

Part No.	Pin Configuration	Material	λ P (nm)	CTR			$V_{CE(SAT)}$			Rise Time (μ s) Typ.	Fall Time (μ s) Typ.	Fig.
				IF(mA)	V_{CE} (V)	Typ.(%)	IF(mA)	IC(mA)	Max.(V)			
KRA011		GaAs/SiC	940	5	5	8	10	0.04	0.4	50	50	19
KRB011		GaAs/SiC	940	5	5	3	20	0.05	0.4	8	10	20
KRB021		GaAs/SiC	940	5	5	3	20	0.05	0.4	8	10	21
KRB031		GaAs/SiC	940	5	5	3	20	0.05	0.4	8	10	22

Fig.6

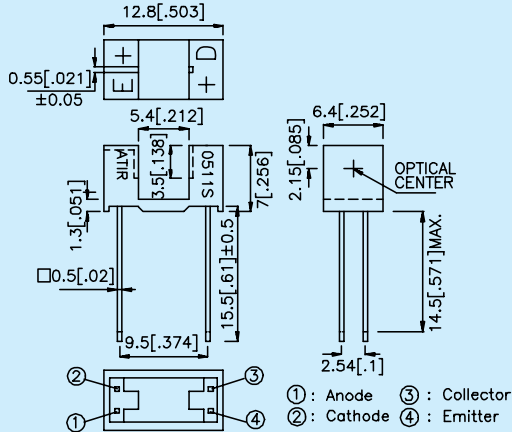


Fig.7

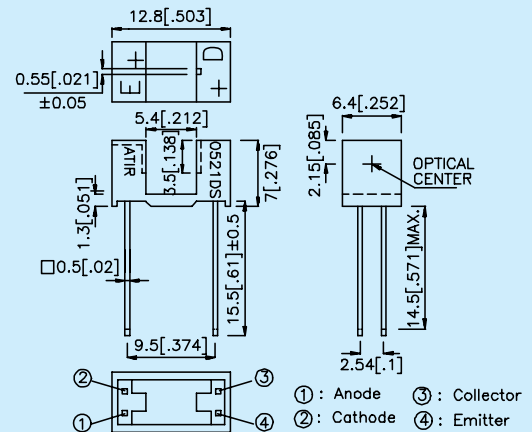


Fig.8

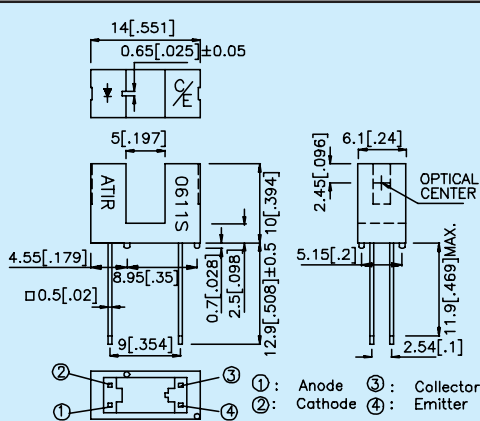


Fig.9

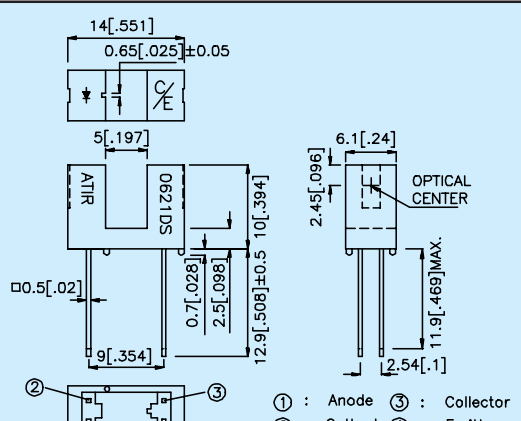


Fig.10

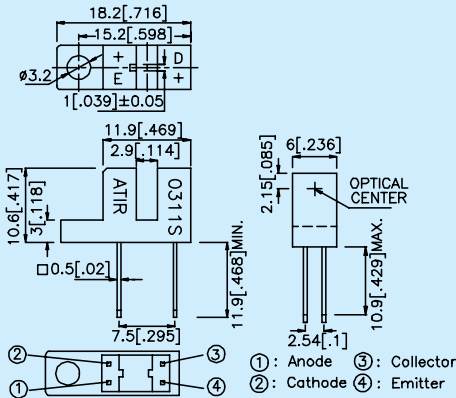


Fig.11

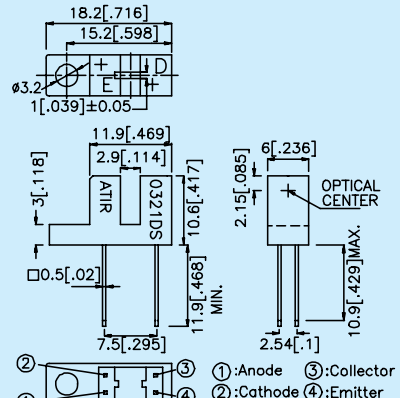


Fig.12











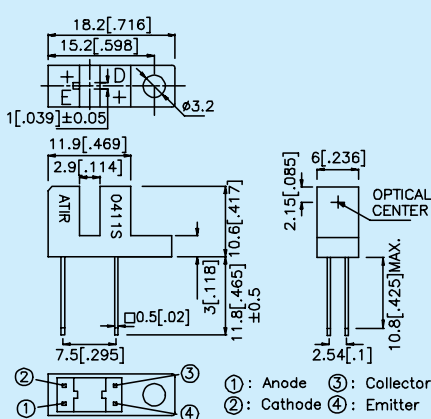


Fig.13

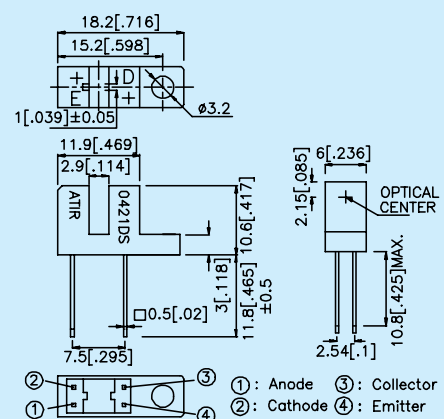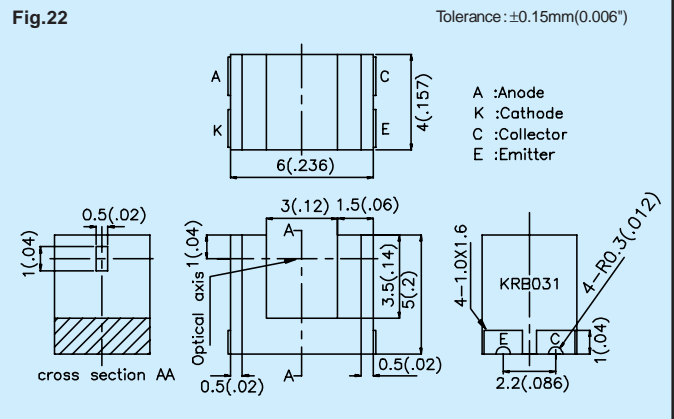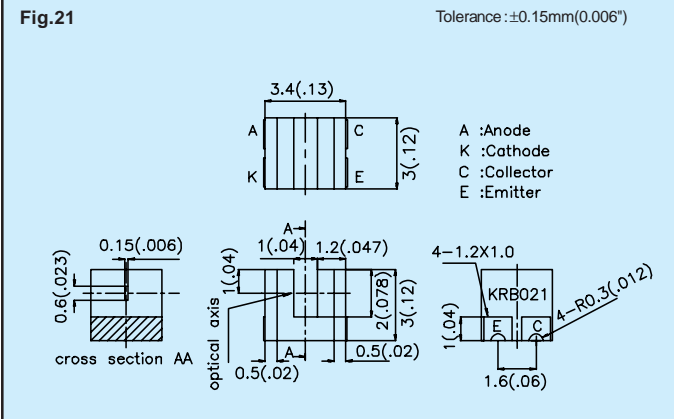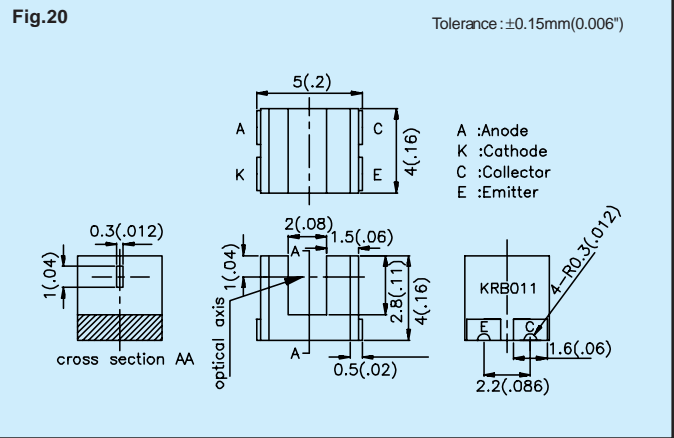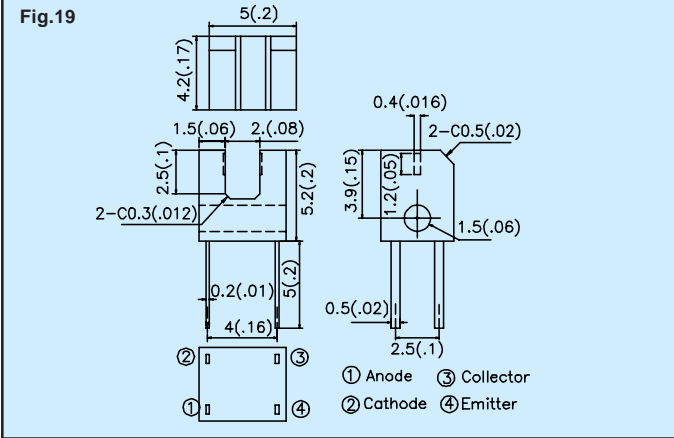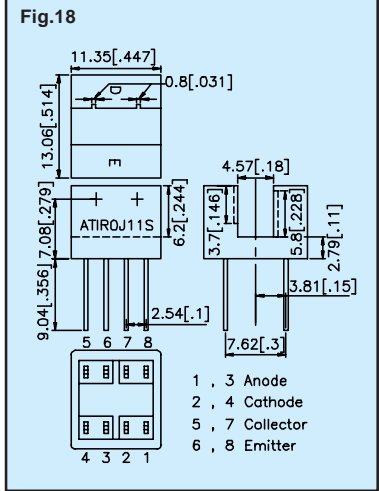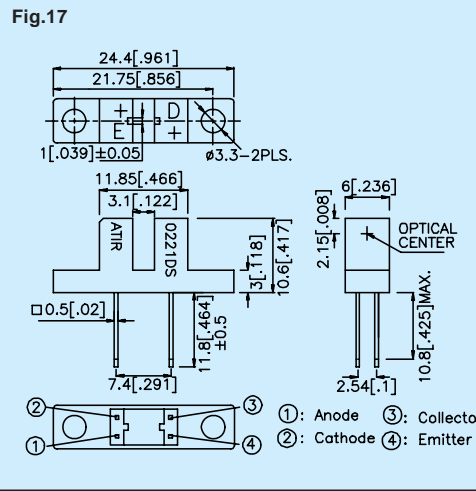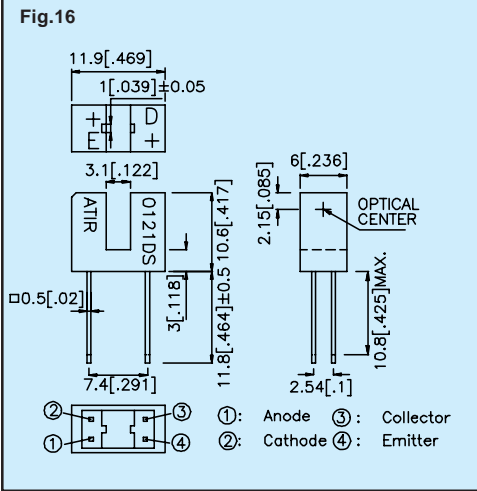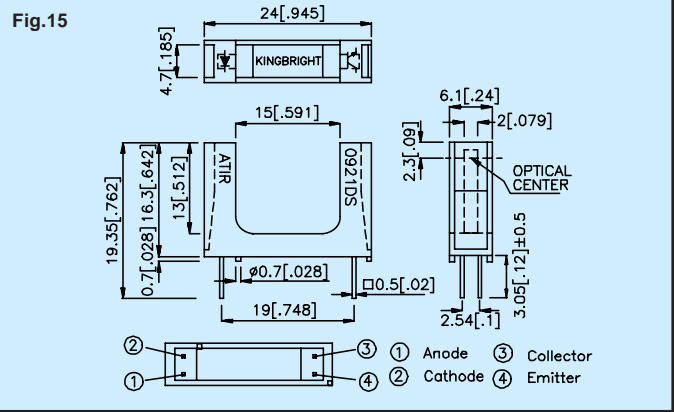


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.

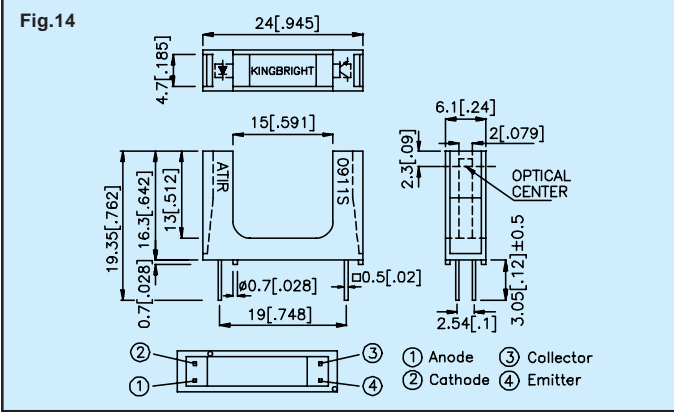

NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

SMD NUMERIC DISPLAYS

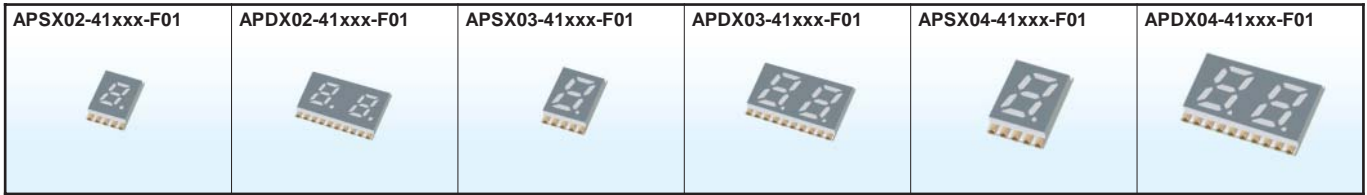

Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	


APSA02-41SURKWA-F01 APDA02-41SURKWA-F01	APSC02-41SURKWA-F01 APDC02-41SURKWA-F01	0.2 inch (5.08mm) Gray Face White Segment	InGaAlP	635	8000	30400	1,2
APSA02-41SEKWA-F01 APDA02-41SEKWA-F01	APSC02-41SEKWA-F01 APDC02-41SEKWA-F01		InGaAlP	601	8000	37200	
APSA02-41SYKWA-F01 APDA02-41SYKWA-F01	APSC02-41SYKWA-F01 APDC02-41SYKWA-F01		InGaAlP	590	8000	34000	
APSA02-41SGWA-F01 APDA02-41SGWA-F01	APSC02-41SGWA-F01 APDC02-41SGWA-F01		GaP	568	1900	10000	
APSA02-41CGKWA-F01 APDA02-41CGKWA-F01	APSC02-41CGKWA-F01 APDC02-41CGKWA-F01		InGaAlP	570	4700	26000	

APSA03-41SRWA-F01 APDA03-41SRWA-F01	APSC03-41SRWA-F01 APDC03-41SRWA-F01	0.3 inch (7.62mm) Gray Face White Segment	GaAlAs	640	1900	7657	3,4
APSA03-41SURKWA-F01 APDA03-41SURKWA-F01	APSC03-41SURKWA-F01 APDC03-41SURKWA-F01		InGaAlP	635	3000	15257	
APSA03-41SEKWA-F01 APDA03-41SEKWA-F01	APSC03-41SEKWA-F01 APDC03-41SEKWA-F01		InGaAlP	601	4700	21371	
APSA03-41SYKWA-F01 APDA03-41SYKWA-F01	APSC03-41SYKWA-F01 APDC03-41SYKWA-F01		InGaAlP	590	8000	35400	
APSA03-41CGKWA-F01 APDA03-41CGKWA-F01	APSC03-41CGKWA-F01 APDC03-41CGKWA-F01		InGaAlP	570	1900	11000	
APSA03-41PBWA-F01 APDA03-41PBWA-F01	APSC03-41PBWA-F01 APDC03-41PBWA-F01		InGaN	470	1900	7400	

APSA04-41SRWA-F01 APDA04-41SRWA-F01	APSC04-41SRWA-F01 APDC04-41SRWA-F01	0.4 inch (10.16mm) Gray Face White Segment	GaAlAs	640	8000	27500	5,6
APSA04-41SURKWA-F01 APDA04-41SURKWA-F01	APSC04-41SURKWA-F01 APDC04-41SURKWA-F01		InGaAlP	635	8000	26000	
APSA04-41SEKWA-F01 APDA04-41SEKWA-F01	APSC04-41SEKWA-F01 APDC04-41SEKWA-F01		InGaAlP	601	12000	41200	
APSA04-41SYKWA-F01 APDA04-41SYKWA-F01	APSC04-41SYKWA-F01 APDC04-41SYKWA-F01		InGaAlP	590	4700	22000	
APSA04-41CGKWA-F01 APDA04-41CGKWA-F01	APSC04-41CGKWA-F01 APDC04-41CGKWA-F01		InGaAlP	570	4700	17400	
APSA04-41PBWA-F01 APDA04-41PBWA-F01	APSC04-41PBWA-F01 APDC04-41PBWA-F01		InGaN	470	3000	12200	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

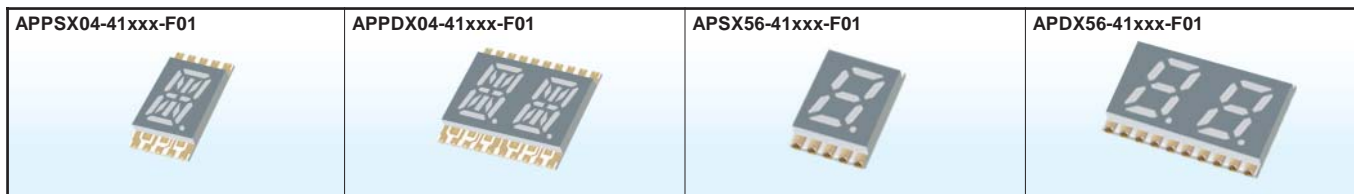

Part No.		Package Description	Material	λ D (nm)	Iv (ucd) @10mA		Package Dimension
Common Anode	Common Cathode				Min.	Typ.	

APPSA04-41SRWA-F01 APPDA04-41SRWA-F01	APPSC04-41SRWA-F01 APPDC04-41SRWA-F01	0.4 inch (10.16mm) Gray Face White Segment	GaAlAs	640	4700	16200	7,8
APPSA04-41SURKWA-F01 APPDA04-41SURKWA-F01	APPSC04-41SURKWA-F01 APPDC04-41SURKWA-F01		InGaAlP	635	4700	22800	
APPSA04-41SEKWA-F01 APPDA04-41SEKWA-F01	APPSC04-41SEKWA-F01 APPDC04-41SEKWA-F01		InGaAlP	601	1900	7800	
APPSA04-41SYKWA-F01 APPDA04-41SYKWA-F01	APPSC04-41SYKWA-F01 APPDC04-41SYKWA-F01		InGaAlP	590	8000	24700	
APPSA04-41CGKWA-F01 APPDA04-41CGKWA-F01	APPSC04-41CGKWA-F01 APPDC04-41CGKWA-F01		InGaAlP	570	3000	11200	
APPSA04-41PBWA-F01 APPDA04-41PBWA-F01	APPSC04-41PBWA-F01 APPDC04-41PBWA-F01		InGaN	470	1900	8300	


APSA56-41SRWA-F01 APDA56-41SRWA-F01	APSC56-41SRWA-F01 APDC56-41SRWA-F01	0.56 inch (14.22mm) Gray Face White Segment	GaAlAs	640	3000	15500	9,10
APSA56-41SURKWA-F01 APDA56-41SURKWA-F01	APSC56-41SURKWA-F01 APDC56-41SURKWA-F01		InGaAlP	635	4700	17700	
APSA56-41SEKWA-F01 APDA56-41SEKWA-F01	APSC56-41SEKWA-F01 APDC56-41SEKWA-F01		InGaAlP	601	12000	40100	
APSA56-41SYKWA-F01 APDA56-41SYKWA-F01	APSC56-41SYKWA-F01 APDC56-41SYKWA-F01		InGaAlP	590	12000	42100	
APSA56-41CGKWA-F01 APDA56-41CGKWA-F01	APSC56-41CGKWA-F01 APDC56-41CGKWA-F01		InGaAlP	570	8000	35500	

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.


APSA/APSC02-41xxx-F01 Series

1



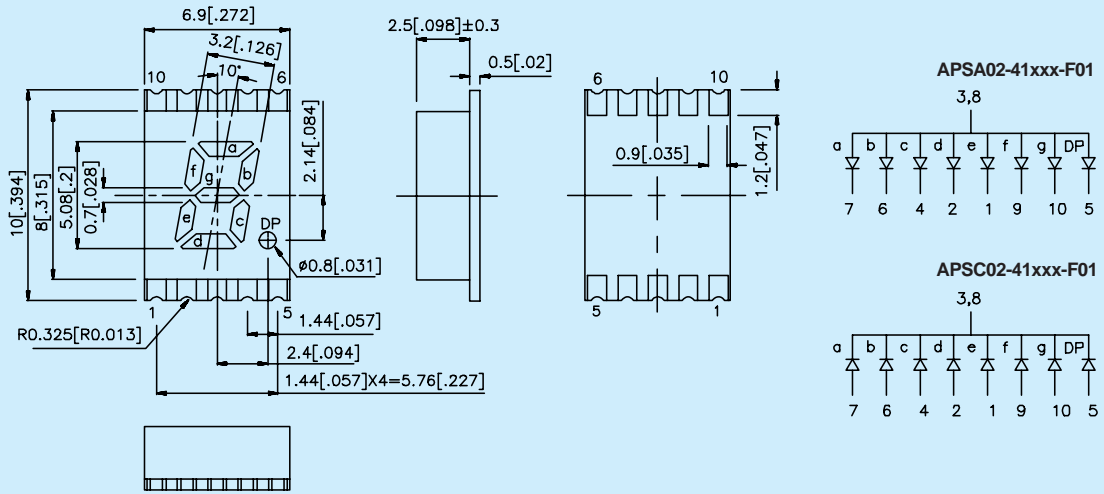


APDA/APDC02-41xxx-F01 Series

2




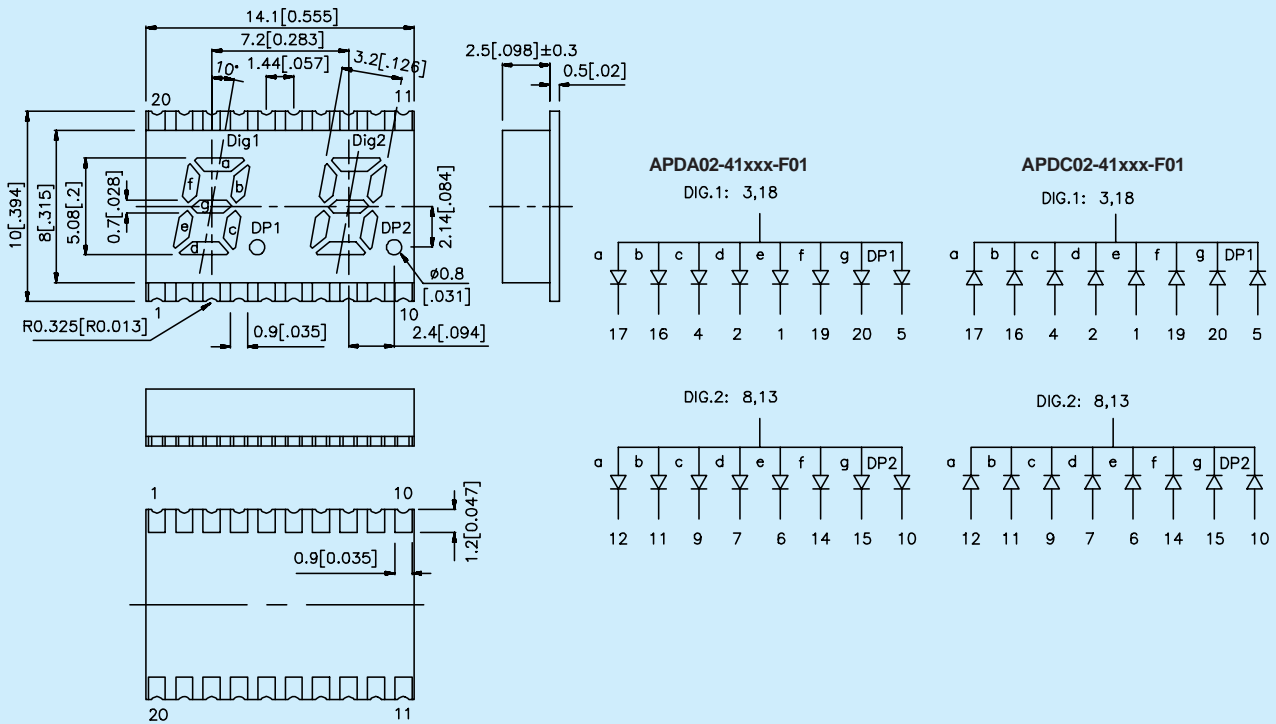


NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

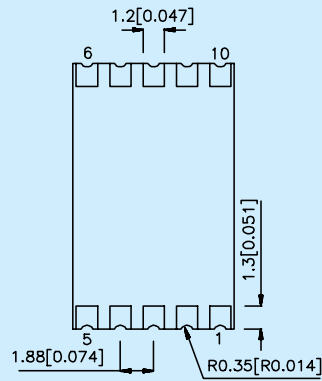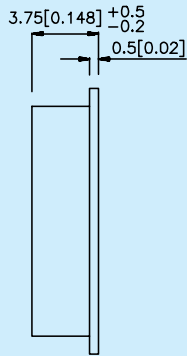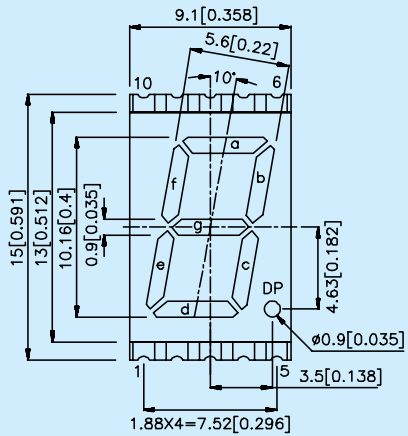


APSA04-41xxx-F01

APSC04-41xxx-F01

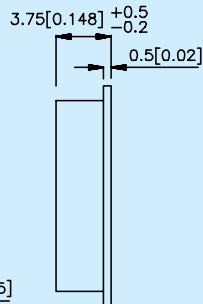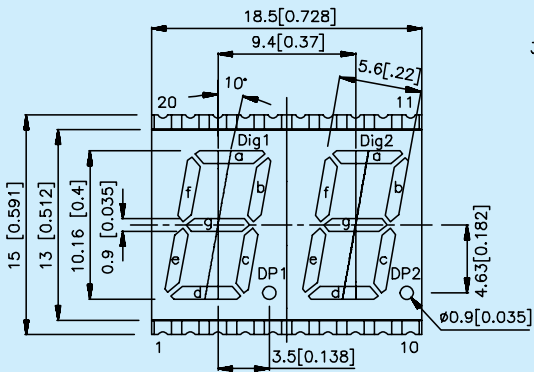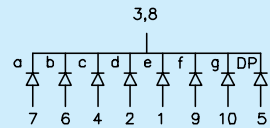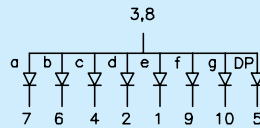


APDA04-41xxx-F01

DIG.1: 3,18

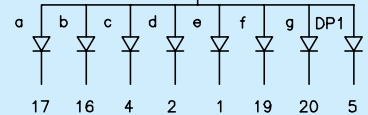


DIG.2: 8,13



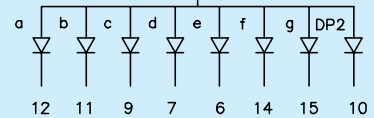


APDC04-41xxx-F01

DIG.1: 3,18

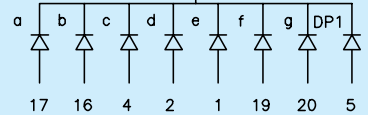



DIG.2: 8,13

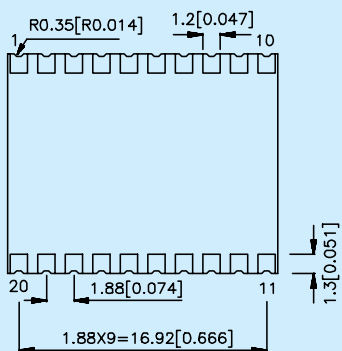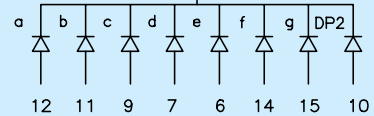


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.


APPSA/APPSC04-41xxx-F01 Series

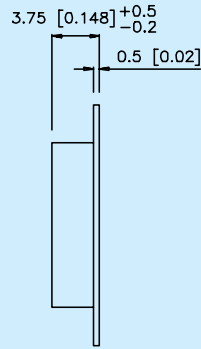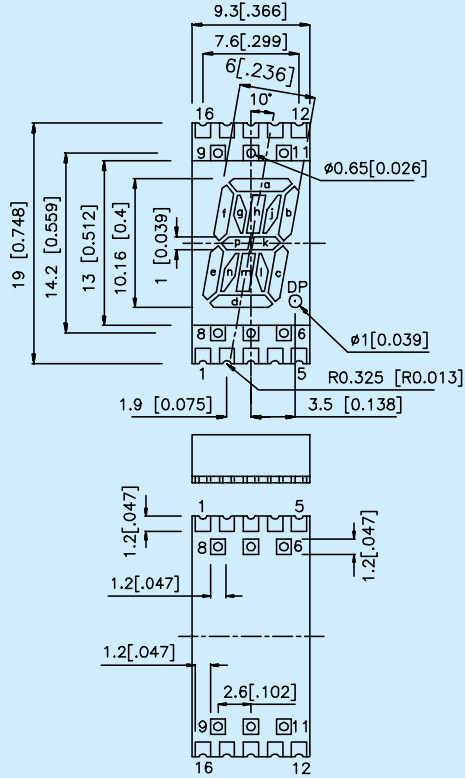



APPSA04-41xxx-F01

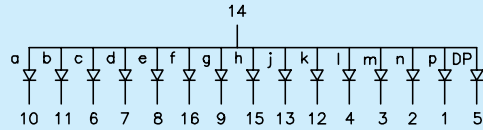


APPSC04-41xxx-F01

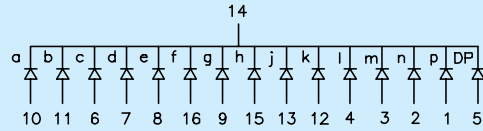


APPDA/APPDC04-41xxx-F01 Series

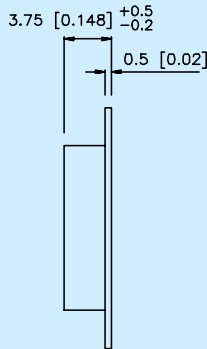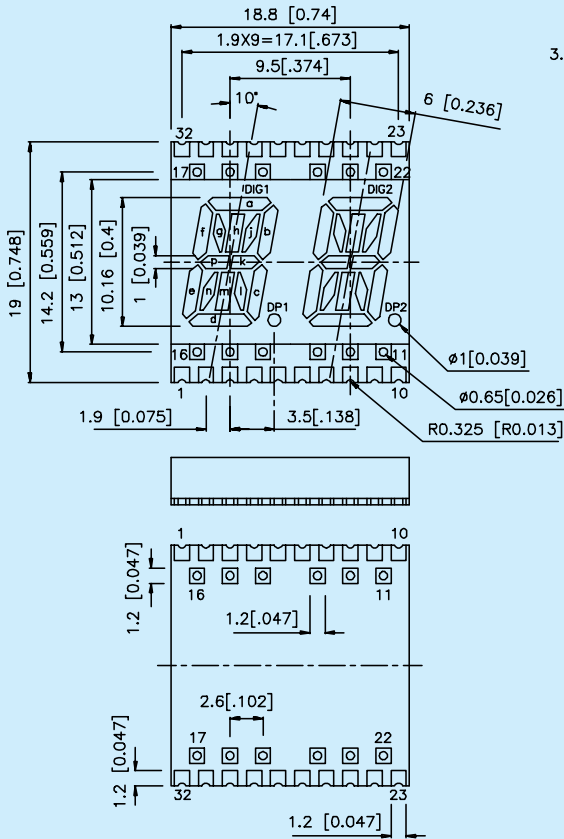

APPDA04-41xxx-F01

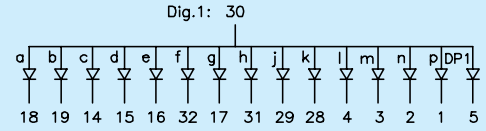

Dig.2: 25




APPDC04-41xxx-F01


Dig.1: 30



Dig.2: 25





- NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.

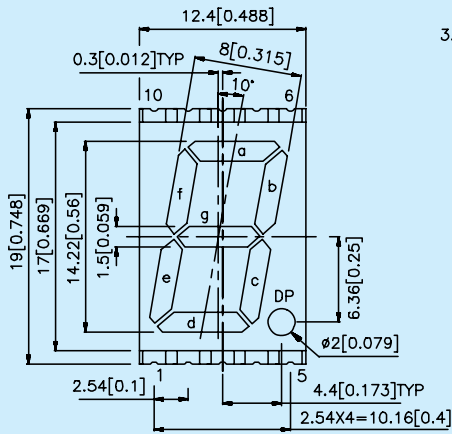

APSA56-41xxx-F01

APSC56-41xxx-F01

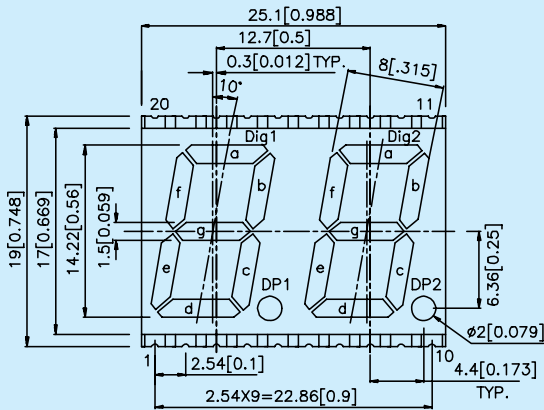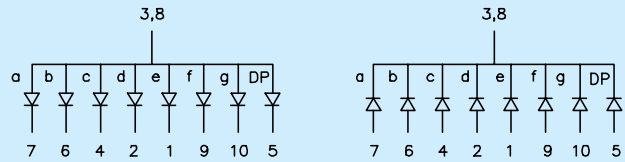


APDA56-41xxx-F01

Dig.1: 3,18



Dig.2: 13,8




APDC56-41xxx-F01

Dig.1: 3,18




Dig.2: 13,8




NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.


WP93A8EWP/xDTG0L PACKAGE: 1000PCS / REEL

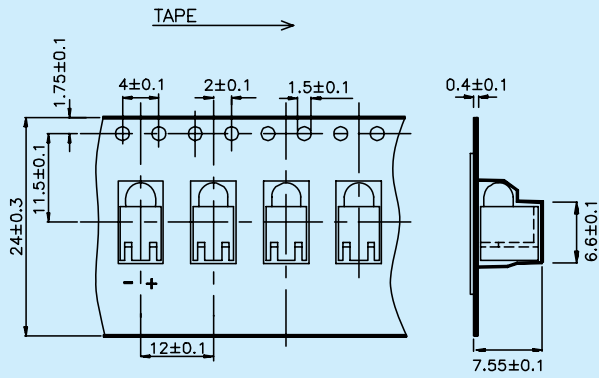


APSX02-41xxx-F01 PACKAGE: 1300PCS / REEL

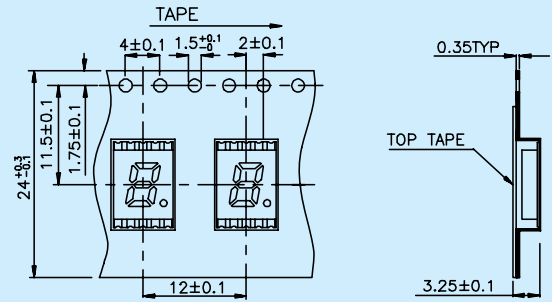


APDX02-41xxx-F01 PACKAGE: 600PCS / REEL

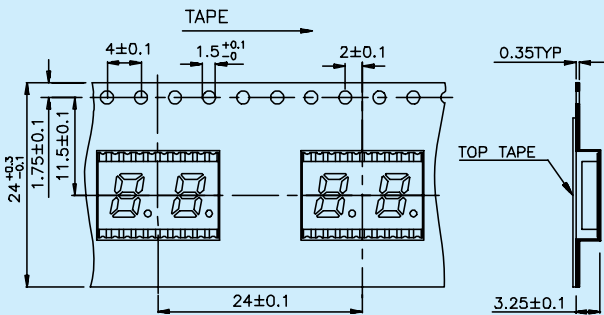


APSX03-41xxx-F01 PACKAGE: 1100PCS / REEL

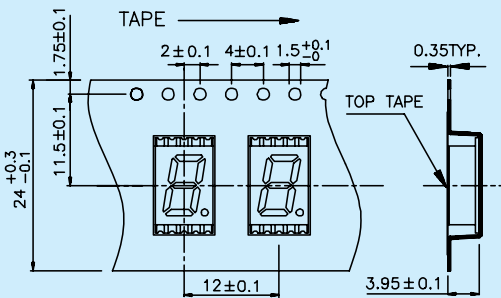


APDX03-41xxx-F01 PACKAGE: 600PCS / REEL

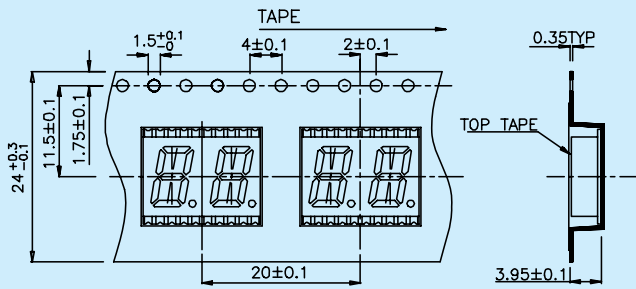


APSX04-41xxx-F01 PACKAGE: 800PCS / REEL

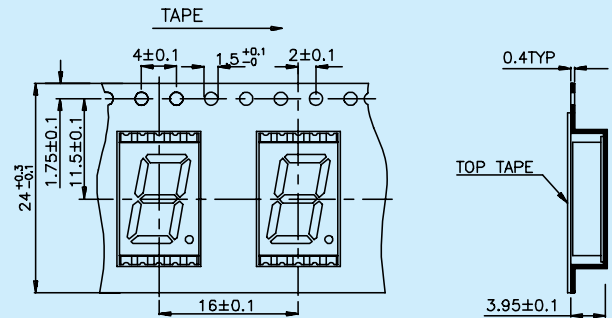

APDX04-41xxx-F01 PACKAGE: 500PCS / REEL

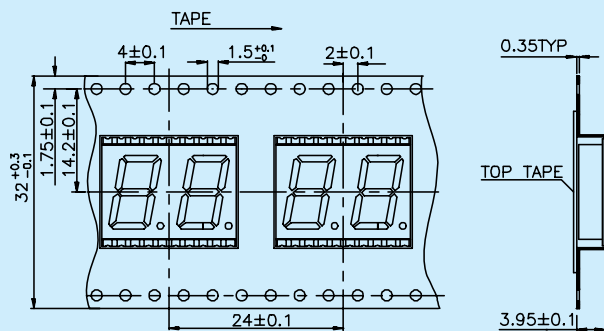


APPSX04-41xxx-F01 PACKAGE: 800PCS / REEL

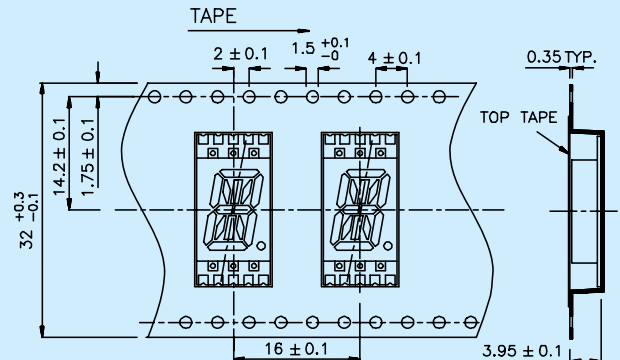


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.


APPDX04-41xxx-F01 PACKAGE: 500PCS / REEL

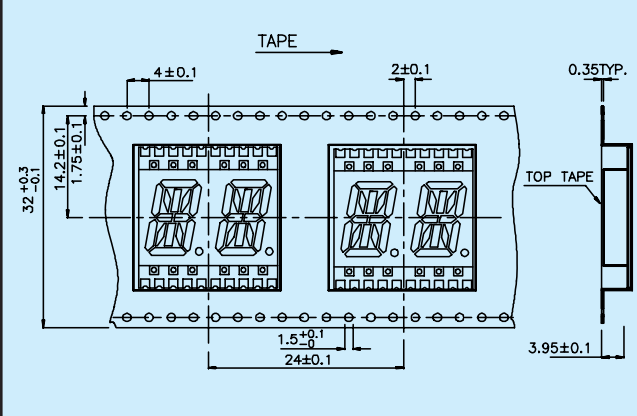

APSX56-41xxx-F01 PACKAGE: 800PCS / REEL

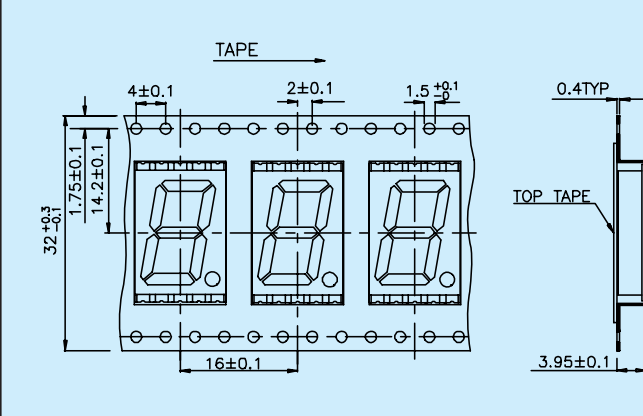

APDX56-41xxx-F01 PACKAGE: 400PCS / REEL

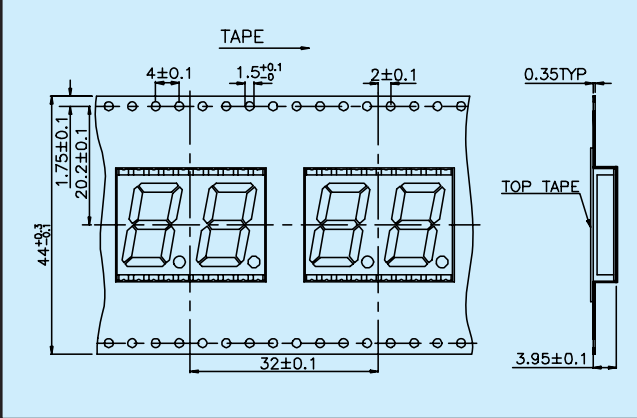


NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01")$ unless otherwise noted.

<p>AM2520xxx03,AM27xxx03</p>	<p>AM2520xxx09,AM27xxx09</p>	<p>WP93A8EWP/xDTG0L</p>
<p>AA5060, AAA5060</p>	<p>AAAF5060</p>	<p>APSX02-41xxx-F01</p>
<p>APDX02-41xxx-F01</p>	<p>APSX03-41xxx-F01</p>	<p>APDX03-41xxx-F01</p>
<p>APSX04-41xxx-F01</p>	<p>APDX04-41xxx-F01</p>	<p>APPSX04-41xxx-F01</p>
<p>APPDX04-41xxx-F01</p>	<p>APSX56-41xxx-F01</p>	<p>APDX56-41xxx-F01</p>

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

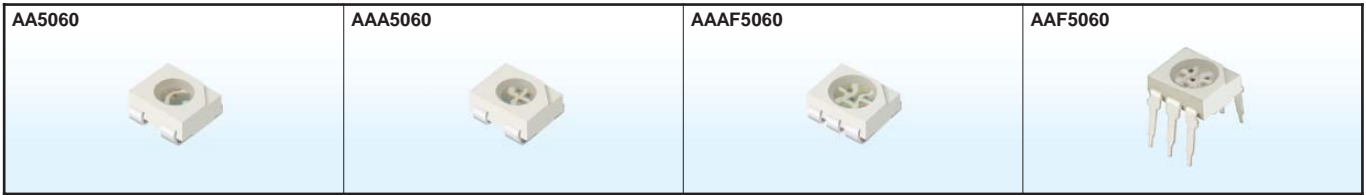

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @30mA*50mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

AA5060SEC/E	InGaAlP	621	water clear	*650	*1000	100°	
AA5060SEC/H	InGaAlP	630	water clear	*1500	*2300	100°	
AA5060SYC/E	InGaAlP	590	water clear	*280	*500	100°	
AA5060SYC/H	InGaAlP	589	water clear	*380	*700	100°	
AA5060VGC	InGaN	525	water clear	180	350	100°	
AA5060PBC/H	InGaN	470	water clear	280	500	100°	


AAA5060SUREVGC	InGaAlP	630	water clear	*380	*700	100°	
	InGaN	525		280	600		
AAA5060SURVGPBEC	InGaAlP	628	water clear	*380	*500	100°	
	InGaN	525		180	350		
AAA5060SEEVGPBEC	InGaAlP	621	water clear	*650	*1000	100°	
	InGaN	525		180	350		
	InGaN	470		110	250		

AAAF5060BESUVGC	InGaN	470	water clear	110	250	100°	
	InGaAlP	628		*380	*500		
	InGaN	525		180	350		

AAF5060PBESEEVG	InGaN	470	water clear	110	250	100°	
	InGaAlP	621		*650	*1000		
	InGaN	525		180	350		
AAF5060PBESURVG	InGaN	470	water clear	110	250	100°	
	InGaAlP	628		*380	*500		
	InGaN	525		180	350		

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

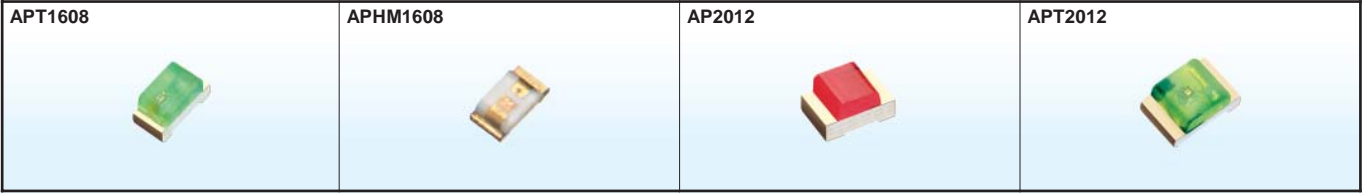

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


APT1608EC	GaAsP/GaP	625	water clear	4	12	120°	<p>1.6mm x 0.8mm x 0.75mm (0603 Super Thin)</p> <p>APT1608SRCPRV</p> <p>Units: mm(inch) Tolerance: ±0.1(0.004)</p>
APT1608SRCPRV	GaAlAs	640	water clear	36	100	120°	
APT1608SURC	InGaAlP	628	water clear	70	200	120°	
APT1608SURCK	InGaAlP	635	water clear	50	150	120°	
APT1608SEC	InGaAlP	601	water clear	70	200	120°	
APT1608SECK	InGaAlP	601	water clear	50	160	120°	
APT1608YC	GaAsP/GaP	588	water clear	2.6	8	120°	
APT1608SYCK	InGaAlP	590	water clear	18	120	120°	
APT1608SGC	GaP	568	water clear	4	15	120°	
APT1608CGCK	InGaAlP	570	water clear	10	40	120°	
APT1608PBC/A	InGaN	465	water clear	36	80	120°	

APHM1608ECT	GaAsP/GaP	625	water clear	7	20	110°	<p>1.6mm x 0.8mm x 0.4mm (0603)</p> <p>APHM1608SGCT</p> <p>Units: mm(inch) Tolerance: ±0.1(0.004)</p>
APHM1608SGCT	GaP	568	water clear	10	25	110°	
APHM1608YCT	GaAsP/GaP	588	water clear	2.6	8	110°	

AP2012EC	GaAsP/GaP	625	water clear	4	12	120°	<p>2.0mm x 1.25mm x 1.1mm (0805)</p> <p>AP2012SRCPRV</p> <p>Units: mm(inch) Tolerance: ±0.1(0.004)</p>
AP2012SRCPRV	GaAlAs	640	water clear	36	100	120°	
AP2012SURCK	InGaAlP	635	water clear	50	150	120°	
AP2012SECK	InGaAlP	601	water clear	50	160	120°	
AP2012YC	GaAsP/GaP	588	water clear	2.6	8	120°	
AP2012SYCK	InGaAlP	590	water clear	18	120	120°	
AP2012SGC	GaP	568	water clear	4	15	120°	
AP2012MGC	InGaAlP	568	water clear	18	70	120°	
AP2012CGCK	InGaAlP	570	water clear	10	40	120°	
AP2012PBC/A	InGaN	465	water clear	36	80	120°	

APT2012EC	GaAsP/GaP	625	water clear	4	12	120°	<p>2.0mm x 1.25mm x 0.75mm (0805 Super Thin)</p> <p>APT2012SRCPRV</p> <p>Units: mm(inch) Tolerance: ±0.1(0.004)</p>
APT2012SRCPRV	GaAlAs	640	water clear	36	100	120°	
APT2012SURC	InGaAlP	628	water clear	70	200	120°	
APT2012SURCK	InGaAlP	635	water clear	50	150	120°	
APT2012SEC	InGaAlP	601	water clear	70	200	120°	
APT2012SECK	InGaAlP	601	water clear	50	160	120°	
APT2012YC	GaAsP/GaP	588	water clear	2.6	8	120°	
APT2012SYCK	InGaAlP	590	water clear	18	120	120°	
APT2012SGC	GaP	568	water clear	4	15	120°	
APT2012CGCK	InGaAlP	570	water clear	10	40	120°	
APT2012PBC/A	InGaN	465	water clear	36	80	120°	

NOTE:
1.AP series custom-made is available upon request.

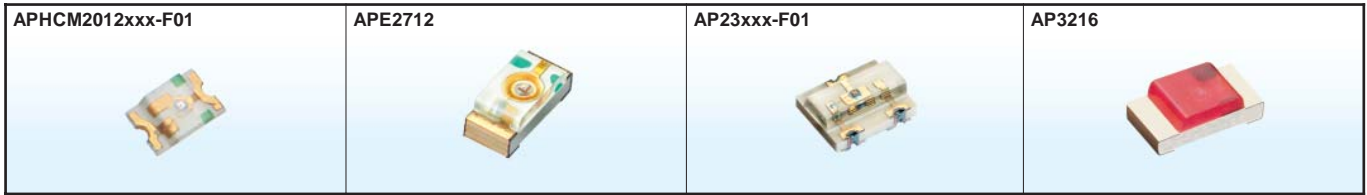

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


APHCM2012SURCK-F01	InGaAlP	635	water clear	50	150	110°	<p>2.0mm x 1.25mm x 0.4mm (0805)</p> <p>Units : mm(inch) Tolerance : ±0.1(0.004)</p>
APHCM2012SECK-F01	InGaAlP	601	water clear	50	160	110°	
APHCM2012SYCK-F01	InGaAlP	590	water clear	18	120	110°	
APHCM2012CGCK-F01	InGaAlP	570	water clear	10	50	110°	

APE2712SURCK	InGaAlP	635	water clear	70	150	120°	<p>2.7mm x 1.2mm x 1.3mm</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APE2712SECK	InGaAlP	601	water clear	70	200	120°	
APE2712SYCK	InGaAlP	590	water clear	36	80	120°	
APE2712CGCK	InGaAlP	570	water clear	10	40	120°	

AP23EC/F-F01	GaAsP/GaP	625	water clear	7	20	120°	<p>3.0mm x 2.4mm x 1.05mm</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
AP23SRC/F-F01	GaAlAs	640	water clear	36	100	120°	
AP23SURCK/F-F01	InGaAlP	635	water clear	50	150	120°	
AP23SECK/F-F01	InGaAlP	601	water clear	50	160	120°	
AP23YC/F-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
AP23SYCK/F-F01	InGaAlP	590	water clear	18	60	120°	
AP23SGC/F-F01	GaP	568	water clear	7	20	120°	
AP23CGCK/F-F01	InGaAlP	570	water clear	18	60	120°	
AP23ESGC-F01	GaAsP/GaP	625	water clear	7	20	120°	
AP23ESGC-F01	GaP	568	water clear	7	20	120°	
AP23YSGC-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
AP23YSGC-F01	GaP	568	water clear	7	20	120°	

AP3216EC	GaAsP/GaP	625	water clear	4	12	120°	<p>3.2mm x 1.6mm x 1.1mm (1206)</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
AP3216SRCPRV	GaAlAs	640	water clear	36	80	120°	
AP3216SURCK	InGaAlP	635	water clear	50	150	120°	
AP3216SECK	InGaAlP	601	water clear	50	160	120°	
AP3216YC	GaAsP/GaP	588	water clear	2.6	8	120°	
AP3216SYCK	InGaAlP	590	water clear	18	120	120°	
AP3216SGC	GaP	568	water clear	4	15	120°	
AP3216MGC	InGaAlP	568	water clear	18	70	120°	
AP3216CGCK	InGaAlP	570	water clear	10	40	120°	
AP3216PBC/A	InGaN	465	water clear	36	80	120°	

NOTE:
1.AP series custom-made is available upon request.

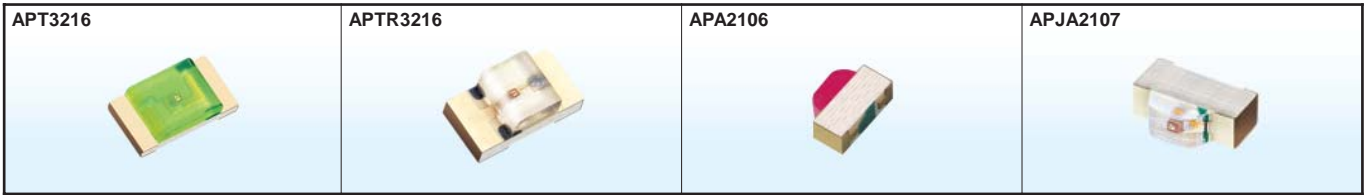

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


APT3216EC	GaAsP/GaP	625	water clear	4	12	120°	3.2mm x 1.6mm x 0.75mm (1206 Super Thin)
APT3216SRCPRV	GaAlAs	640	water clear	36	80	120°	
APT3216SURC	InGaAlP	628	water clear	70	200	120°	
APT3216SURCK	InGaAlP	635	water clear	50	150	120°	
APT3216SEC	InGaAlP	601	water clear	70	200	120°	
APT3216SECK	InGaAlP	601	water clear	50	160	120°	
APT3216YC	GaAsP/GaP	588	water clear	2.6	8	120°	
APT3216SYCK	InGaAlP	590	water clear	18	120	120°	
APT3216SGC	GaP	568	water clear	4	15	120°	
APT3216CGCK	InGaAlP	570	water clear	10	40	120°	
APT3216PBC/A	InGaN	465	water clear	36	80	120°	Units : mm(inch) Tolerance : ±0.2(0.008)

APTR3216EC	GaAsP/GaP	625	water clear	4	12	120°	3.2mm x 1.6mm x 1.05mm (1206 Reverse Mount)
APTR3216SRCPRV	GaAlAs	640	water clear	36	80	120°	
APTR3216SURC	InGaAlP	628	water clear	70	200	120°	
APTR3216SURCK	InGaAlP	635	water clear	50	150	120°	
APTR3216SEC	InGaAlP	601	water clear	70	200	120°	
APTR3216SECK	InGaAlP	601	water clear	50	160	120°	
APTR3216YC	GaAsP/GaP	588	water clear	2.6	8	120°	
APTR3216SYCK	InGaAlP	590	water clear	18	120	120°	
APTR3216SGC	GaP	568	water clear	4	15	120°	
APTR3216CGCK	InGaAlP	570	water clear	10	40	120°	

APA2106EC	GaAsP/GaP	625	water clear	4	15	120°	2.1mm x 0.6mm x 1.0mm (0802 Right Angle) 	
APA2106SRCPRV	GaAlAs	640	water clear	50	100	120°		
APA2106SURCK	InGaAlP	635	water clear	50	150	120°		
APA2106SECK	InGaAlP	601	water clear	50	250	120°		
APA2106YC	GaAsP/GaP	588	water clear	2.6	7	120°		
APA2106SYCK	InGaAlP	590	water clear	18	100	120°		
APA2106SGC	GaP	568	water clear	4	15	120°		
APA2106MGC	InGaAlP	568	water clear	36	80	120°		
APA2106CGCK	InGaAlP	570	water clear	18	60	120°		Units : mm(inch) Tolerance : ±0.1(0.004)

APJA2107EC	GaAsP/GaP	625	water clear	4	15	120°	2.1mm x 0.7mm x 1.3mm (0802 Right Angle)
APJA2107SRCPRV	GaAlAs	640	water clear	50	100	120°	
APJA2107SURCK	InGaAlP	635	water clear	50	150	120°	
APJA2107SECK	InGaAlP	601	water clear	50	250	120°	
APJA2107YC	GaAsP/GaP	588	water clear	2.6	7	120°	
APJA2107SYCK	InGaAlP	590	water clear	18	100	120°	
APJA2107SGC	GaP	568	water clear	4	15	120°	
APJA2107CGCK	InGaAlP	570	water clear	18	60	120°	

NOTE:
1.AP series custom-made is available upon request.

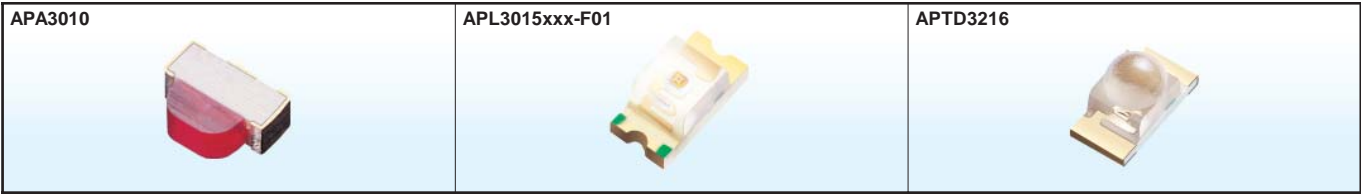


Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APA3010EC	GaAsP/GaP	625	water clear	4	15	120°	<p>Units : mm(inch) Tolerance : ±0.15(0.006)</p>
APA3010SRCPRV	GaAlAs	640	water clear	50	100	120°	
APA3010SURC	InGaAlP	628	water clear	70	200	120°	
APA3010SURCK	InGaAlP	635	water clear	50	150	120°	
APA3010SEC	InGaAlP	601	water clear	70	300	120°	
APA3010SECK	InGaAlP	601	water clear	70	250	120°	
APA3010YC	GaAsP/GaP	588	water clear	2.6	7	120°	
APA3010SYC	InGaAlP	588	water clear	36	120	120°	
APA3010SYCK	InGaAlP	590	water clear	18	100	120°	
APA3010SGC	GaP	568	water clear	4	15	120°	
APA3010MGC	InGaAlP	568	water clear	36	80	120°	
APA3010CGCK	InGaAlP	570	water clear	18	60	120°	

APL3015EC- F01	GaAsP/GaP	625	water clear	4	20	70°	<p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APL3015SRCPRV-F01	GaAlAs	640	water clear	36	80	70°	
APL3015SURC-F01	InGaAlP	628	water clear	110	280	70°	
APL3015SURCK-F01	InGaAlP	635	water clear	70	240	70°	
APL3015SEC-F01	InGaAlP	601	water clear	180	500	70°	
APL3015SECK-F01	InGaAlP	601	water clear	70	300	70°	
APL3015YC-F01	GaAsP/GaP	588	water clear	2.6	10	70°	
APL3015SYCK-F01	InGaAlP	590	water clear	36	100	70°	
APL3015SGC-F01	GaP	568	water clear	4	20	70°	
APL3015CGCK-F01	InGaAlP	570	water clear	36	90	70°	

APTD3216EC	GaAsP/GaP	625	water clear	10	50	40°	<p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APTD3216SRCPRV	GaAlAs	640	water clear	110	300	50°	
APTD3216SURC	InGaAlP	628	water clear	280	600	50°	
APTD3216SURCK	InGaAlP	635	water clear	180	500	50°	
APTD3216SEC	InGaAlP	601	water clear	380	1200	50°	
APTD3216SECK	InGaAlP	601	water clear	280	700	50°	
APTD3216YC	GaAsP/GaP	588	water clear	4	30	40°	
APTD3216SYCK	InGaAlP	590	water clear	70	250	50°	
APTD3216SGC	GaP	568	water clear	10	50	40°	
APTD3216CGCK	InGaAlP	570	water clear	70	200	50°	

NOTE:
1.AP series custom-made is available upon request.

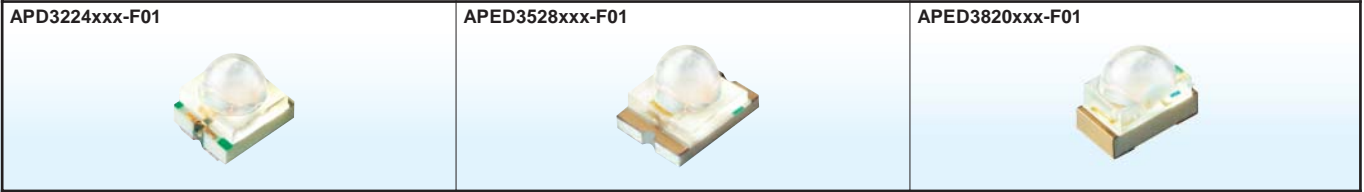

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APD3224EC-F01	GaAsP/GaP	625	water clear	36	70	20°	<p>3.2mm x 2.4mm x 2.4mm (Dome Lens)</p> <p>Units : mm(inch) Tolerance : ±0.1(0.004)</p>
APD3224SURC-F01	InGaAIP	628	water clear	650	1200	20°	
APD3224SURCK-F01	InGaAIP	635	water clear	480	1000	20°	
APD3224SEC-F01	InGaAIP	601	water clear	650	2000	20°	
APD3224SECK-F01	InGaAIP	601	water clear	650	1300	20°	
APD3224YC-F01	GaAsP/GaP	588	water clear	10	40	20°	
APD3224SYCK-F01	InGaAIP	590	water clear	110	600	20°	
APD3224SGC-F01	GaP	568	water clear	18	70	20°	
APD3224MGC-F01	InGaAIP	568	water clear	280	550	20°	
APD3224CGCK-F01	InGaAIP	570	water clear	180	550	20°	
APD3224PBC-F01	InGaN	470	water clear	110	380	20°	

APED3528SRC-F01	GaAlAs	640	water clear	70	200	40°	<p>3.5mm x 2.8mm x 3.2mm</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APED3528SURC-F01	InGaAIP	628	water clear	110	500	40°	
APED3528SEC-F01	InGaAIP	601	water clear	380	700	40°	
APED3528SYCK-F01	InGaAIP	590	water clear	70	200	40°	
APED3528CGCK-F01	InGaAIP	570	water clear	70	170	40°	

APED3820SRC-F01	GaAlAs	640	water clear	110	240	60° (H) 35° (V)	<p>3.8mm x 2.0mm x 3.2mm (Dome Lens)</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APED3820SURC-F01	InGaAIP	628	water clear	180	500	60° (H) 35° (V)	
APED3820SEC-F01	InGaAIP	601	water clear	480	800	60° (H) 35° (V)	
APED3820SYCK-F01	InGaAIP	590	water clear	70	200	60° (H) 35° (V)	
APED3820CGCK-F01	InGaAIP	570	water clear	70	170	60° (H) 35° (V)	

NOTE:
1.AP series custom-made is available upon request.




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		
APD2520EC03	GaAsP/GaP	625	water clear	10	60	20°	4.5mm x 2.0mm x 2.8mm
APD2520SURC03	InGaAlP	628	water clear	280	700	20°	
APD2520SURCK03	InGaAlP	635	water clear	180	650	20°	
APD2520SEC03	InGaAlP	601	water clear	380	1300	20°	
APD2520SECK03	InGaAlP	601	water clear	380	1200	20°	
APD2520YC03	GaAsP/GaP	588	water clear	10	25	20°	
APD2520SYCK03	InGaAlP	590	water clear	70	250	20°	
APD2520SGC03	GaP	568	water clear	36	90	20°	
APD2520CGCK03	InGaAlP	570	water clear	70	300	20°	Units : mm(inch) Tolerance : ±0.2(0.008)

APTB1612ESGC-F01	GaAsP/GaP	625	water clear	4	12	120°	1.6mm x 1.25mm x 0.65mm (0605 Bi-Color)
	GaP	568		4	12		
APTB1612SURKSGC-F01	InGaAlP	635	water clear	70	150	120°	
	GaP	568		4	12		
APTB1612SYKCGKC-F01	InGaAlP	590	water clear	18	50	120°	
	InGaAlP	570		18	50		
APTB1612SGNC-F01	GaP	568	water clear	2.6	12	120°	
	GaAsP/GaP	610		4	12		

APTB1615ESGC-F01	GaAsP/GaP	625	water clear	4	12	120°	1.6mm x 1.5mm x 0.7mm (0606 Bi-Color)
	GaP	568		4	12		
APTB1615EYC-F01	GaAsP/GaP	625	water clear	4	12	120°	
	GaAsP/GaP	588		2.6	8		
APTB1615SURKSGC-F01	InGaAlP	635	water clear	70	150	120°	
	GaP	568		4	12		
APTB1615YSGC-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
	GaP	568		4	12		
APTB1615SYKCGKC-F01	InGaAlP	590	water clear	18	50	120°	
	InGaAlP	570		18	50		
APTB1615SGNC-F01	GaP	568	water clear	4	12	120°	
	GaAsP/GaP	610		4	12		

NOTE:
1.AP series custom-made is available upon request.

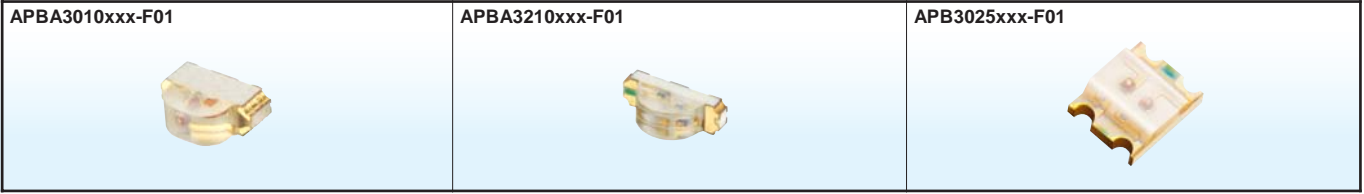

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APBA3010ESGC-F01	GaAsP/GaP	625	water clear	4	12	140°	<p>3.0mm x 1.0mm x 2mm (1104 Right Angle, Bi-Color)</p> <p>Units : mm (inch) Tolerance : ±0.15 (0.006)</p>
	GaP	568		4	12		
APBA3010EYC-F01	GaAsP/GaP	625	water clear	4	12	140°	
	GaAsP/GaP	588		2.6	6		
APBA3010SURKSGC-F01	InGaAlP	635	water clear	110	200	140°	
	GaP	568		4	12		
APBA3010SYKCGKC-F01	InGaAlP	590	water clear	36	120	140°	
	InGaAlP	570		18	50		
APBA3010YSGC-F01	GaAsP/GaP	588	water clear	2.6	6	140°	
	GaP	568		4	12		

APBA3210ESGC-F01	GaAsP/GaP	625	water clear	4	12	120°	<p>3.2mm x 1.0mm x 1.5mm (1304 Right Angle, Bi-Color)</p> <p>Units : mm (inch) Tolerance : ±0.1 (0.004)</p>
	GaP	568		4	12		
APBA3210EYC-F01	GaAsP/GaP	625	water clear	4	12	120°	
	GaAsP/GaP	588		2.6	8		
APBA3210SURKSYKC-F01	InGaAlP	635	water clear	110	200	120°	
	InGaAlP	590		36	80		
APBA3210SURKCGKC-F01	InGaAlP	635	water clear	110	200	120°	
	InGaAlP	570		18	50		
APBA3210YSGC-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
	GaP	568		4	12		
APBA3210SYKCGKC-F01	InGaAlP	590	water clear	36	80	120°	
	InGaAlP	570		18	50		

APB3025ESGC-F01	GaAsP/GaP	625	water clear	4	12	120°	<p>3.0mm x 2.5mm x 1.1mm (1109 Bi-Color)</p> <p>Units : mm (inch) Tolerance : ±0.2 (0.008)</p>
	GaP	568		4	12		
APB3025EYC-F01	GaAsP/GaP	625	water clear	4	12	120°	
	GaAsP/GaP	588		2.6	8		
APB3025NSGC-F01	GaAsP/GaP	610	water clear	4	12	120°	
	GaP	568		4	12		
APB3025SRQGCPRV-F01	GaAlAs	640	water clear	36	100	120°	
	GaP	565		4	12		
APB3025SRSGCPRV-F01	GaAlAs	640	water clear	36	100	120°	
	GaP	568		4	12		
APB3025SURKCGKC-F01	InGaAlP	635	water clear	50	160	120°	
	InGaAlP	570		10	40		
APB3025YSGC-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
	GaP	568		4	12		

NOTE:
1.AP series custom-made is available upon request.




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APBL3025ESGC-F01	GaAsP/GaP	625	water clear	7	20	100°	3.0mm x 2.5mm x 1.4mm (1109 Bi-Color)
	GaP	568		7	20		
APBL3025EYC-F01	GaAsP/GaP	625	water clear	7	20	100°	
	GaAsP/GaP	588		4	15		
APBL3025NSGC-F01	GaAsP/GaP	610	water clear	7	20	100°	
	GaP	568		7	20		
APBL3025SRPGCPR-F01	GaAlAs	640	water clear	36	100	100°	
	GaP	555		2.6	8		
APBL3025SRQGCPR-F01	GaAlAs	640	water clear	36	100	100°	
	GaP	565		7	20		
APBL3025SRSGCPR-F01	GaAlAs	640	water clear	36	100	100°	
	GaP	568		7	20		
APBL3025SURKCGK-F01	InGaAlP	635	water clear	110	300	100°	
	InGaAlP	570		18	80		
APBL3025YSGC-F01	GaAsP/GaP	588	water clear	4	15	100°	
	GaP	568		7	20		

APBD3224ESGC-F01	GaAsP/GaP	625	water clear	18	60	20°	3.2mm x 2.4mm x 2.4mm (Dome Lens)
	GaP	568		10	40		
APBD3224SURKSGC-F01	InGaAlP	635	water clear	70	350	20°	
	GaP	568		10	40		
APBD3224SYKCGKC-F01	InGaAlP	590	water clear	36	150	20°	
	InGaAlP	570		18	120		

APFA3210QBCVGSEKC-F01	GaN	470	water clear	36	70	130°	3.2mm x 1.0mm x 1.5mm (1304 Right Angle, Full Color)
	InGaN	525		50	200		
	InGaAlP	601		70	200		

NOTE:
1.AP series custom-made is available upon request.

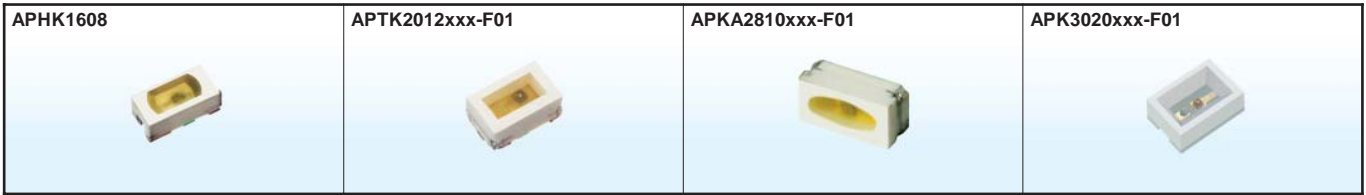

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APHK1608SURC	InGaAlP	628	water clear	110	250	90°	<p>1.6mm x 0.8mm x 0.7mm (0603)</p> <p>Units : mm(inch) Tolerance : ±0.1(0.004)</p>
APHK1608SEC	InGaAlP	601	water clear	110	280	90°	
APHK1608SYC	InGaAlP	588	water clear	50	150	90°	
APHK1608MGCK	InGaAlP	570	water clear	36	80	90°	
APHK1608VGC	InGaN	525	water clear	70	180	90°	
APHK1608PBC	InGaN	470	water clear	36	70	90°	

APTK2012SURCK-F01	InGaAlP	635	water clear	70	200	100°	<p>2.0mm x 1.25mm x 0.75mm (0805)</p> <p>Units : mm(inch) Tolerance : ±0.1(0.004)</p>
APTK2012SYCK-F01	InGaAlP	590	water clear	36	100	100°	
APTK2012CGCK-F01	InGaAlP	570	water clear	18	60	100°	
APTK2012PBC-F01	InGaN	470	water clear	36	70	100°	

APKA2810SURCK-F01	InGaAlP	635	water clear	50	170	90°	<p>2.8mm x 1.0mm x 1.2mm (1104 Right Angle)</p> <p>Units : mm(inch) Tolerance : ±0.25(0.01)</p>
APKA2810SECK-F01	InGaAlP	601	water clear	70	250	90°	
APKA2810SYCK-F01	InGaAlP	590	water clear	36	120	90°	
APKA2810CGCK-F01	InGaAlP	570	water clear	36	60	90°	
APKA2810PBC-F01	InGaN	470	water clear	36	70	90°	

APK3020SURC-F01	InGaAlP	628	water clear	70	230	120°	<p>3.0mm x 2.0mm x 1.3mm(1108)</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APK3020SURCK-F01	InGaAlP	635	water clear	50	200	120°	
APK3020SEC-F01	InGaAlP	601	water clear	110	300	120°	
APK3020SECK-F01	InGaAlP	601	water clear	70	150	120°	
APK3020SYCK-F01	InGaAlP	590	water clear	36	120	120°	
APK3020CGCK-F01	InGaAlP	570	water clear	18	50	120°	

NOTE:
1.AP series custom-made is available upon request.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

APK3216SURCK-F01	InGaAIP	635	water clear	70	200	90°	<p>3.2mm x 1.6mm x 1.1mm(1206)</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
APK3216SECK-F01	InGaAIP	601	water clear	70	250	90°	
APK3216SYCK-F01	InGaAIP	590	water clear	36	120	90°	
APK3216CGCK-F01	InGaAIP	570	water clear	36	80	90°	
APK3216PBC-F01	InGaN	470	water clear	36	70	90°	

APKB3025ESGC-F01	GaAsP/GaP	625	water clear	10	20	120°	<p>3.0mm x 2.5mm x 1.3mm (1109 Bi-Color)</p> <p>Units : mm(inch) Tolerance : ±0.2(0.008)</p>
	GaP	568		10	20		
APKB3025YSGC-F01	GaAsP/GaP	588	water clear	2.6	8	120°	
	GaP	568		10	20		
APKB3025SURKMGK-F01	InGaAIP	635	water clear	70	150	120°	
	InGaAIP	570		10	50		
APKB3025SURKSYK-F01	InGaAIP	635	water clear	70	150	120°	
	InGaAIP	590		18	50		

AA3020EC	GaAsP/GaP	625	water clear	7	20	90°	<p>3.0mm x 2.0mm (1208)</p> <p>Units : mm(inch) Tolerance : ±0.25(0.01)</p>
AA3020SRC	GaAlAs	640	water clear	36	120	90°	
AA3020SURCK	InGaAIP	635	water clear	70	200	90°	
AA3020SEC	InGaAIP	601	water clear	110	300	90°	
AA3020YC	GaAsP/GaP	588	water clear	4	15	90°	
AA3020SYCK	InGaAIP	590	water clear	36	100	90°	
AA3020SGC	GaP	568	water clear	7	30	90°	
AA3020CGCK	InGaAIP	570	water clear	18	60	90°	

NOTE:
1.AP series custom-made is available upon request.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

AA3022EC-4.5SF	GaAsP/GaP	625	water clear	7	30	90°	<p>3.0mm x 2.2mm</p>
AA3022SRC-4.5SF	GaAlAs	640	water clear	36	150	90°	
AA3022SGC-4.5SF	GaP	568	water clear	7	20	90°	

AA3528EC	GaAsP/GaP	625	water clear	7	30	120°	<p>3.5mm x 2.8mm</p>
AA3528SRC	GaAlAs	640	water clear	50	150	120°	
AA3528SURCK	InGaAlP	635	water clear	70	200	120°	
AA3528SECK	InGaAlP	601	water clear	70	300	120°	
AA3528SYCK	InGaAlP	590	water clear	36	100	120°	
AA3528YC	GaAsP/GaP	588	water clear	4	15	120°	
AA3528SGC	GaP	568	water clear	10	25	120°	
AA3528MGC	InGaAlP	568	water clear	70	150	120°	

AA4040SRC	GaAlAs	640	water clear	50	120	90°	<p>4.0mm x 4.0mm Right Angle</p>
AA4040SURC	InGaAlP	628	water clear	70	200	90°	
AA4040YC	GaAsP/GaP	588	water clear	4	9	90°	
AA4040SYC	InGaAlP	588	water clear	50	120	90°	
AA4040SGC	GaP	568	water clear	10	25	90°	
AA4040MGC	InGaAlP	568	water clear	50	100	90°	

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.



Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

AAA3528SURKSYKC	InGaAlP	635	water clear	70	200	120°	3.5mm x 2.8mm
	InGaAlP	590		18	100		
AAA3528SURKCGKC	InGaAlP	635	water clear	70	200	120°	
	InGaAlP	570		18	80		
AAA3528SURKVGPB	InGaAlP	635		70	200	120°	
	InGaN	525	water clear	70	200		
	InGaN	470		36	70		

AM23ID-F	GaAsP/GaP	625	red diffused	4	15	140°	SOT-23 Surface Mount LED Lamp (3mm x 1.3mm)
AM23EC-F	GaAsP/GaP	625	water clear	4	15	140°	
AM23SRD-F	GaAlAs	640	red diffused	36	70	140°	
AM23SRC-F	GaAlAs	640	water clear	36	70	140°	
AM23YD-F	GaAsP/GaP	588	yellow diffused	1.6	5	140°	
AM23YC-F	GaAsP/GaP	588	water clear	1.6	5	140°	
AM23SYD-F	InGaAlP	588	yellow diffused	50	100	140°	
AM23SYC-F	InGaAlP	588	water clear	50	100	140°	
AM23SGD-F	GaP	568	green diffused	2.6	8	140°	
AM23SGC-F	GaP	568	water clear	4	15	140°	
AM23ESGW	GaAsP/GaP	625	white diffused	4	15	140°	
	GaP	568		4	15	140°	
AM23ESGC	GaAsP/GaP	625	water clear	4	15	140°	
	GaP	568		4	15	140°	

AM2520ID03	GaAsP/GaP	625	red diffused	7	30	40°	Subminiature Solid State Lamps Gull Wing Lead
AM2520EC03	GaAsP/GaP	625	water clear	10	70	20°	
AM2520SRC03	GaAlAs	640	water clear	110	600	20°	
AM2520SURC03	InGaAlP	628	water clear	280	1000	20°	
AM2520SEC03	InGaAlP	601	water clear	480	1300	20°	
AM2520YC03	GaAsP/GaP	588	water clear	10	30	20°	
AM2520SYC03	InGaAlP	588	water clear	110	700	20°	
AM2520SGC03	GaP	568	water clear	36	80	20°	
AM2520MGC03	InGaAlP	568	water clear	280	600	20°	
AM2520PBC03	InGaN	470	water clear	110	250	20°	

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.




Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA Min.	Iv (mcd) @20mA Typ.	Viewing Angle 2θ1/2	Dimension
AM2520ID09	GaAsP/GaP	625	red diffused	7	30	40°	<p>Subminiature Solid State Lamps Z-Bend Lead</p>
AM2520EC09	GaAsP/GaP	625	water clear	10	70	20°	
AM2520SRC09	GaAlAs	640	water clear	110	600	20°	
AM2520SURC09	InGaAlP	628	water clear	280	1000	20°	
AM2520SEC09	InGaAlP	601	water clear	480	1300	20°	
AM2520YC09	GaAsP/GaP	588	water clear	10	30	20°	
AM2520SYC09	InGaAlP	588	water clear	110	700	20°	
AM2520SGC09	GaP	568	water clear	36	80	20°	
AM2520MGC09	InGaAlP	568	water clear	280	600	20°	
AM2520PBC09	InGaN	470	water clear	110	250	20°	

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA Min.	Iv (mcd) @20mA Typ.	Viewing Angle 2θ1/2	Dimension
AM27EC03	GaAsP/GaP	625	water clear	10	70	20°	<p>Subminiature Solid State Lamps Gull Wing Lead</p>
AM27SRC03	GaAlAs	640	water clear	110	600	20°	
AM27SURC03	InGaAlP	628	water clear	280	1000	20°	
AM27SEC03	InGaAlP	601	water clear	480	1300	20°	
AM27YC03	GaAsP/GaP	588	water clear	10	30	20°	
AM27SYC03	InGaAlP	588	water clear	110	700	20°	
AM27SGC03	GaP	568	water clear	36	80	20°	
AM27MGC03	InGaAlP	568	water clear	280	600	20°	

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA Min.	Iv (mcd) @20mA Typ.	Viewing Angle 2θ1/2	Dimension
AM27EC09	GaAsP/GaP	625	water clear	10	70	20°	<p>Subminiature Solid State Lamps Z-Bend Lead</p>
AM27SRC09	GaAlAs	640	water clear	110	600	20°	
AM27SURC09	InGaAlP	628	water clear	280	1000	20°	
AM27SEC09	InGaAlP	601	water clear	480	1300	20°	
AM27YC09	GaAsP/GaP	588	water clear	10	30	20°	
AM27SYC09	InGaAlP	588	water clear	110	700	20°	
AM27SGC09	GaP	568	water clear	36	80	20°	
AM27MGC09	InGaAlP	568	water clear	280	600	20°	

NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

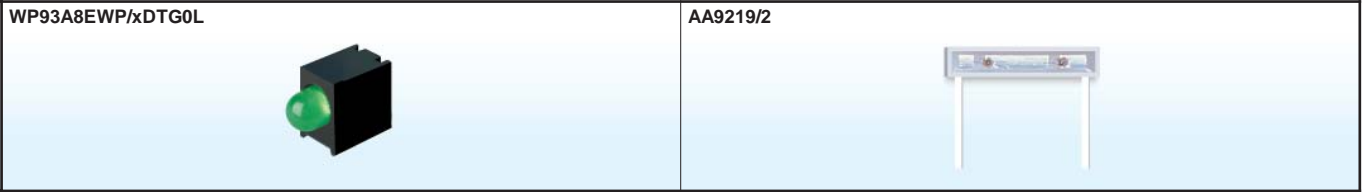

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @10mA		Viewing Angle 2 θ 1/2	Dimension
				Min.	Typ.		
WP93A8EWP/GDTG0L	GaP	568	green diffused	8	20	60°	T-1 (3mm) Right Angle
WP93A8EWP/IDTG0L	GaAsP/GaP	625	red diffused	12	25	60°	
WP93A8EWP/YDTG0L	GaAsP/GaP	588	yellow diffused	5	12	60°	

SIDE VIEW LEDs

Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2 θ 1/2	Dimension
				Min.	Typ.		
AA9219/2EC	GaAsP/GaP	625	water clear	18	50	100°	9.2mm x 1.9mm
AA9219/2SRC	GaAlAs	640	water clear	70	200	100°	
AA9219/2YC	GaAsP/GaP	588	water clear	10	20	100°	
AA9219/2SGC	GaP	568	water clear	7	40	100°	


NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01")$ unless otherwise noted.




Part No.	Material	λ P (nm)	Lens Type	Po (mW/sr) @20mA		Viewing Angle 2 θ 1/2	Dimension
				Min.	Typ.		
AP1608F3C	GaAs	940	water clear	0.4	1.2	120°	1.6mm x 0.8mm x 1.1mm (0603)
AP1608SF4C	GaAlAs	880	water clear	0.4	1	120°	
AP2012F3C	GaAs	940	water clear	0.4	1.2	120°	2.0mm x 1.25mm x 1.1mm (0805)
AP2012SF4C	GaAlAs	880	water clear	0.4	1	120°	
AP3216F3C	GaAs	940	water clear	0.4	1.2	120°	3.2mm x 1.6mm x 1.1mm (1206)
AP3216SF4C	GaAlAs	880	water clear	0.4	1	120°	

NOTES:
1. All dimensions are in millimeters(inches).

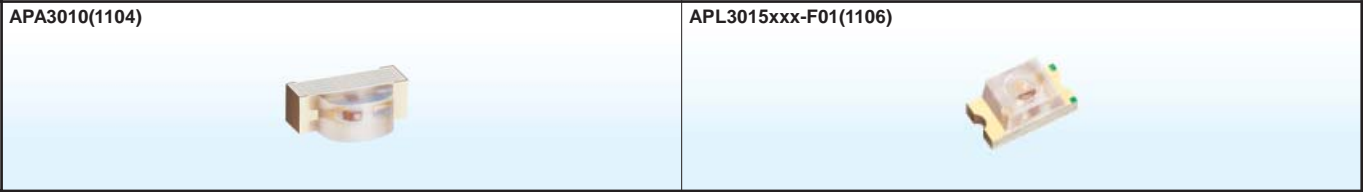

Part No.	Material	λ P (nm)	Lens Type	Po (mW/sr) @20mA		Viewing Angle $2\theta_{1/2}$	Dimension
				Min.	Typ.		
APA3010F3C	GaAs	940	water clear	0.4	1.2	120°	3.0mm x 1.0mm x 2mm (1104 Right Angle)
APA3010SF4C	GaAlAs	880	water clear	0.4	1	120°	
APL3015F3C-F01	GaAs	940	water clear	0.4	1.2	70°	3.0mm x 1.5mm x 1.4mm (1106)
APL3015SF4C-F01	GaAlAs	880	water clear	0.4	1	70°	

NOTES:
1. All dimensions are in millimeters(inches).

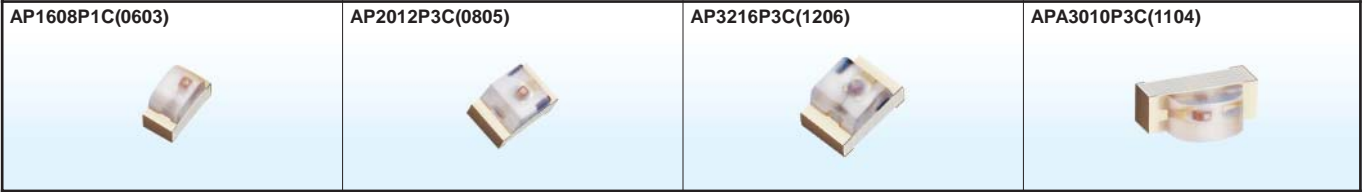

PHOTOTRANSISTORS

1.6mm x 0.8mm x 1.1mm (0603)

- AP1608P1C WATER CLEAR LENS
- AP1608P1BT BLUE TRANSPARENT LENS

2.0mm x 1.25mm x 1.1mm (0805)

- AP2012P3C WATER CLEAR LENS
- AP2012P3BT BLUE TRANSPARENT LENS

3.2mm x 1.6mm x 1.1mm (1206)

- AP3216P3C WATER CLEAR LENS
- AP3216P3BT BLUE TRANSPARENT LENS

3.0mm x 1.0mm x 2.0mm (1104)

- APA3010P3C WATER CLEAR LENS
- APA3010P3BT BLUE TRANSPARENT LENS


ABSOLUTE MAXIMUM RATING $T_A=25^\circ\text{C}$

Parameter	Max. Ratings
Collector-to-Emitter Breakdown Voltage	30V
Emitter-to-Collector Breakdown Voltage	5V
Power Dissipation at (or below) 25°C Free Air Temperature	100mW
Operating Temperature Range	-40°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C


ELECTRICAL AND RADIANT CHARACTERISTICS $T_A=25^\circ\text{C}$

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition
$V_{BR\ CE0}$	Collector-to-Emitter Breakdown Voltage	30	-	-	V	$I_C=100\mu\text{A}$ $E_e=0\text{mW}/\text{cm}^2$
$V_{BR\ EC0}$	Emitter-to-Collector Breakdown Voltage	5	-	-	V	$I_E=100\mu\text{A}$ $E_e=0\text{mW}/\text{cm}^2$
$V_{CE(SAT)}$	Collector-to-Emitter Saturation Voltage	-	-	0.8	V	$I_C=2\text{mA}$ $E_e=20\text{mW}/\text{cm}^2$
I_{CE0}	Collector Dark Current	-	-	100	nA	$V_{CE}=10\text{V}$ $E_e=0\text{mW}/\text{cm}^2$
T_R	Rise Time (10% to 90%)	-	3	-	μs	$V_{CE}=5\text{V}$ $I_C=1\text{mA}$ $R_L=1\text{K}\Omega$
T_F	Fall Time (90% to 10%)	-	3	-	μs	
$I_{(ON)}$	On State Collector Current	0.1	0.3	-	mA	$V_{CE}=5\text{V}$, $E_e=1\text{mW}/\text{cm}^2$, $\lambda=940\text{nm}$


AP1608P1 1.6mm x 0.8mm x 1.1mm (0603)

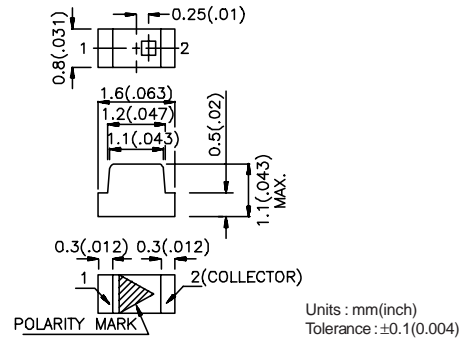


AP2012P3 2.0mm x 1.25mm x 1.1mm (0805)

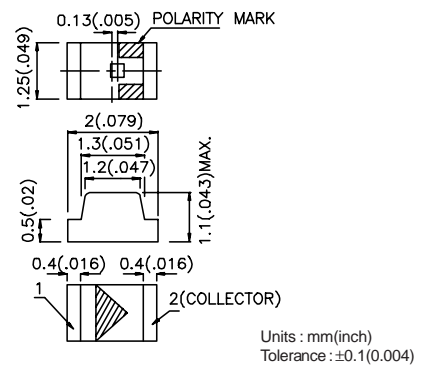


AP3216P3 3.2mm x 1.6mm x 1.1mm (1206)

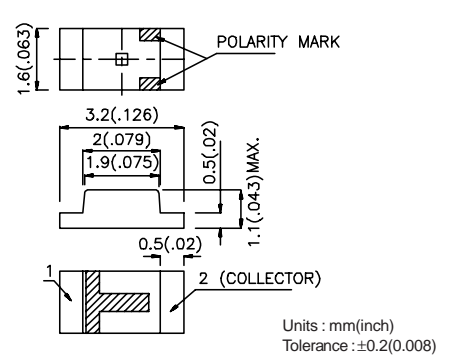

APA3010P3 3.0mm x 1.0mm x 2.0mm (1104)

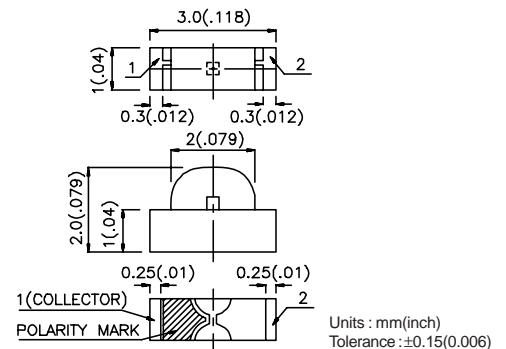


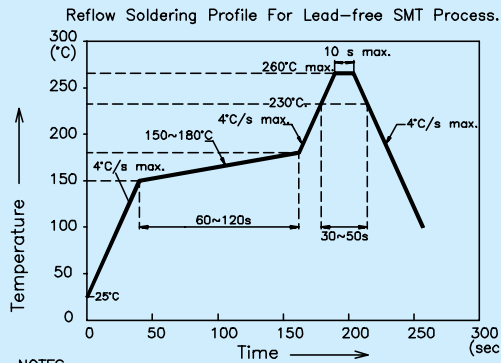


- NOTES:
1. We recommend the reflow temperature 245°C(±5°C). The maximum soldering temperature should be limited to 260°C.
 2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
 3. Number of reflow process shall be 2 times or less.

PART NO.	REEL DIMENSION
AA3020,AM23-F,AP1608,AP2012,AP23xxx-F01,AP3216,APA2106,APA3010,APB3025xxx-F01,APBA3010xxx-F01,APBA3210xxx-F01,APBD3224xxx-F01,APBL3025xxx-F01,APD3224xxx-F01,APE2712,APFA3210xxx-F01,APHCM2012xxx-F01,APHK1608,APHM1608,APHS1005,APJA2107,APK3020xxx-F01,APK3216xxx-F01,APKA2810xxx-F01,APKB3025xxx-F01,APL3015xxx-F01,APT1608,APT2012,APT3216,APTB1612xxx-F01,APTB1615xxx-F01,APTK2012xxx-F01,APTD3216,APTR3216.	7" (for 8mm width tape)
APDX04-41xxx-F01,APPDX04-41xxx-F01,APPSX04-41xxx-F01, APSX56-41xxx-F01.	13" (for 32mm width tape)
AA3022-4.5SF,AA3528,AA4040,AA5060,AAA3528,AAA5060,AAAF5060,AM2520xxx03,AM2520xxx09,AM27xxx03,AM27xxx09,APD2520xxx03,APED3528xxx-F01,APED3820xxx-F01,	7" (for 12mm width tape)
AA1010,AA1011,APDX02-41xxx-F01,APDX03-41xxx-F01,APSX02-41xxx-F01,APSX03-41xxx-F01,APSX04-41xxx-F01,WP93A8EWP/xDTGOL.	13" (for 24mm width tape)
APDX56-41xxx-F01.	13" (for 44mm width tape)


7" (for 8mm width tape)

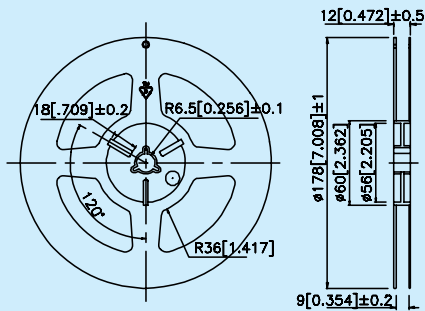


7" (for 12mm width tape)

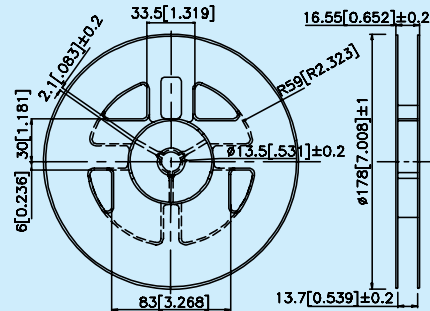


13" (for 24mm width tape)

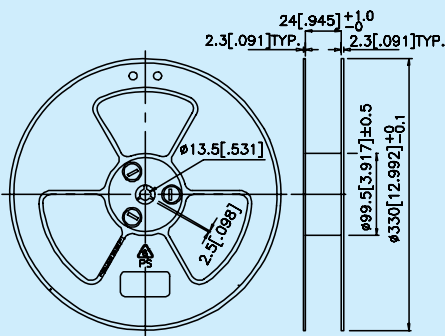











13" (for 32mm width tape)

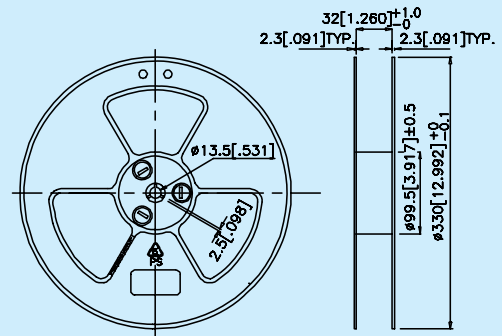











13" (for 44mm width tape)

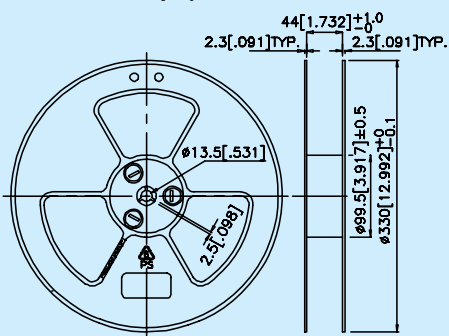











- NOTES:
1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

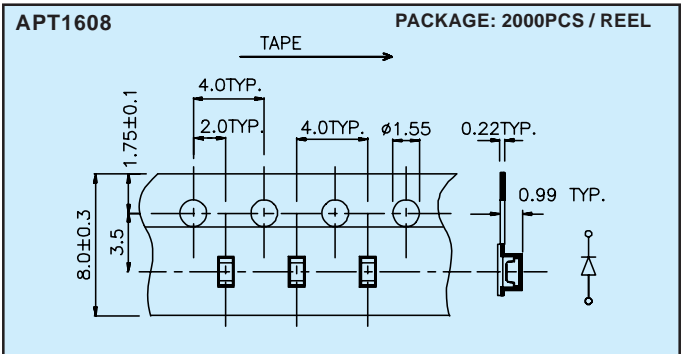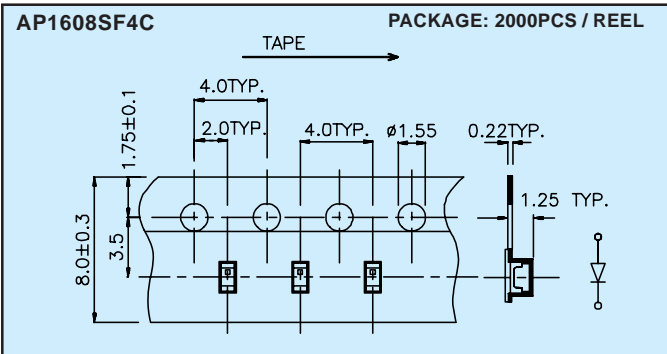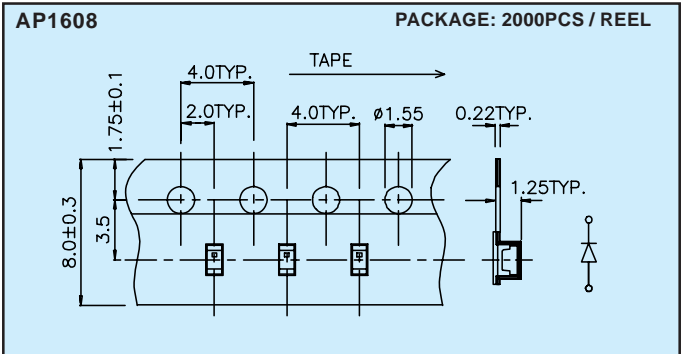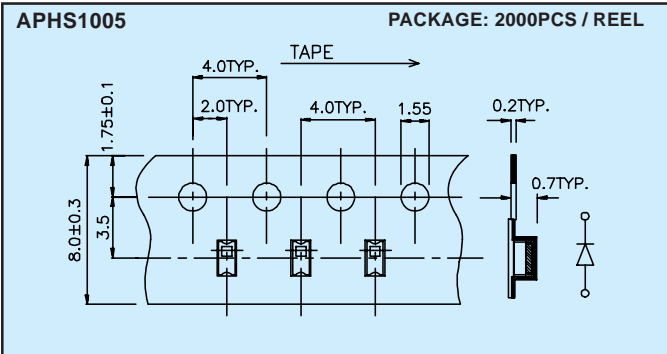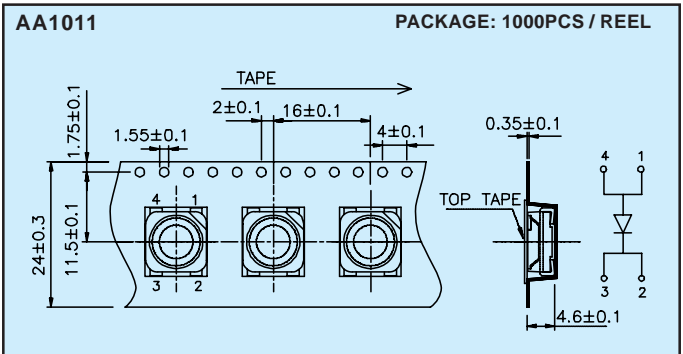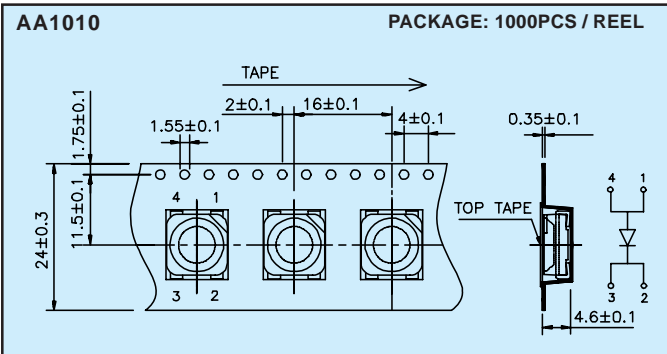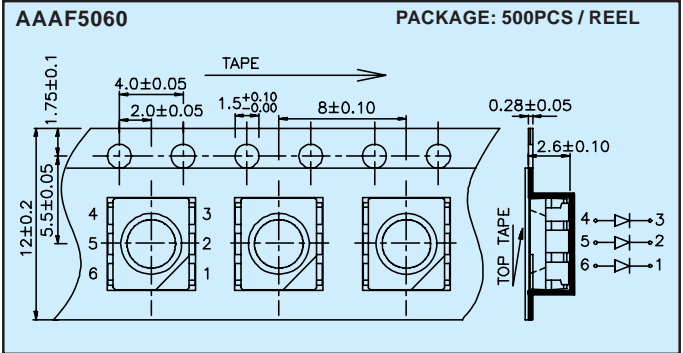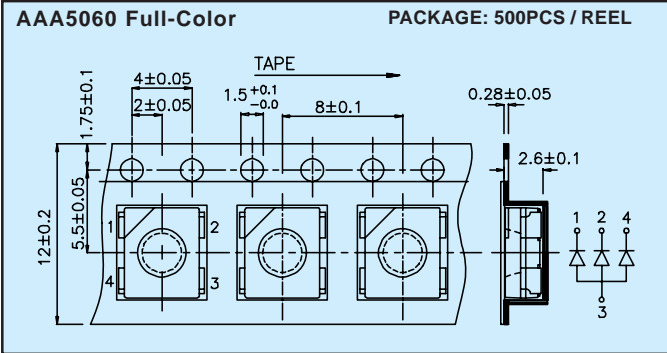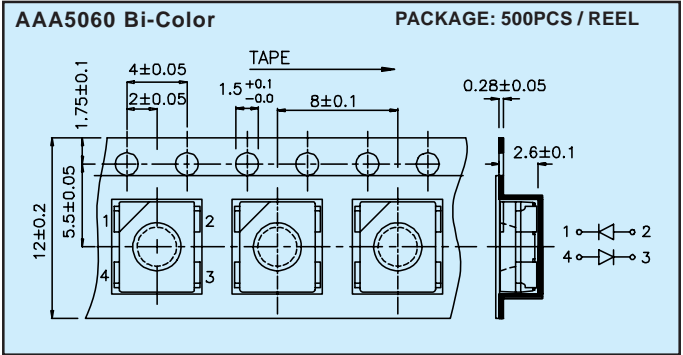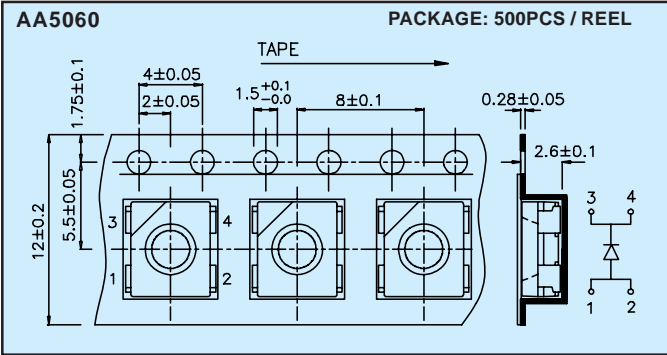











NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

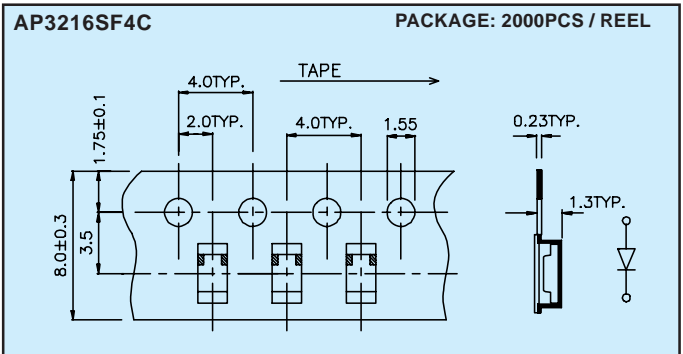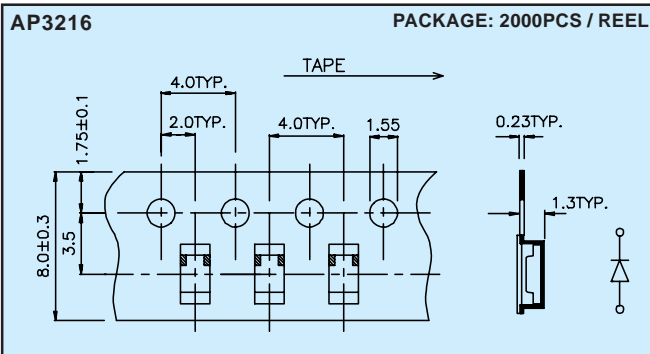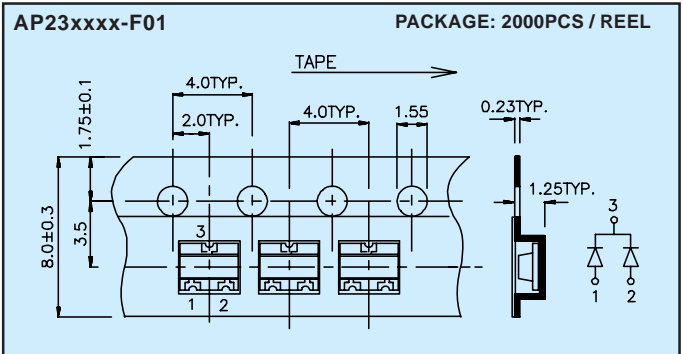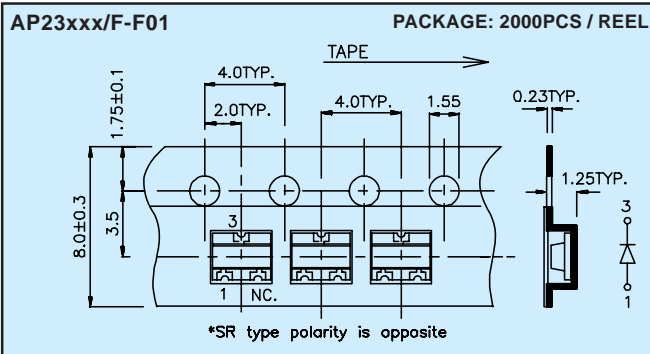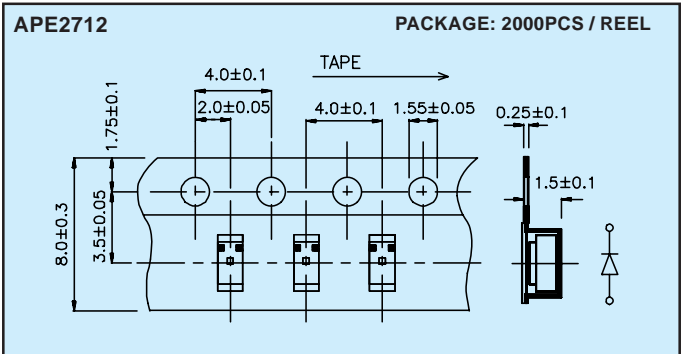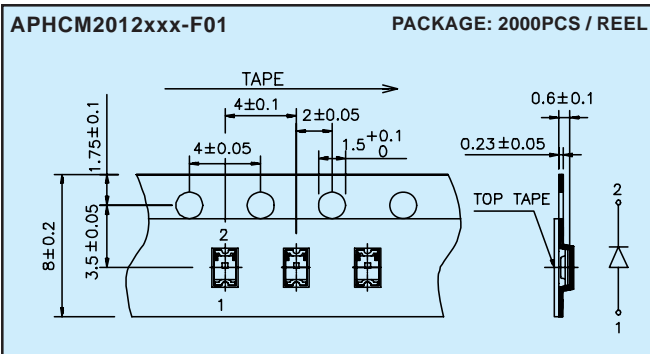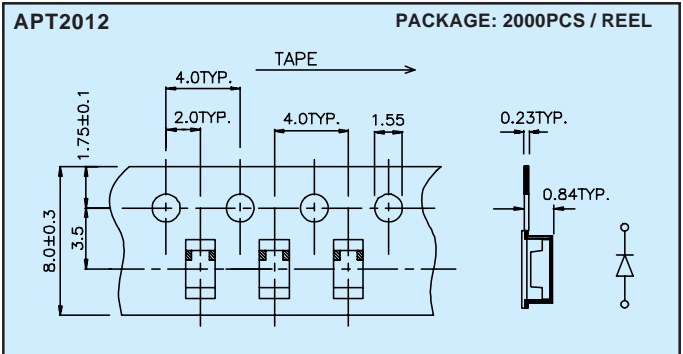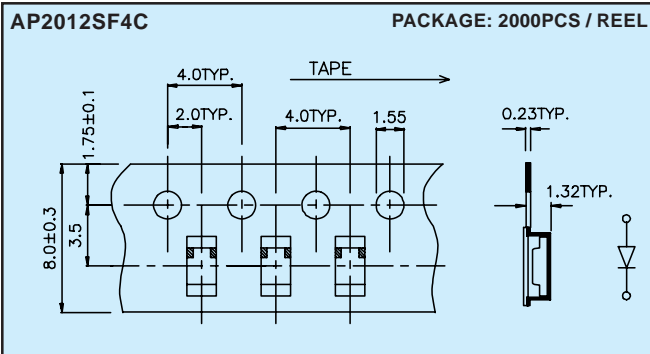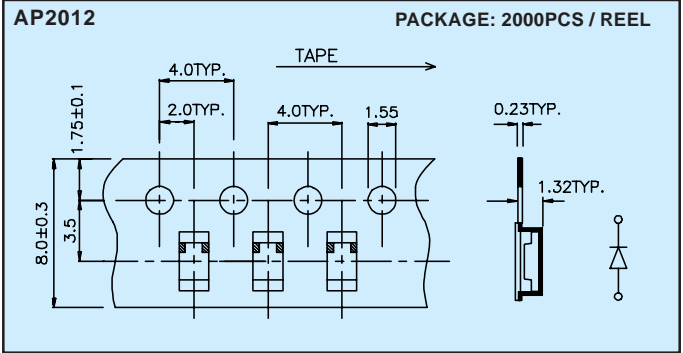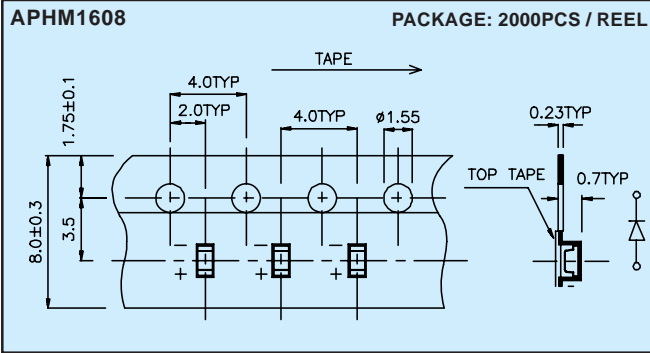











NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ± 0.25 mm(0.01 ") unless otherwise noted.

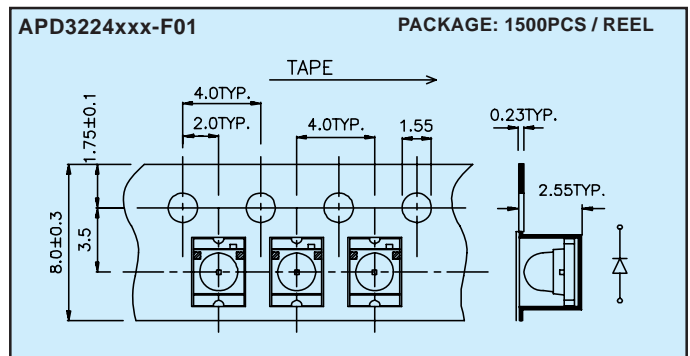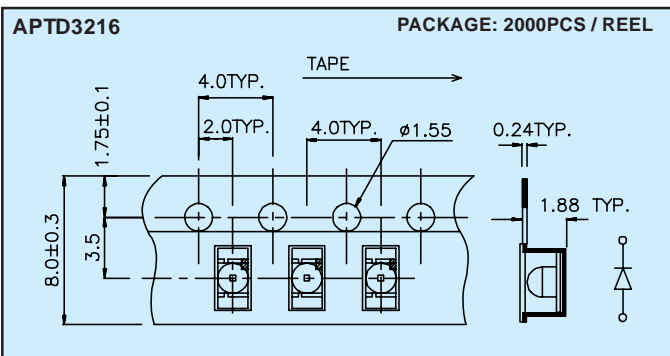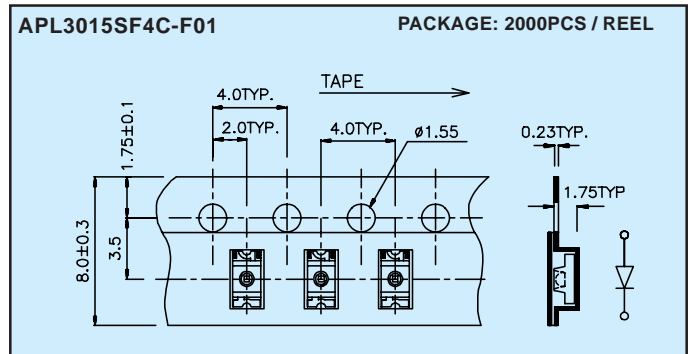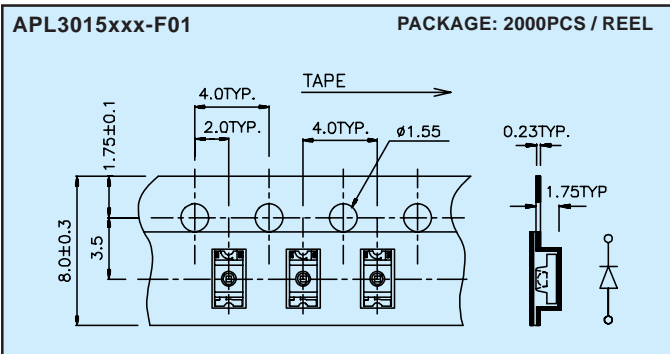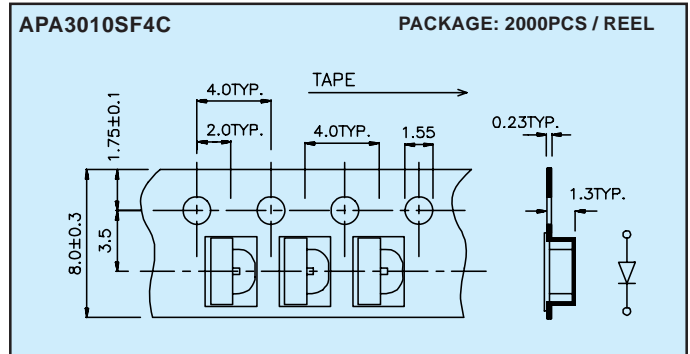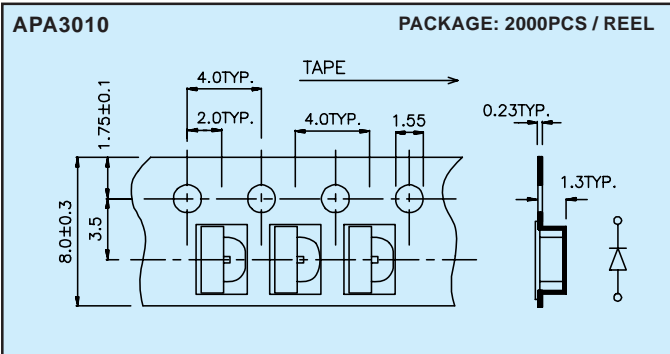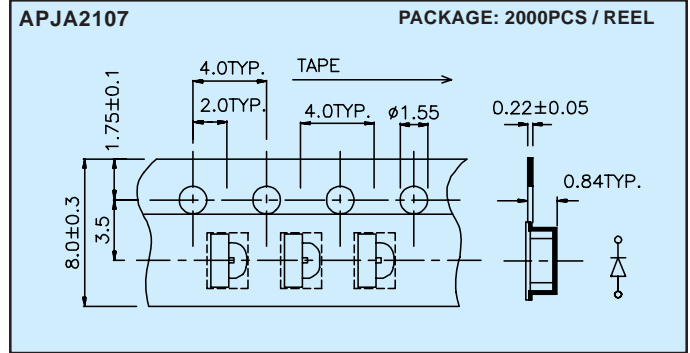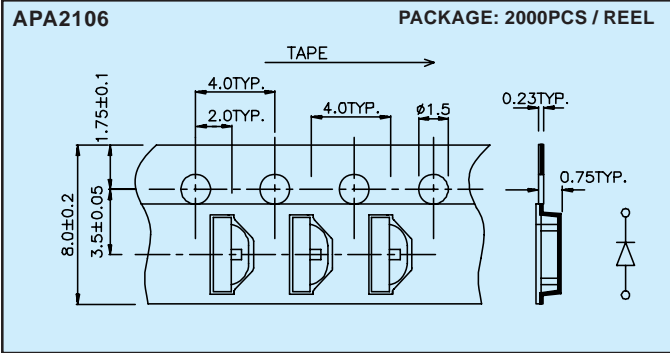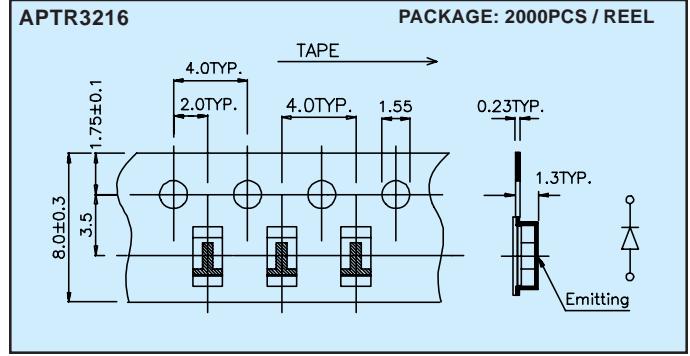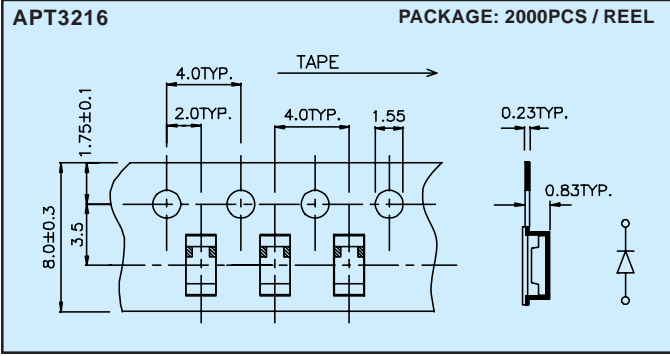











NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

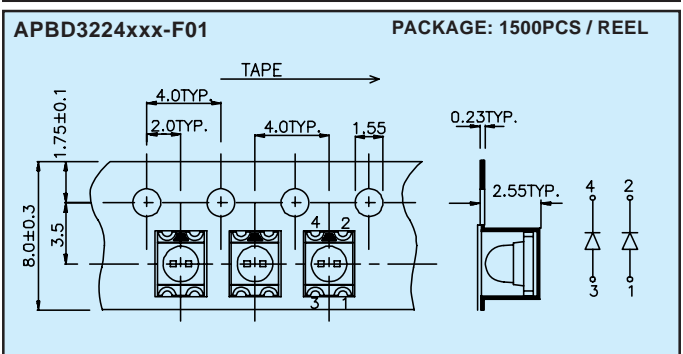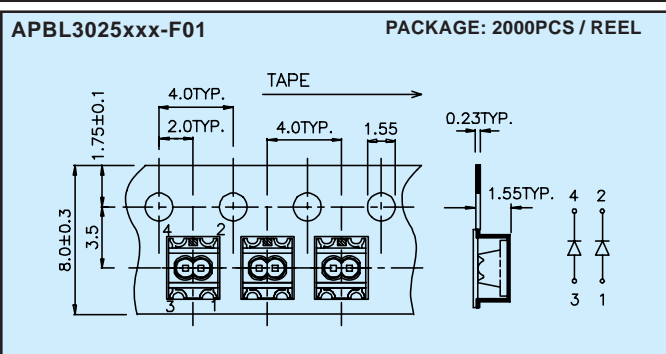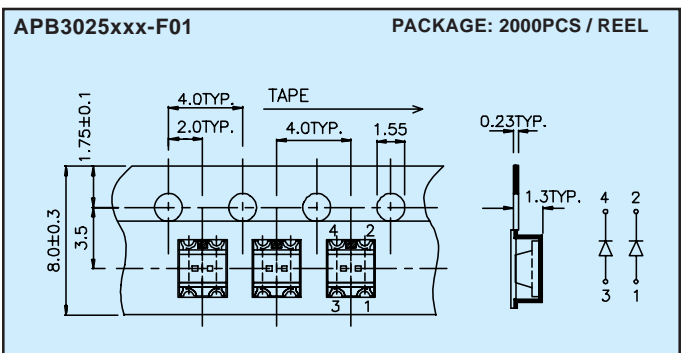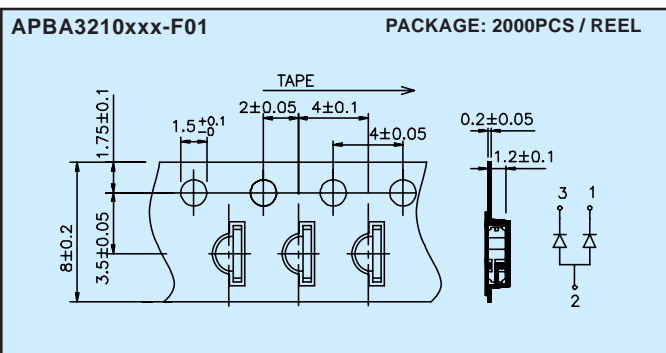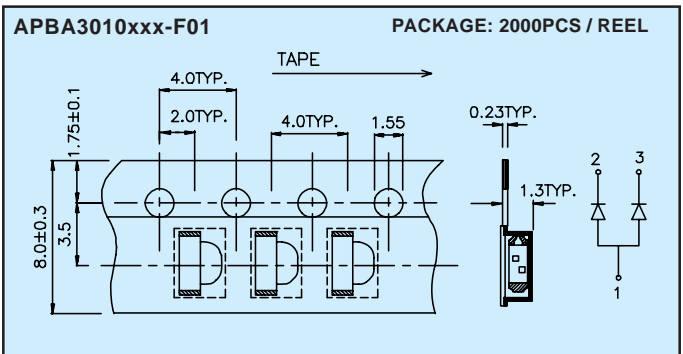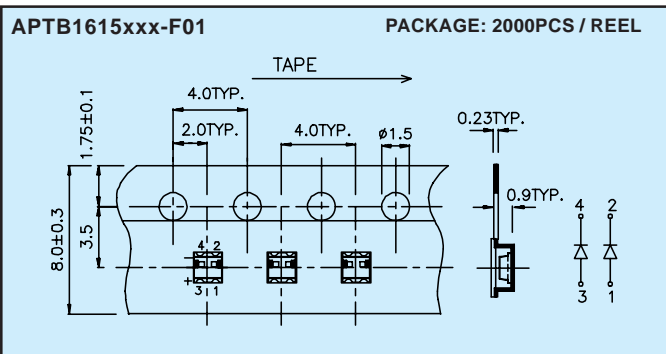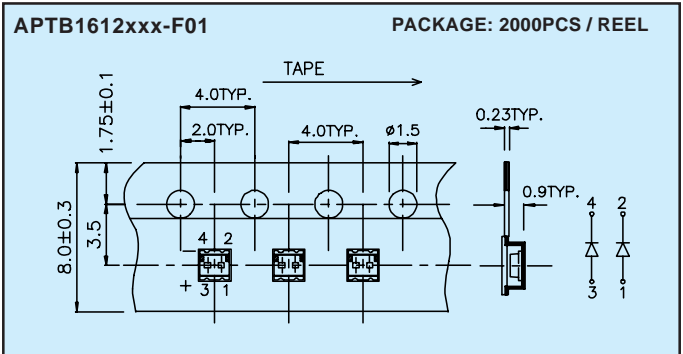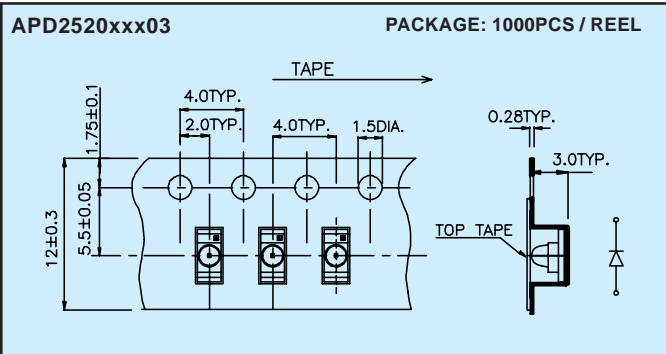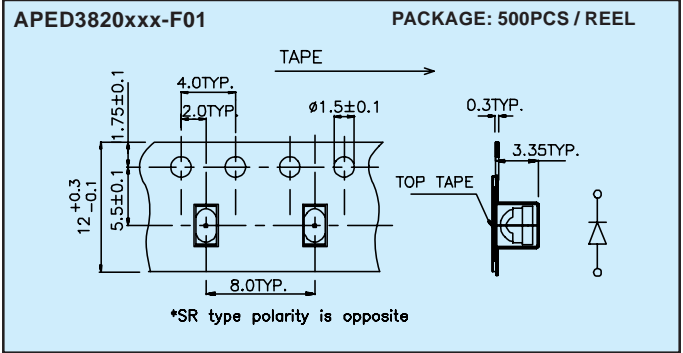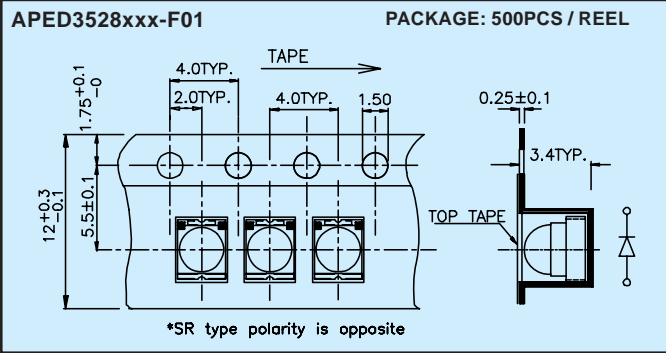









- NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.

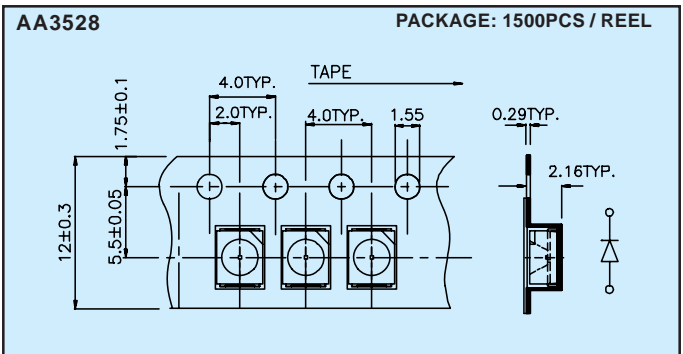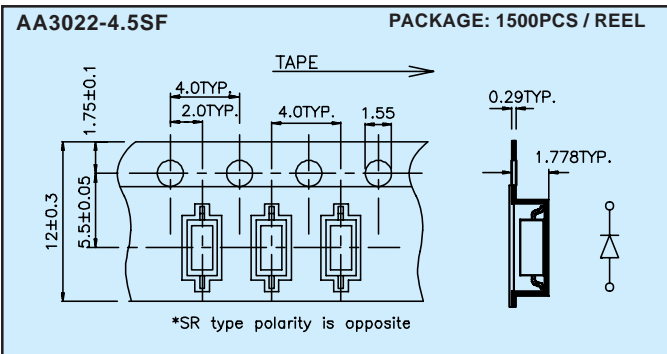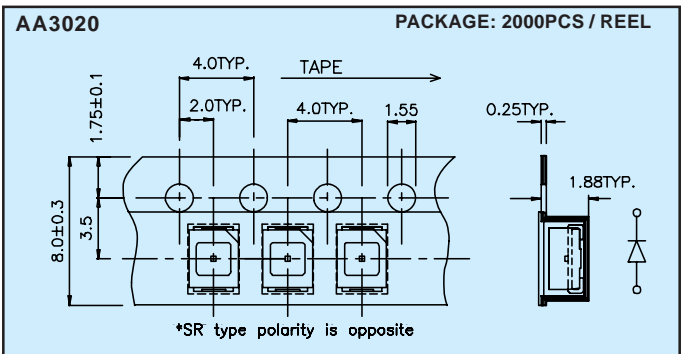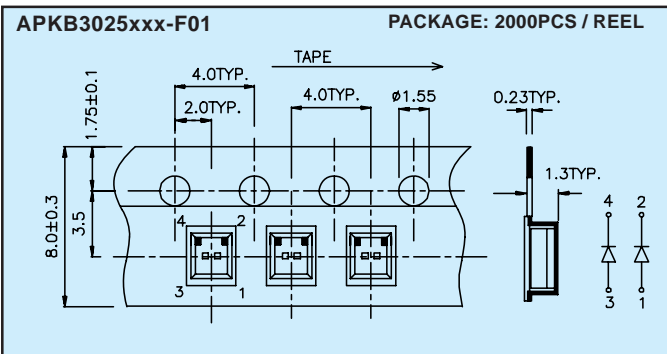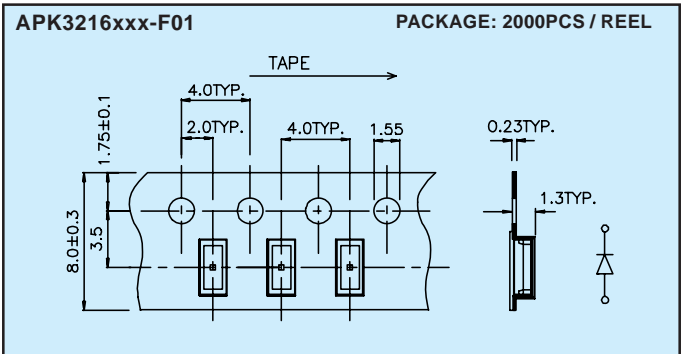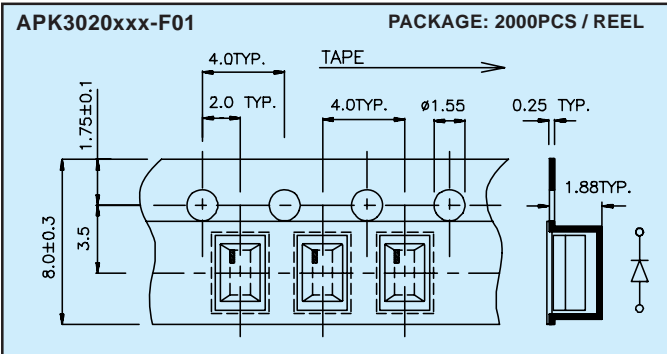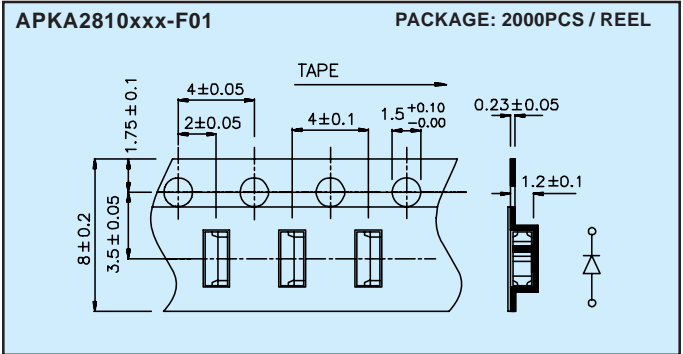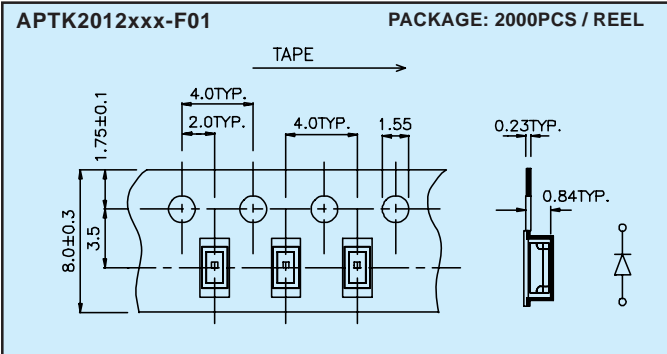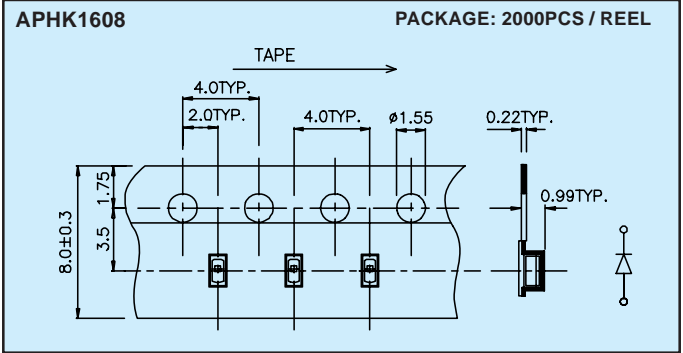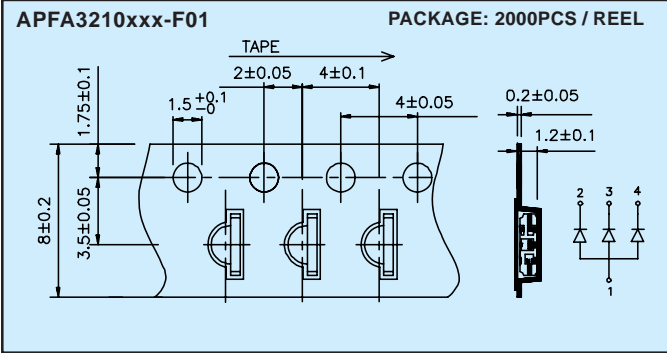

NOTES:
1. All dimensions are in millimeters(inches).
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

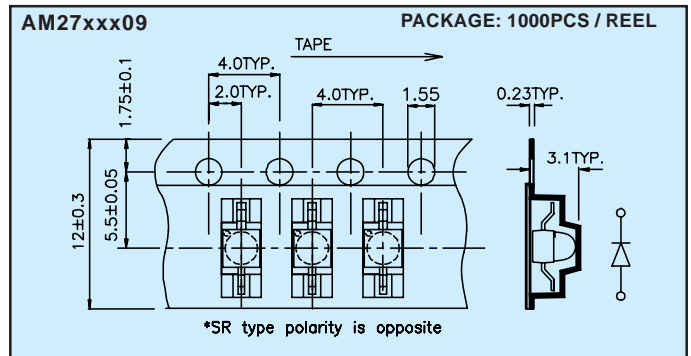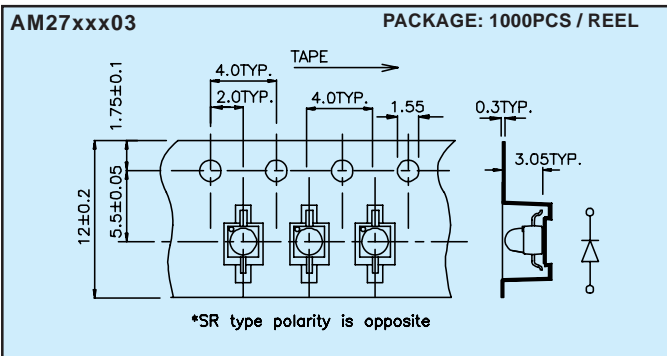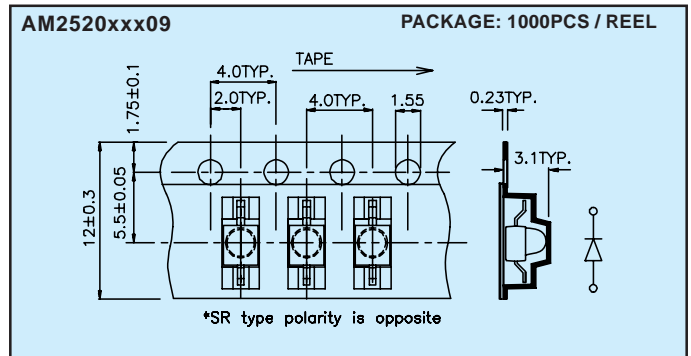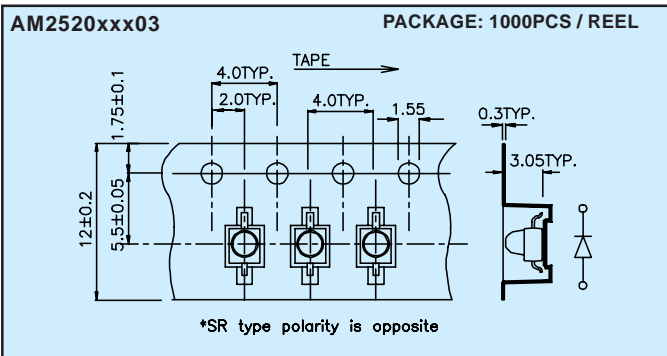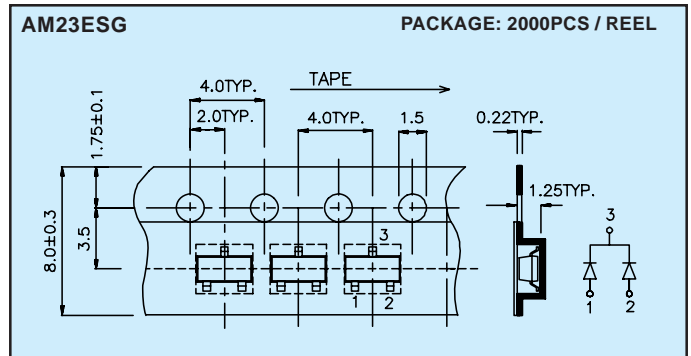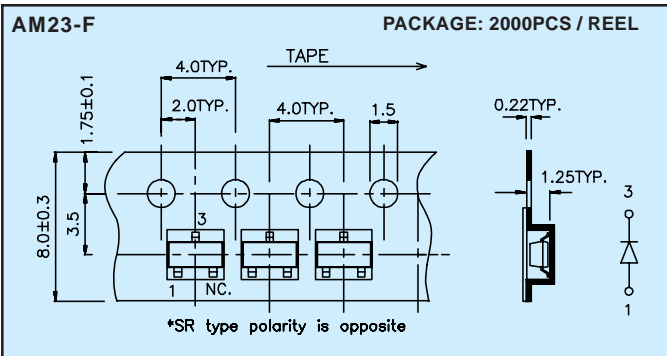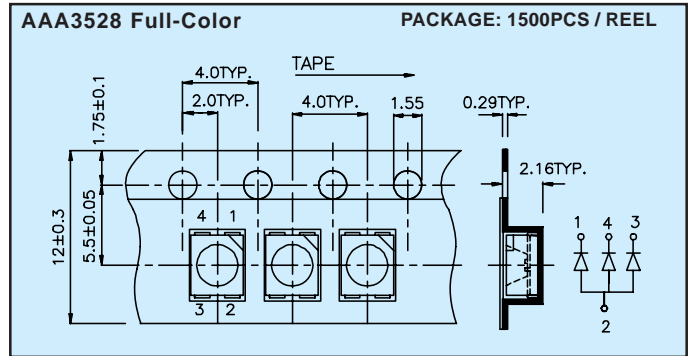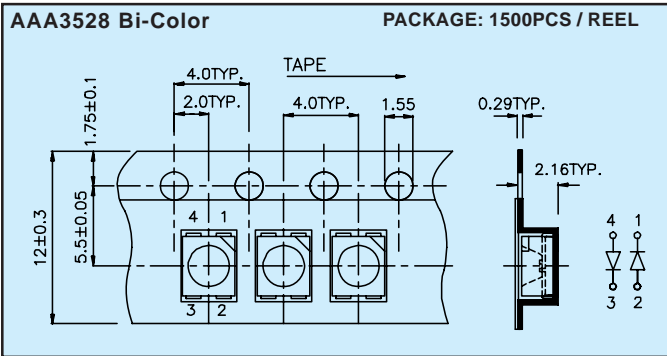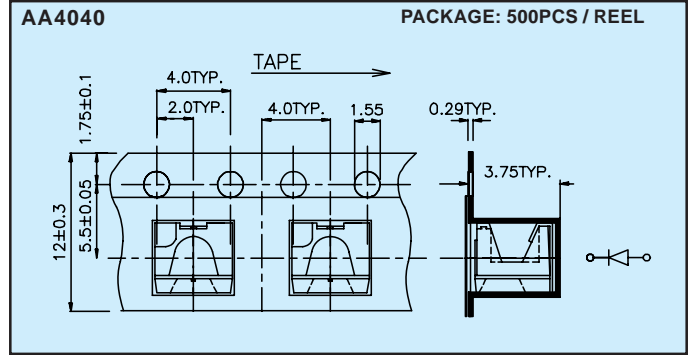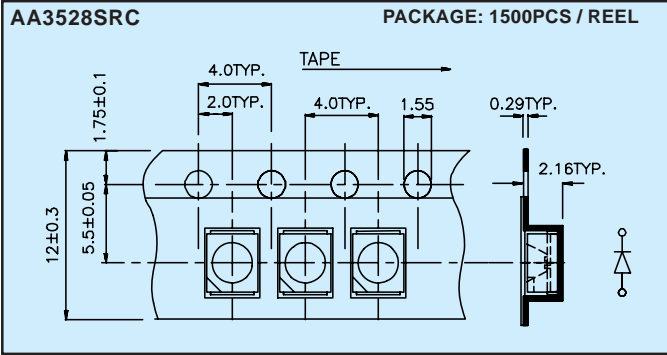


NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.

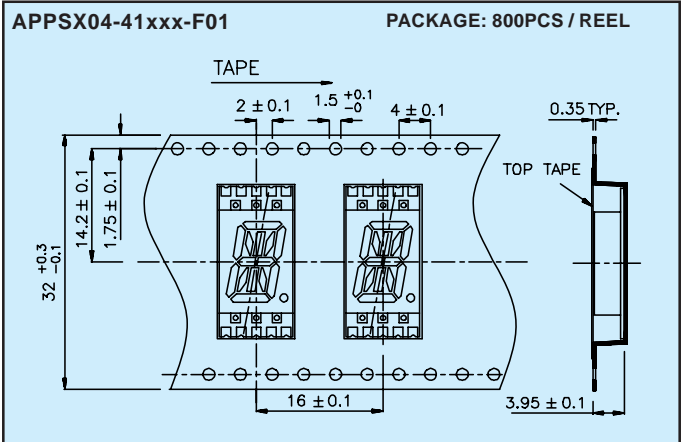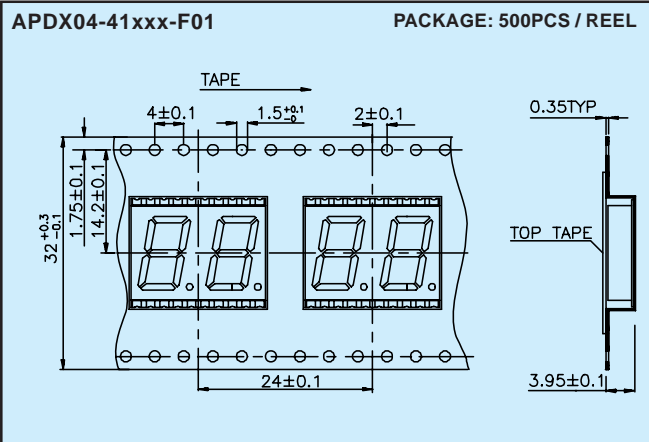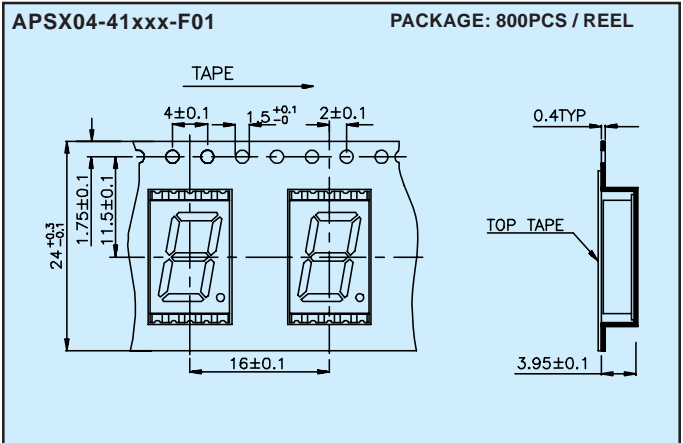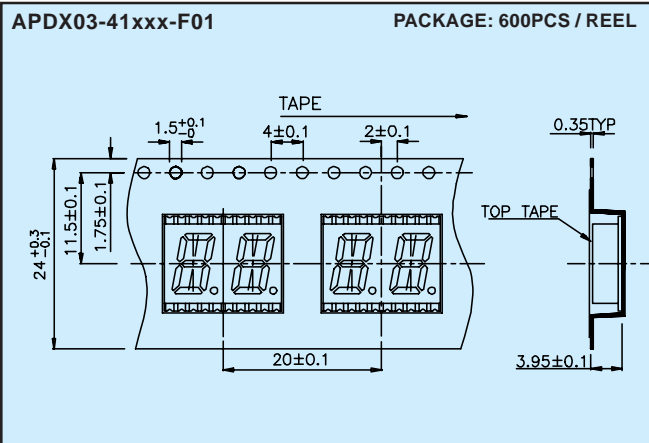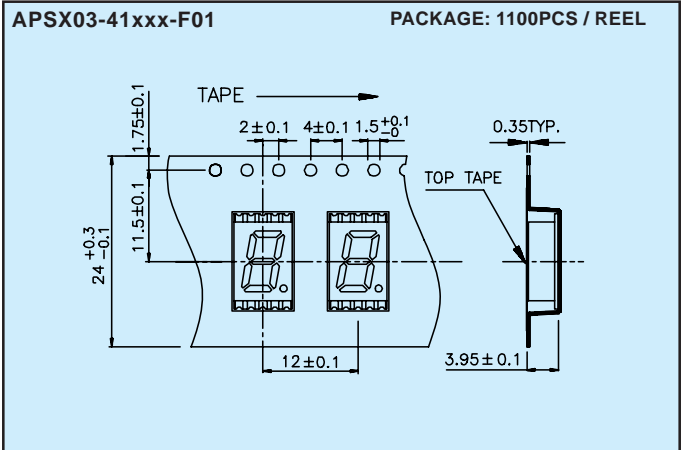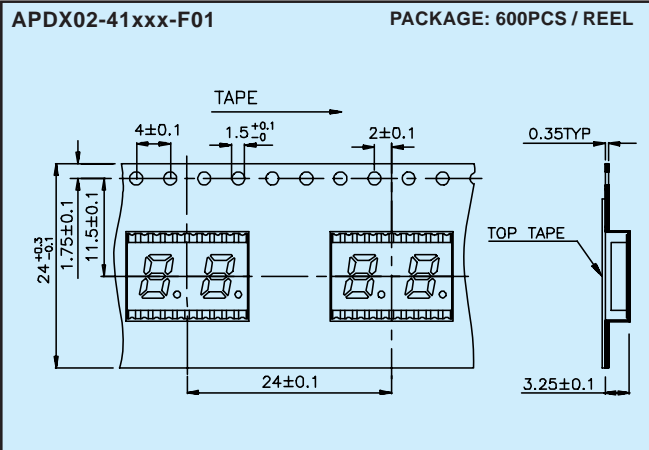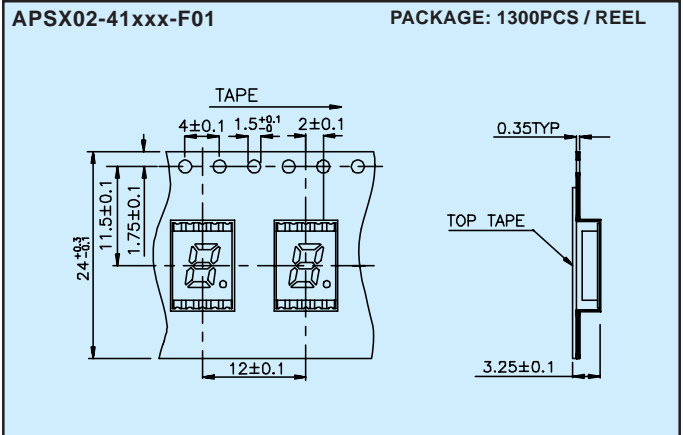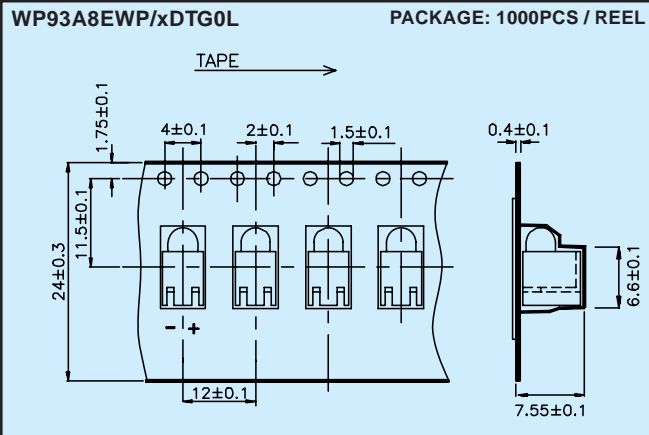


NOTES:
 1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.25mm (0.01") unless otherwise noted.


AA1010, AA1011

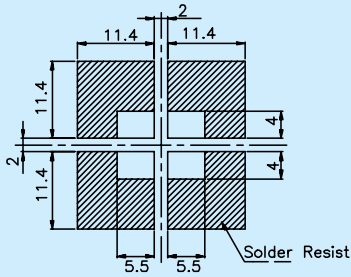


APHS1005

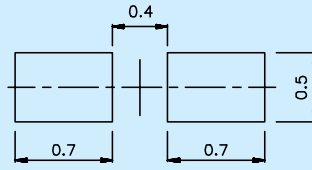


AP1608, APT1608, APHM1608

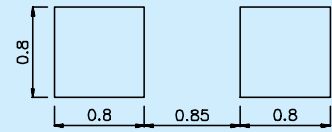


AP2012, APT2012, APTK2012xxx-F01

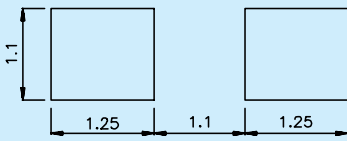


APHCM2012xxx-F01

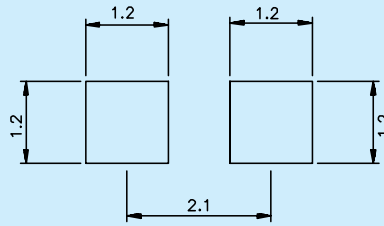


APE2712

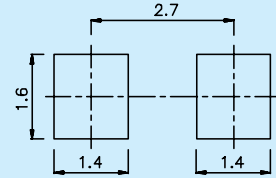


AP23xxx-F01

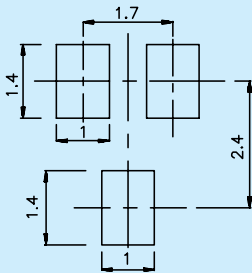


AP3216, APT3216, APTD3216, APK3216xxx-F01

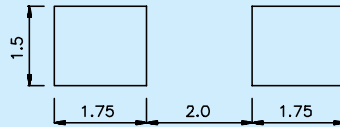


APTR3216

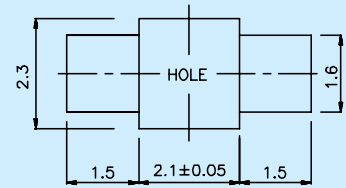


APA2106

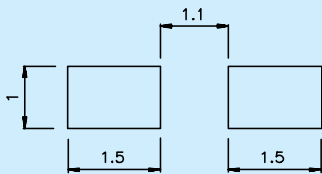


APJA2107

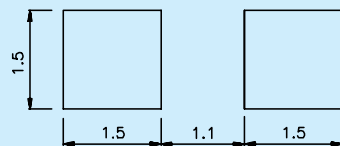


APA3010, APBA3010xxx-F01

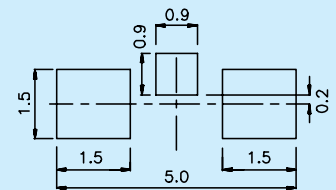


APBA3210xxx-F01

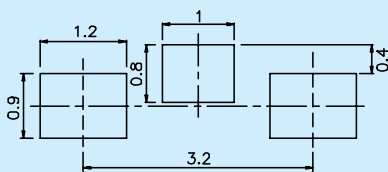

APL3015xxx-F01

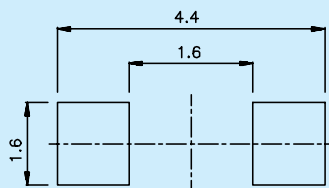


APD3224xxx-F01

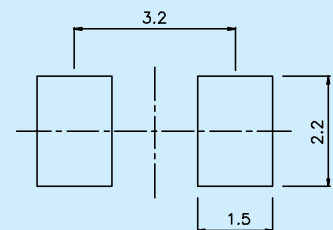


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ ($0.01''$) unless otherwise noted.


APED3820xxx-F01

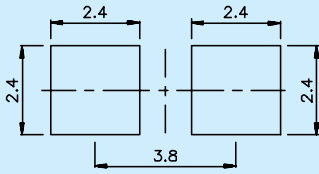


APD2520xxx03

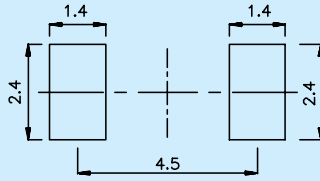


APTB1612xxx-F01

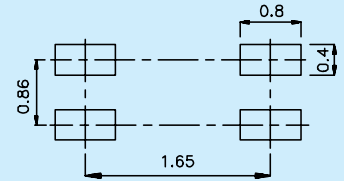


APTB1615xxx-F01

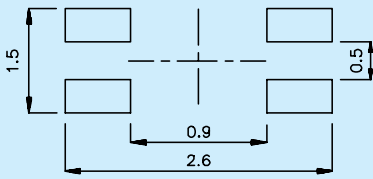


APB3025xxx-F01, APBL3025xxx-F01, APKB3025xxx-F01

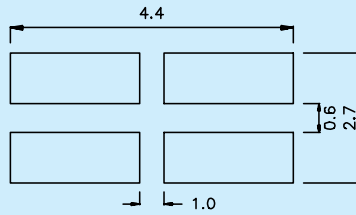


APBD3224 xxx-F01

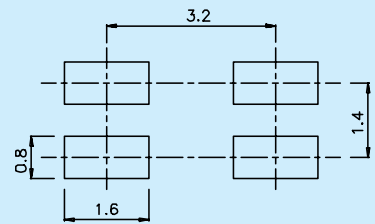


APFA3210xxx-F01

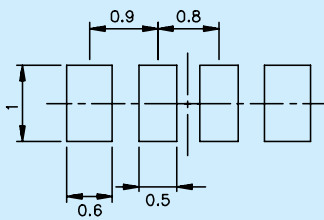


APHK1608

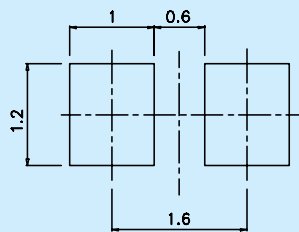


APKA2810xxx-F01

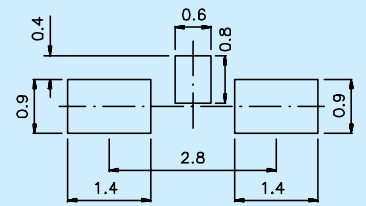


APK3020xxx-F01, AA3020

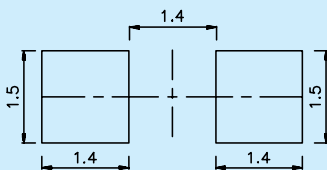


AA3022-4.5SF

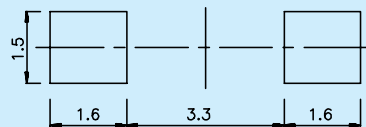


AA3528, APED3528xxx-F01

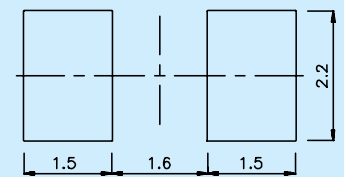


AA4040



AAA3528

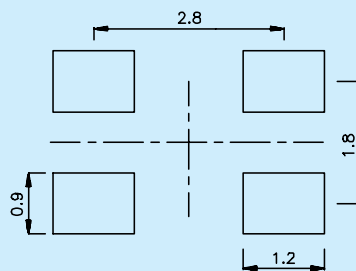

AM23-F

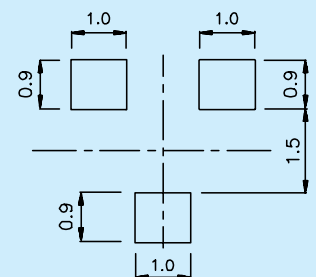

NOTES:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}(0.01\text{'})$ unless otherwise noted.

<p>AM2520xxx03,AM27xxx03</p>	<p>AM2520xxx09,AM27xxx09</p>	<p>WP93A8EWP/xDTG0L</p>
<p>AA5060, AAA5060</p>	<p>AAAF5060</p>	<p>APSX02-41xxx-F01</p>
<p>APDX02-41xxx-F01</p>	<p>APSX03-41xxx-F01</p>	<p>APDX03-41xxx-F01</p>
<p>APSX04-41xxx-F01</p>	<p>APDX04-41xxx-F01</p>	<p>APPSX04-41xxx-F01</p>
<p>APPDX04-41xxx-F01</p>	<p>APSX56-41xxx-F01</p>	<p>APDX56-41xxx-F01</p>

NOTES:
 1. All dimensions are in millimeters(inches).
 2. Tolerance is ±0.25mm(0.01") unless otherwise noted.


Soldering

General Notes

1. We recommend manual soldering operations only for repair and rework purposes. The soldering iron should not exceed 30W in power. The maximum soldering temperature is 300 °C for Pb-Sn solder and 350 °C for lead-free solder for normal lamps and displays. For blue (425nm), and blue-green (525nm) LEDs, the maximum soldering iron temperature is 280 °C. Do not place the soldering iron on the component for more than 3 seconds.




- The tip of the soldering iron should never touch the lens epoxy.
- Do not apply stress to the leads when the component is heated above 85 °C, otherwise internal wire bonds may be damaged.
- SMD products must be mounted according to specified soldering pad patterns. Refer to the product datasheet for details. Solder paste must be evenly applied to each soldering pad to insure proper bonding and positioning of the component.

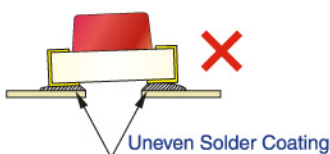


5. After soldering, allow at least three minutes for the component to cool to room temperature before further operations.

Recommended Wave Soldering Profiles For Kingbright Thru-Hole Products

1. Wave Soldering Profile With Pb-Sn Solder

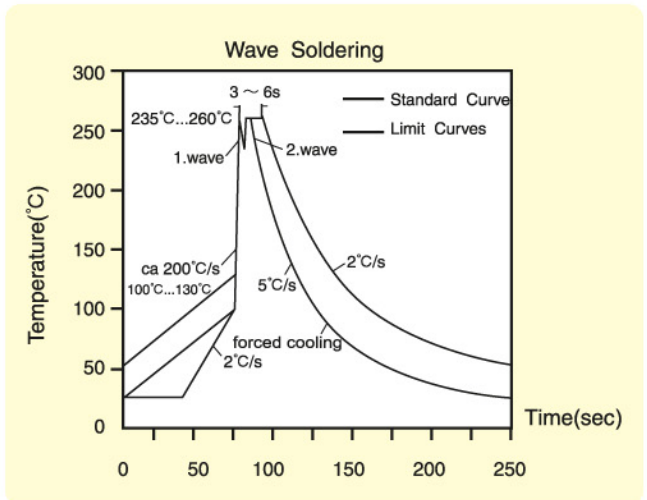

2. Lead-Free Wave Soldering Profile

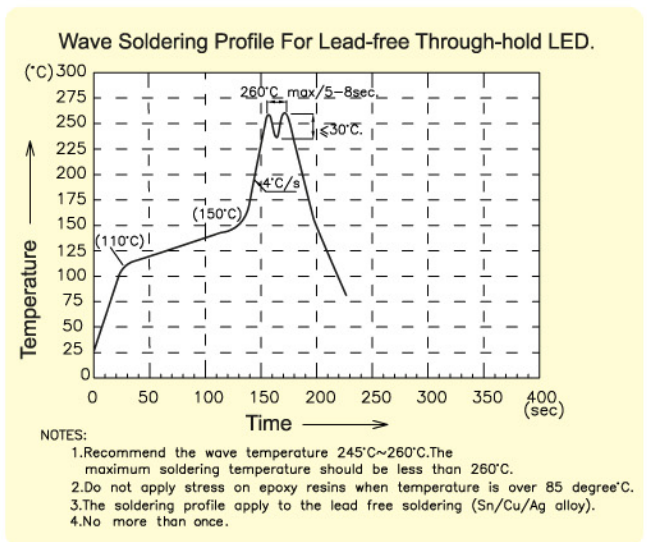




Recommended Reflow Soldering Profiles For Kingbright SMD Products


1. Reflow Soldering Profile With Pb-Sn Solder

No more than two soldering passes with the recommended profile.

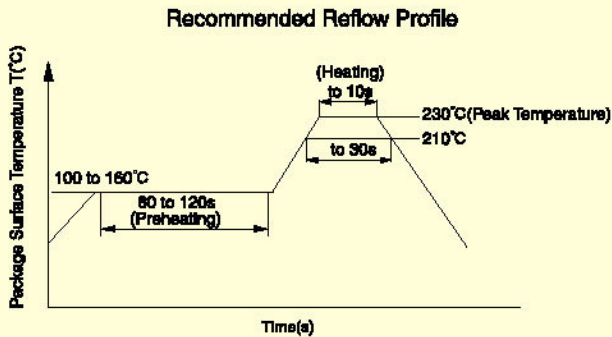

2. Lead-Free Reflow Soldering Profile

No more than two soldering passes with the recommended profile.

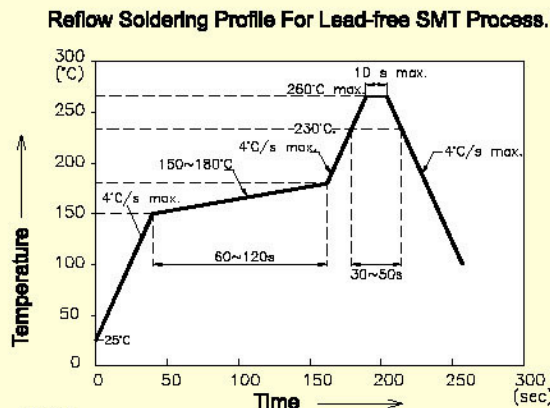

NOTES:

1. We recommend the reflow temperature 245°C(±5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Static Electricity and Voltage Spikes in InGaN/GaN Products

InGaN/GaN products are sensitive to electrostatic discharge (ESD) and other transient voltage spikes. ESD and voltage spikes can affect the component's reliability, increase reverse current, and decrease

forward voltage. This may result in reduced light intensity or cause component failure.

Kingbright InGaN/GaN products are stored in anti-static packaging for protection during transport and storage. Please note the anti-static measures below when handling Kingbright InGaN/GaN products:

Design Precautions

Products using InGaN/GaN components must incorporate protection circuitry to prevent ESD and voltage spikes from reaching the vulnerable component.


ESD Protection During Production

Static discharge can result when static-sensitive products come in contact with the operator or other conductors. The following procedures may decrease the possibility of ESD damage:


- a. Minimize friction between the product and surroundings to avoid static buildup.
- b. All production machinery and test instruments must be electrically grounded.
- c. Operators must wear anti-static bracelets.
- d. Wear anti-static suit when entering work areas with conductive machinery.
- e. Set up ESD protection areas using grounded metal plating for component handling.
- f. All workstations that handle IC and ESD-sensitive components must maintain an electrostatic potential of 150V or less.
- g. Maintain a humidity level of 50% or higher in production areas.
- h. Use anti-static packaging for transport and storage.
- i. All anti-static equipment and procedures should be periodically inspected and evaluated for proper functionality.

Lead Forming

1. Any lead forming or bending must be done before soldering, never during or after soldering.
2. Avoid placing stress the LED lens in order to prevent fracture in the lens epoxy and to prevent damage to the internal wire bonding.
3. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures.
4. There must be a minimum of 2mm clearance between the base of the LED lens and the lead bend.
5. Avoid bending the leads at the same point more than once.
6. Assembly Precautions
The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead forming may be required to insure matching pitches between the leads and the mounting holes. Refer to figure below for proper lead forming procedures.

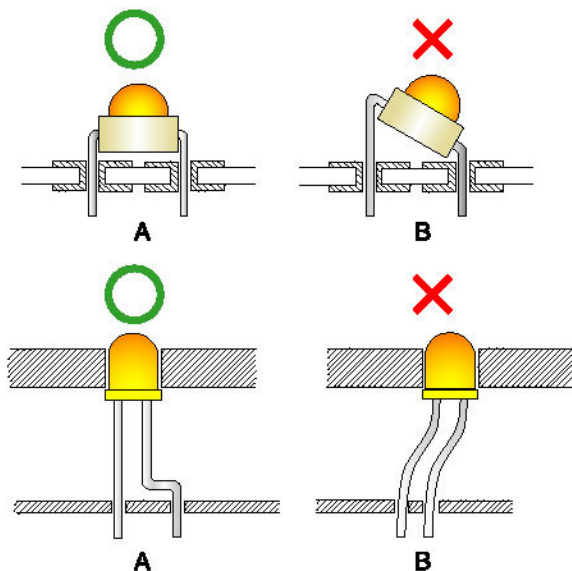

7. Avoid lead forming once the component has been mounted onto the PCB.

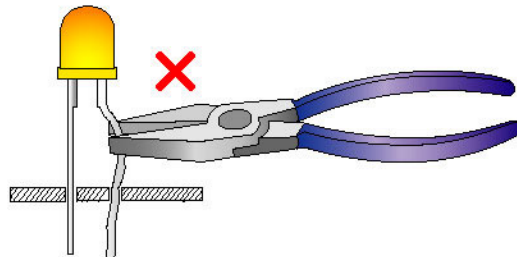


Cleaning



1. Do not use harsh organic solvents such as trichloroethylene, acetone, Chlorosen, and Diflon S3MC for cleaning because they may cloud or damage the LED lens.
2. Isopropyl alcohol or deionized water are recommended solvents for cleaning.
3. Special attention should be taken if other chemicals are used for cleaning because other solvents may damage the epoxy in the lens or housing.
4. The cleaning process should take place at room temperature and the devices should not be washed for more than one minute.
5. When water is used in the cleaning process, immediately remove excess moisture from the LED via forced-air drying afterwards.

Miscellaneous Design Notes


1. Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
2. LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

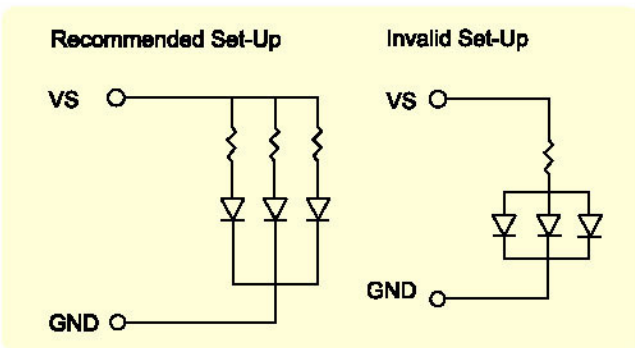

3. The driving circuit should be designed to avoid reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
4. During soldering, SMD components should be mounted such that the leads are placed perpendicular to the direction of PCB travel to insure the solder on each lead melts simultaneously during reflow.

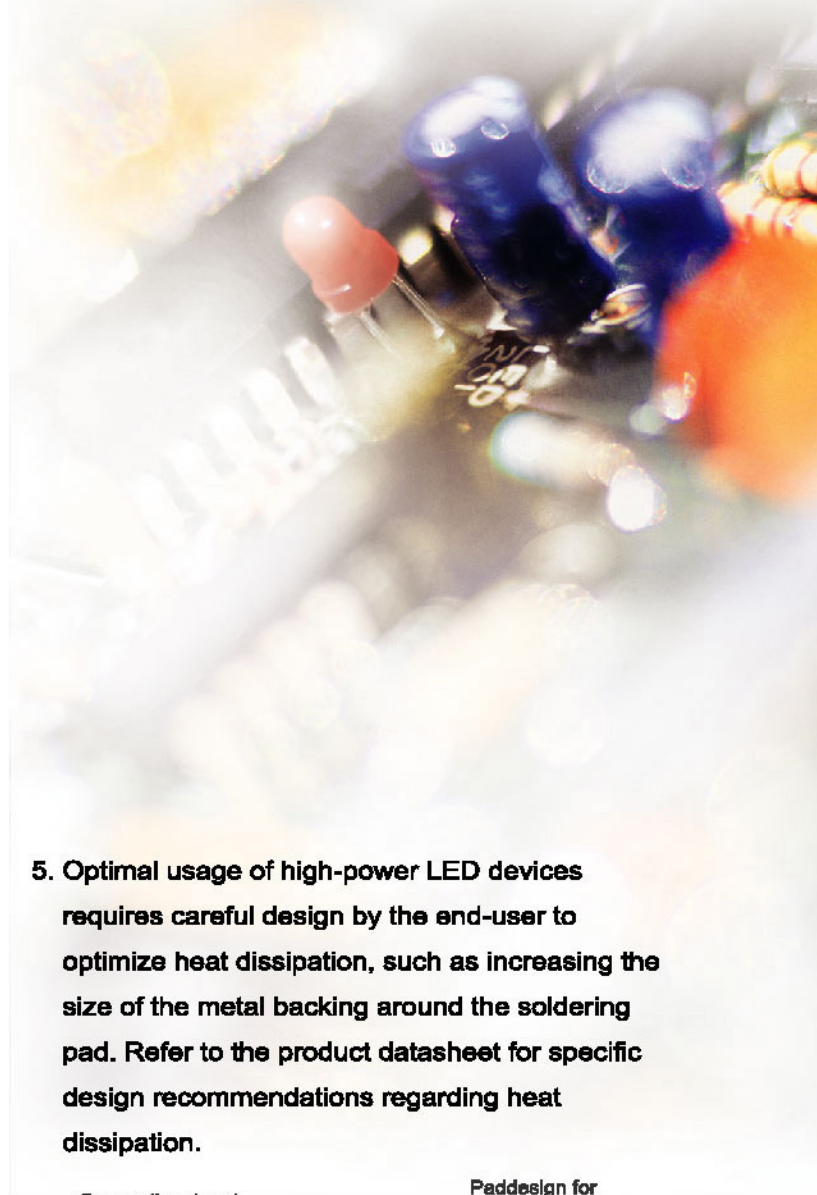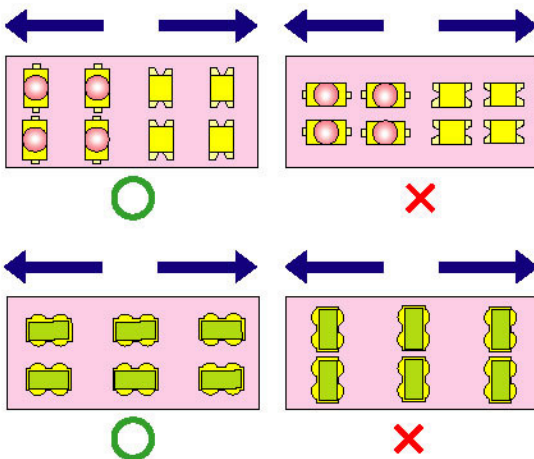

5. Optimal usage of high-power LED devices requires careful design by the end-user to optimize heat dissipation, such as increasing the size of the metal backing around the soldering pad. Refer to the product datasheet for specific design recommendations regarding heat dissipation.

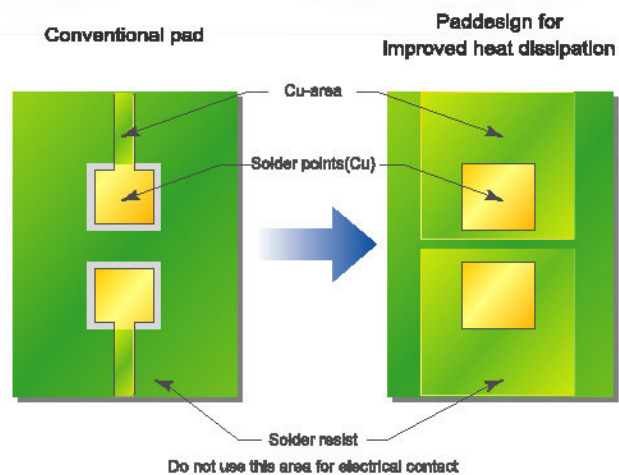


6. High temperatures can reduce device performance and reliability. Keep LED devices away from heat sources for best performance.

Restrictions on Product Use

1. The information contained within this document is subject to change without notice. Before referencing this document, please confirm that it is the most current version available.
2. Not all devices and product families are available in every country.
3. The light output from UV, blue, white, and other high-power LEDs may cause injury to the human eye when viewed directly.
4. LED devices may contain gallium arsenide (GaAs) material. GaAs is harmful if ingested. GaAs dust and fumes are toxic. Do not break, cut, or pulverize LED devices. Do not dissolve LEDs in chemical solvents.
5. Semiconductor devices can fail or malfunction due to their sensitivity to electrical fluctuation and physical stress. It is the responsibility of the user to observe all safety standards when using Kingbright products, in order to avoid situations in which the malfunction or failure of a Kingbright product could cause injury, property damage, or the loss of human life. In developing designs, please insure that Kingbright products are used within specified operating conditions as set forth in the most recent product specification datasheet.



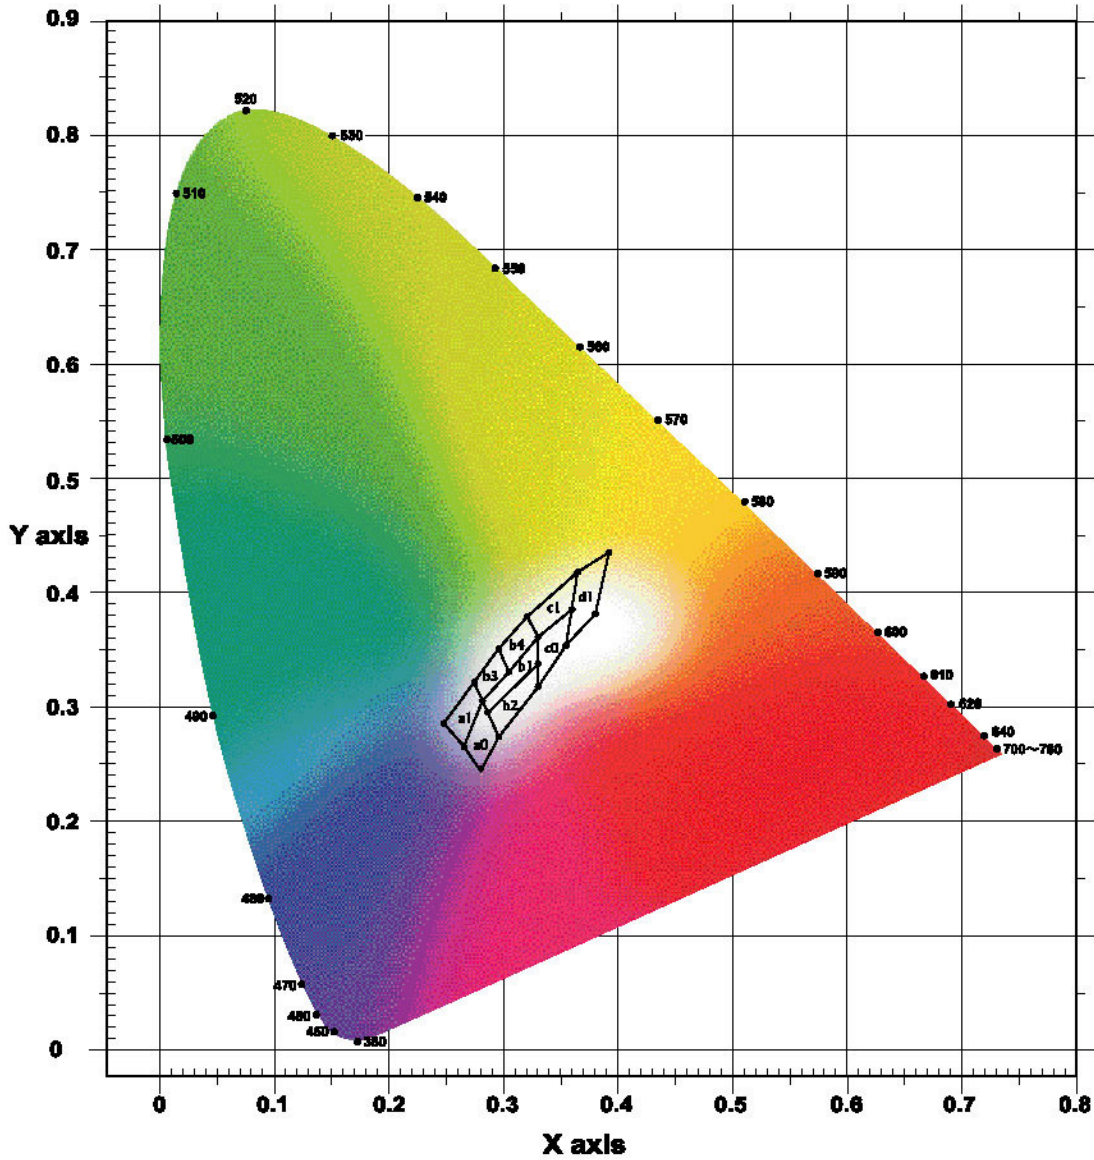

● Color and color coordinates on this diagram are approximate.

a1				
X	0.248	0.275	0.283	0.264
Y	0.286	0.321	0.305	0.287
b1				
X	0.283	0.330	0.330	0.287
Y	0.305	0.360	0.339	0.295
c1				
X	0.321	0.366	0.361	0.330
Y	0.379	0.419	0.385	0.360

a0				
X	0.264	0.283	0.296	0.280
Y	0.267	0.305	0.276	0.248
b2				
X	0.287	0.330	0.330	0.296
Y	0.295	0.339	0.318	0.276
c0				
X	0.330	0.361	0.356	0.330
Y	0.360	0.385	0.351	0.318

b3				
X	0.275	0.298	0.306	0.283
Y	0.321	0.350	0.332	0.305
b4				
X	0.298	0.321	0.330	0.306
Y	0.350	0.379	0.360	0.332
d1				
X	0.366	0.391	0.380	0.356
Y	0.419	0.436	0.381	0.351

● Ta=25°C, If=20mA

● Measurement Uncertainty of the Color Coordinates:±0.01

SELECTION CODE FOR STANDARD LEDS					
Group	Light intensity in mcd(10mA)		Group	Light intensity in mcd(10mA)	
	min.	max.		min.	max.
F	0.1	0.25	R	12	23
G	0.2	0.4	S	18	35
H	0.3	0.6	T	28	55
I	0.4	1	U	40	90
K	0.7	1.5	V	70	130
L	1	3	W	110	200
M	1.8	5	X	170	280
N	3	7	Y	230	350
P	5	12	Z	300	500
Q	8	17			

SELECTION CODE FOR SUPER BRIGHT LEDS					
Group	Light intensity in mcd(20mA)		Group	Light intensity in mcd(20mA)	
	min.	max.		min.	max.
A	1.6	3.5	ZA	2800	3800
B	2.6	5.5	ZB	3300	4500
C	4	10	ZC	3800	5500
D	7	15	ZD	4700	6500
E	10	24	ZE	5700	7500
F	18	44	ZF	6700	8500
G	36	60	ZG	7500	10000
H	50	90	ZH	8000	12000
M	70	130	ZM	10000	16000
N	110	220	ZN	12000	20000
P	180	320	ZP	16000	24000
Q	280	420	ZQ	20000	32000
R	380	550	ZR	24000	40000
S	480	750	ZS	32000	50000
T	650	1100	ZT	40000	60000
U	900	1500	ZU	50000	80000
V	1200	1800	ZV	60000	100000
W	1500	2100	ZW	80000	120000
X	1800	2500	ZX	100000	160000
Y	2200	3000	ZY	120000	200000
Z	2500	3300	ZZ	160000	240000

SELECTION CODE FOR DISPLAYS					
Group	Light intensity in ucd(10mA)		Group	Light intensity in ucd(10mA)	
	min.	max.		min.	max.
C	60	160	P	12000	24000
D	120	280	Q	18000	36000
E	200	410	R	26000	60000
F	300	640	S	44000	101000
G	480	1040	T	75000	173000
H	800	1600	U	128000	293000
I	1200	2500	V	217000	498000
K	1900	4100	W	368000	846000
L	3000	6400	X	626000	1438000
M	4700	10500	Y	1063000	2445000
N	8000	16000	Z	1807000	4156000

SELECTION CODE FOR NPN PHOTOTRANSISTORS					
Group	Photocurrent(mA)		Group	Photocurrent(mA)	
	min.	max.		min.	max.
F	0.1	0.25	L	1	3
G	0.2	0.4	M	1.8	5
H	0.3	0.6	N	3	7
I	0.4	1	P	5	12
K	0.7	1.5			

SELECTION CODE FOR INFRARED EMITTING DIODES					
Group	Radiant intensity in mW/sr(20mA)		Group	Radiant intensity in mW/sr(20mA)	
	min.	max.		min.	max.
AK	0.5	2	D	7	15
AL	0.8	3.2	E	10	24
A	1.6	3.5	F	18	44
B	2.6	5.5	G	36	60
C	4	10	H	50	90

COLOR CODE FOR BLUE LEDS + DISPLAYS					
Group	Dom. WaveLength (nm)		Group	Dom. WaveLength (nm)	
	min.	max.		min.	max.
1	443	452	3A	469	475
2	448	457	3B	471	477
3	453	462	4A	473	479
1A	458	465	4B	475	481
1B	461	468	5A	477	483
2A	464	471	5B	479	485
2B	467	473	5C	481	488

COLOR CODE FOR LEDS + DISPLAYS				
Group	Dom. WaveLength (nm)			
	Green		Yellow	
	min.	max.	min.	max.
0	556	559		
1	559	561	581	584
2	561	563	584	586
3	563	565	586	588
4	565	567	588	590
5	567	569	590	592
6	569	571	592	594
7	571	573	594	597
8	573	575	597	600

SOLDERING INSTRUCTIONS						
Types	Dip and wave soldering			Iron soldering (with 1.5mm iron tip)		
	Temperature of the soldering bath	Maximum soldering time	Distance from solder joint to package	Temperature of soldering iron	Maximum soldering time	Distance from solder joint to package
LEDS	<=260°C	3s	>=2mm	<=350°C	3s	>2mm
	<=260°C	5s	>=5mm	<=350°C	5s	>5mm
SMDS	/	/	/	<=230°C	10s	/
DISPLAYS	<=260°C	3s	>2mm	<=350°C	3s	>2mm
PHOTOCOUPLER	<=260°C	3s	>2mm	<=310°C	3s	/
	/	/	/	<=260°C	10s	/