

High-Performance T-1^{3/4} (5 mm) TS AlGaAs Infrared (875 nm) Lamp

Technical Data

HSDL-4200 Series

HSDL-4220 30°

HSDL-4230 17°

Features

- Very High Power TS AlGaAs Technology
- 875 nm Wavelength
- T-1^{3/4} Package
- Low Cost
- Very High Intensity:
HSDL-4220 - 38 mW/sr
HSDL-4230 - 75 mW/sr
- Choice of Viewing Angle:
HSDL-4220 - 30°
HSDL-4230 - 17°
- Low Forward Voltage for Series Operation
- High Speed: 40 ns Rise Times

- Copper Leadframe for Improved Thermal and Optical Characteristics


Applications

- Compatible with IrDA SIR Standard
- IR Audio
- IR Telephones
- High Speed IR Communications
IR LANs
IR Modems
IR Dongles
- Industrial IR Equipment



- IR Portable Instruments
- Interfaces with Crystal Semiconductor CS8130 Infrared Transceiver

Package Dimensions

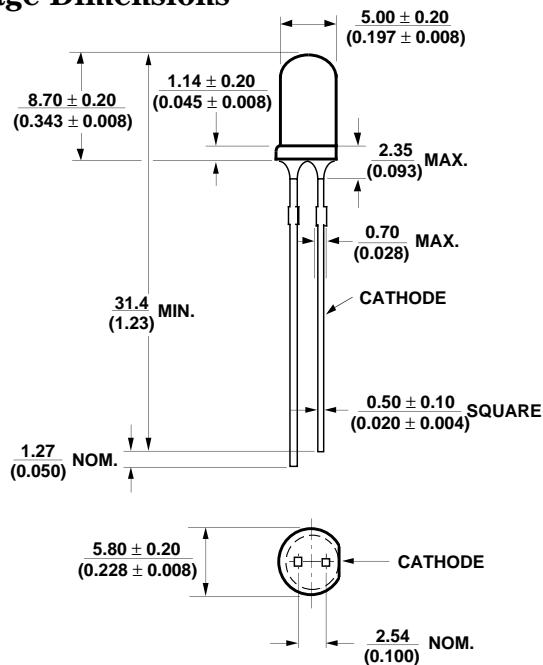

Description

The HSDL-4200 series of emitters are the first in a sequence of emitters that are aimed at high power, low forward voltage, and high speed. These emitters utilize the Transparent Substrate, double heterojunction, Aluminum Gallium Arsenide (TS AlGaAs) LED technology. These devices are optimized for speed and efficiency at emission wavelengths of 875 nm. This material produces high radiant efficiency over a wide range of currents up to 500 mA peak current. The HSDL-4200 series of emitters are available in a choice of viewing angles, the HSDL-4230 at 17° and the HSDL-4220 at 30°. Both lamps are packaged in clear T-1^{3/4} (5 mm) packages.

The package design of these emitters is optimized for efficient power dissipation. Copper leadframes are used to obtain better thermal performance than the traditional steel leadframes.

The wide angle emitter, HSDL-4220, is compatible with the IrDA SIR standard and can be used with the HSDL-1000 integrated SIR transceiver.

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit | Reference |
|---|-------------------|-----|-------------------|------|---|
| Peak Forward Current | I _{FPK} | | 500 | mA | [2], Fig. 2b Duty Factor = 20% Pulse Width = 100 µs |
| Average Forward Current | I _{FAVG} | | 100 | mA | [2] |
| DC Forward Current | I _{FDC} | | 100 | mA | [1], Fig. 2a |
| Power Dissipation | P _{DISS} | | 260 | mW | |
| Reverse Voltage (I _R = 100 µA) | V _R | 5 | | V | |
| Transient Forward Current (10 µs Pulse) | I _{FTR} | | 1.0 | A | [3] |
| Operating Temperature | T _O | 0 | 70 | °C | |
| Storage Temperature | T _S | -20 | 85 | °C | |
| LED Junction Temperature | T _J | | 110 | °C | |
| Lead Soldering Temperature [1.6 mm (0.063 in.) from body] | | | 260 for 5 seconds | °C | |

Notes:

- Derate linearly as shown in Figure 4.
- Any pulsed operation cannot exceed the Absolute Max Peak Forward Current as specified in Figure 5.
- The transient peak current is the maximum non-recurring peak current the device can withstand without damaging the LED die and the wire bonds.

Electrical Characteristics at 25°C

| Parameter | Symbol | Min | Typ | Max | Unit | Condition | Reference |
|---|-----------------------------|--------------|----------------------|--------------|-------|--|--------------------|
| Forward Voltage | V _F | 1.30 1.40 | 1.50 1.67 2.15 | 1.70 1.85 | V | I _{FDC} = 50 mA I _{FDC} = 100 mA I _{FPK} = 250 mA | Fig. 2a Fig. 2b |
| Forward Voltage Temperature Coefficient | ΔV/ΔT | | -2.1 -2.1 | | mV/°C | I _{FDC} = 50 mA I _{FDC} = 100 mA | Fig. 2c |
| Series Resistance | R _S | | 2.8 | | ohms | I _{FDC} = 100 mA | |
| Diode Capacitance | C _O | | 40 | | pF | 0 V, 1 MHz | |
| Reverse Voltage | V _R | 5 | 20 | | V | I _R = 100 µA | |
| Thermal Resistance, Junction to Pin | R _{θ_{jp}} | | 110 | | °C/W | | |

Optical Characteristics at 25°C

| Parameter | Symbol | Min | Typ | Max | Unit | Condition | Reference |
|--|-----------------------------|-----|------------------|-----|-------|---|-----------|
| Radiant Optical Power HSDL-4220 | P_O | | 19 38 | | mW | $I_{FDC} = 50 \text{ mA}$ $I_{FDC} = 100 \text{ mA}$ | |
| HSDL-4230 | P_O | | 16 32 | | mW | $I_{FDC} = 50 \text{ mA}$ $I_{FDC} = 100 \text{ mA}$ | |
| Radiant On-Axis Intensity HSDL-4220 | I_E | 22 | 38 76 190 | 60 | mW/sr | $I_{FDC} = 50 \text{ mA}$ $I_{FDC} = 100 \text{ mA}$ $I_{FPK} = 250 \text{ mA}$ | Fig. 3a |
| HSDL-4230 | I_E | 39 | 75 150 375 | 131 | mW/sr | $I_{FDC} = 50 \text{ mA}$ $I_{FDC} = 100 \text{ mA}$ $I_{FPK} = 250 \text{ mA}$ | Fig. 3b |
| Radiant On-Axis Intensity Temperature Coefficient | $\Delta I_E / \Delta T$ | | -0.35 -0.35 | | %/°C | $I_{FDC} = 50 \text{ mA}$ $I_{FDC} = 100 \text{ mA}$ | |
| Viewing Angle HSDL-4220 | $2\theta_{1/2}$ | | 30 | | deg | $I_{FDC} = 50 \text{ mA}$ | Fig. 6 |
| HSDL-4230 | $2\theta_{1/2}$ | | 17 | | deg | $I_{FDC} = 50 \text{ mA}$ | Fig. 7 |
| Peak Wavelength | λ_{PK} | 860 | 875 | 895 | nm | $I_{FDC} = 50 \text{ mA}$ | Fig. 1 |
| Peak Wavelength Temperature Coefficient | $\Delta \lambda / \Delta T$ | | 0.25 | | nm/°C | $I_{FDC} = 50 \text{ mA}$ | |
| Spectral Width—at FWHM | $\Delta \lambda$ | | 37 | | nm | $I_{FDC} = 50 \text{ mA}$ | Fig. 1 |
| Optical Rise and Fall Times, 10%-90% | t_r/t_f | | 40 | | ns | $I_{FDC} = 50 \text{ mA}$ | |
| Bandwidth | f_c | | 9 | | MHz | $I_F = 50 \text{ mA}$ $\pm 10 \text{ mA}$ | Fig. 8 |

Ordering Information

| Part Number | Lead Form | Shipping Option |
|-------------|-----------|-----------------|
| HSDL-4220 | Straight | Bulk |
| HSDL-4230 | Straight | Bulk |

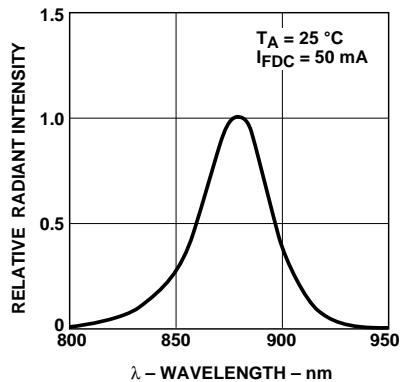


Figure 1. Relative Radiant Intensity vs. Wavelength.

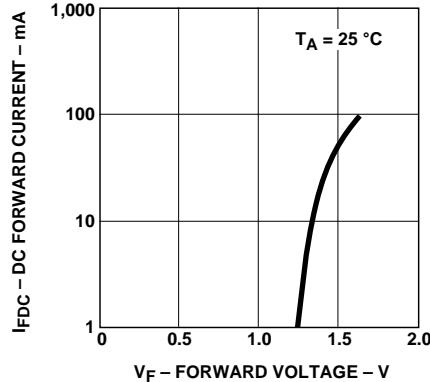


Figure 2a. DC Forward Current vs. Forward Voltage.

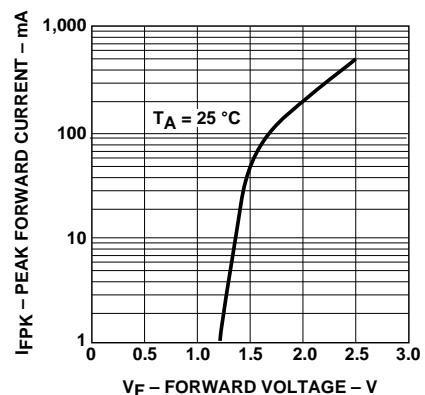


Figure 2b. Peak Forward Current vs. Forward Voltage.

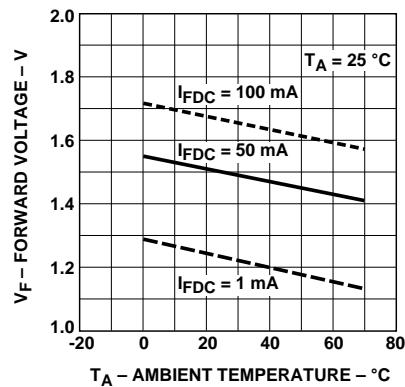


Figure 2c. Forward Voltage vs. Ambient Temperature.

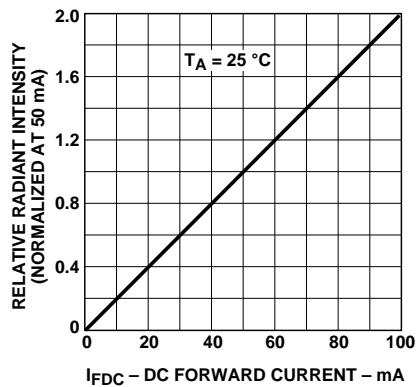


Figure 3a. Relative Radiant Intensity vs. DC Forward Current.

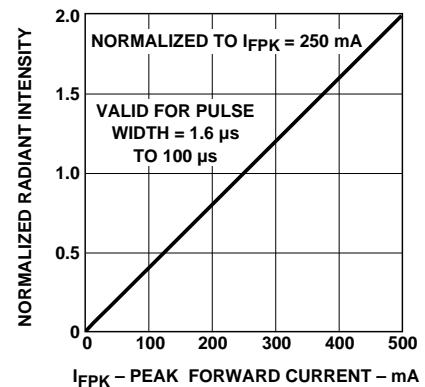


Figure 3b. Normalized Radiant Intensity vs. Peak Forward Current.

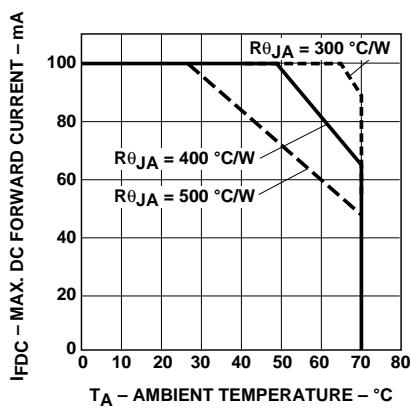


Figure 4. Maximum DC Forward Current vs. Ambient Temperature. Derated Based on $T_{JMAX} = 110^\circ\text{C}$.

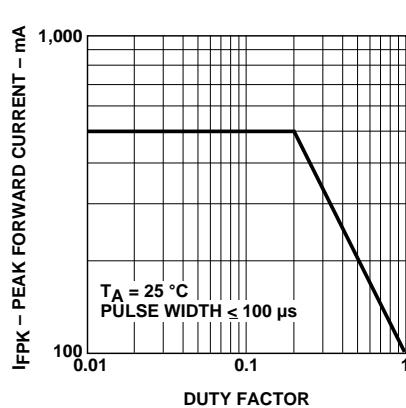


Figure 5. Maximum Peak Forward Current vs. Duty Factor.

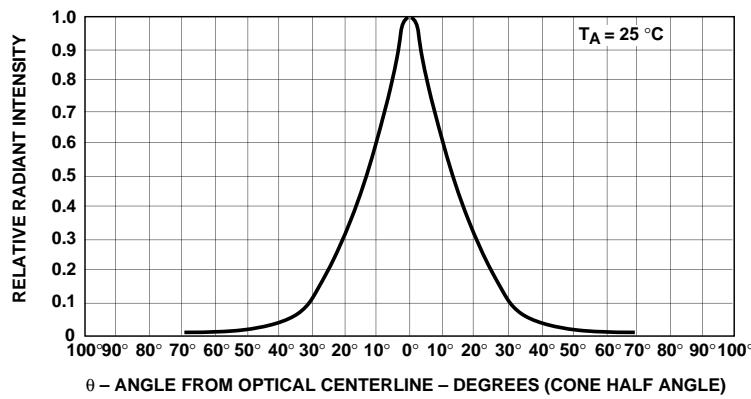


Figure 6. Relative Radiant Intensity vs.
Angular Displacement HSDL-4220.

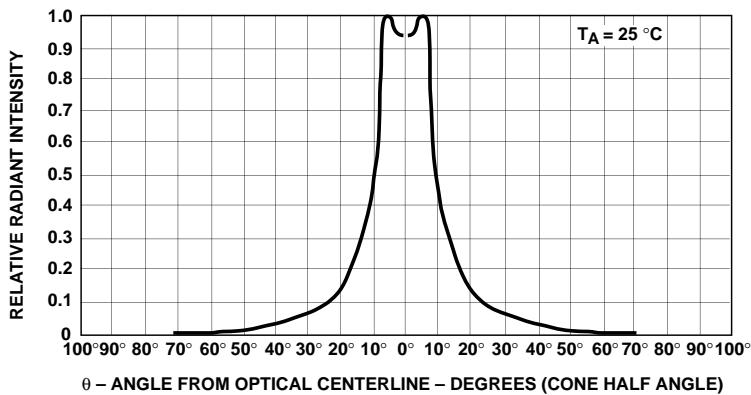


Figure 7. Relative Radiant Intensity vs.
Angular Displacement HSDL-4230.

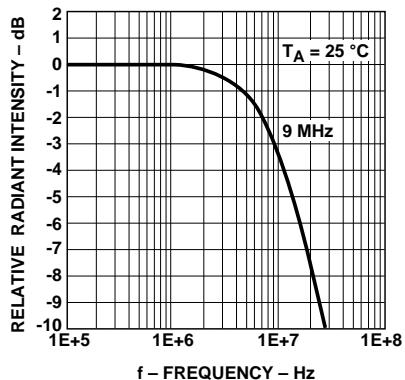


Figure 8. Relative Radiant Intensity
vs. Frequency.

Note: At the time of this publication, Light Emitting Diodes (LEDs) that are contained in this product are regulated for eye safety in Europe by the Commission for European Electrotechnical Standardization (CENELEC) EN60825-1. Please refer to Application Briefs I-008, I-009, I-015 for more information.