



晶采光電科技股份有限公司
AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AT-12864MFJ-00H
APPROVED BY	
DATE	

- ☐ Approved For Specifications
☒ Approved For Specifications & Sample

WARNING!! The contents of this document are confidential and must not be disclosed wholly or in part to any third party without the prior written consent of Ampire CO., LTD.

APPROVED BY	CHECKED BY	ORGANIZED BY

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2004/5/11	--	New Release	Spencer
2006/9/7	3	Modify Mechanical data	Tony

1 FEATURES

- (1) Display format : 128×64 dot-matrix
- (2) Construction : LCD panel, TAB IC and LED light-guide.
- (3) Display type : FSTN, Positive, Transflective, 12 o'clock view
- (4) Driver : SED1565T04
- (5) 3.3V single power input
- (6) Extended temperature type.

2 MECHANICAL DATA

Parameter	Stand Value	Unit
Dot size	0.39(W) × 0.51(H)	mm
Dot pitch	0.43(W) × 0.55(H)	mm
Viewing area	60.0(W) × 39.0(H)	mm
Module size	65.9(W) × 66.6(H) x 5.5(D)Max.	mm

3 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Min	Max	Unit
Logic Circuit Supply Voltage		VDD-VSS	0	7.0	V
LCD Driving Voltage		V0-V5	0	16.0	V
Input Voltage		Vi	VSS	VDD	V
Operating Temp.	FSTN	TOP	-20	70	°C
Storage Temp.	FSTN	TSTG	-30	80	°C


4 ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note	
----- Electronic Characteristics -----								
Logic Circuit Supply Voltage	VDD-VSS	--	2.4	3.3	3.5	V		
LCD Driving Voltage	V0-VSS	-20℃	--	8.14	--	V		
		25℃	--	9.0	--			
		70℃	--	9.34	--			
Input Voltage	VIH	--	0.7 VDD	--	VDD	V		
	VIL	--	VSS	--	0.3 VDD	V		
Logic Supply Current	IDD	VDD = 3V	--	0.2	0.5	mA		
----- Optical Characteristics -----								
Contrast	CR	25℃	--	7	--		FSTN	Note 1
Rise Time	tr	25℃	--	140	--	ms	Note 2	
Fall Time	tf	25℃	--	240	--	ms		
Viewing Angle Range	θ f	25℃ & CR≥2	--	40	--	Deg.	Note 3	
	θ b		--	35	--			
	θ l		--	35	--			
	θ r		--	35	--			
Frame Frequency	fF	25℃	--	70	--	Hz		


(NOTE 1) Contrast ratio :

CR = (Brightness in OFF state) / (Brightness in ON state)


(NOTE 2) Response time :

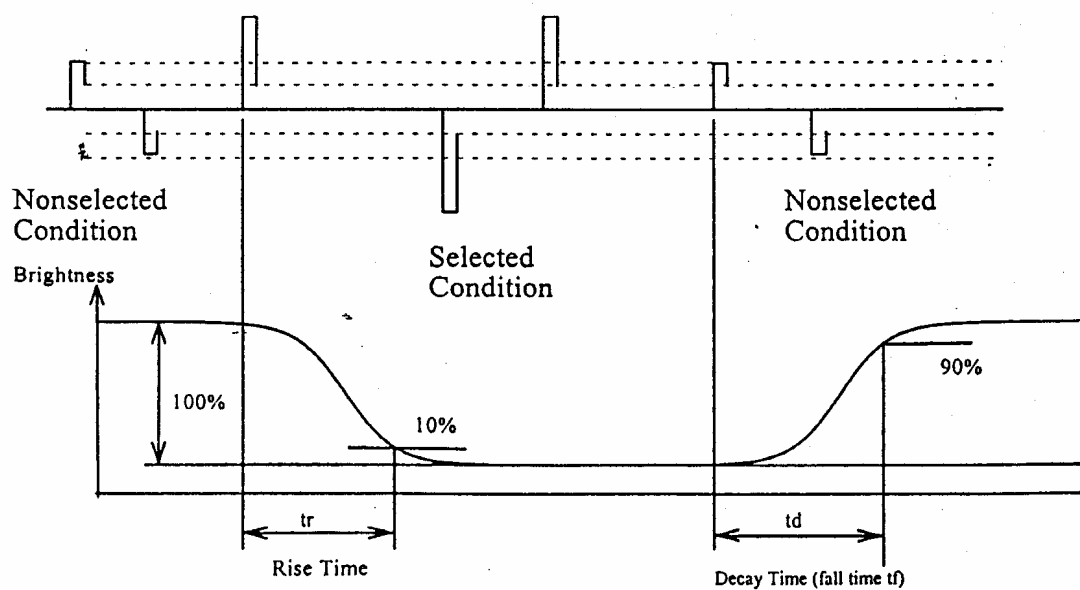

(NOTE 3) Viewing angle

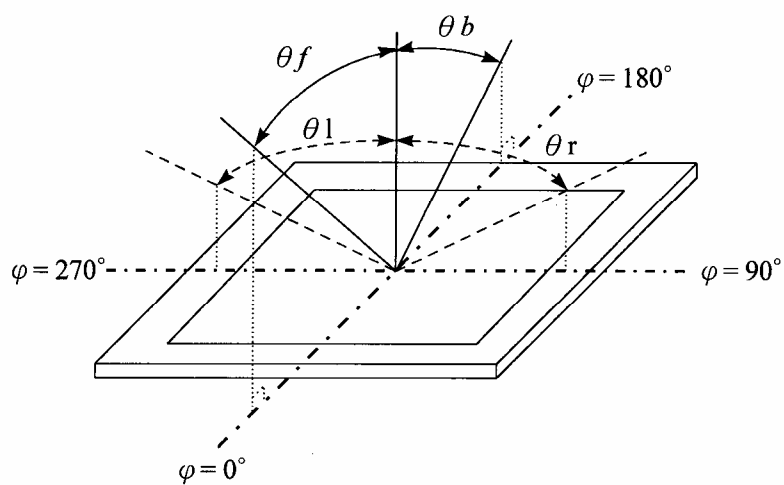

5 BLOCK DIAGRAM

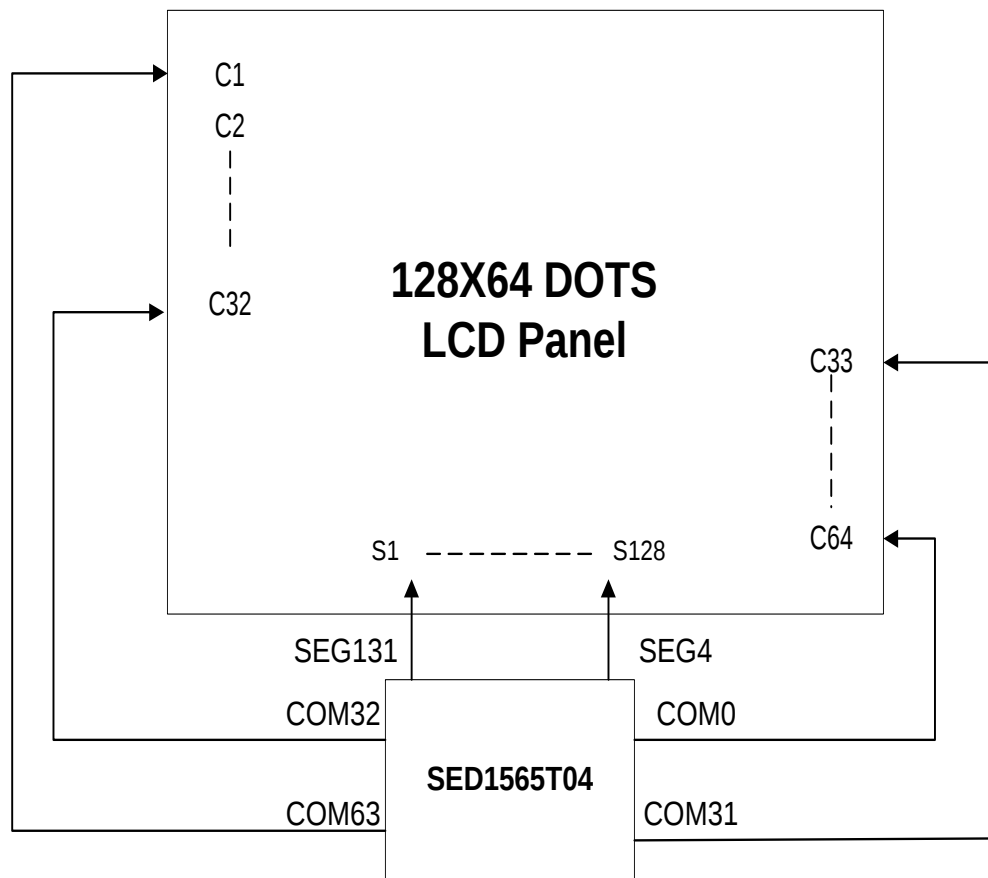

6 PIN CONNECTIONS

No.	Signal	Level	Function	
1	NC	-	Dummy	
2	FR	H/L	Alternative Signal	
3	CL	H/L	Display Clock Input	
4	/DOF	H/L	Display Off Control Signal	
5	/CS1	H/L	Chip Select Signal1	
6	CS2	H/L	Chip Select Signal2	
7	/RES	H/L	Reset Signal	
8	A0	H/L	Data/Instruction Selection Signal	
9	WR.R/W	H/L	Write Signal	
10	RD.E	H/L	Read Signal	
11	D0	H/L	Data Bus(8bit)	
12	D1	H/L		
13	D2	H/L		
14	D3	H/L		
15	D4	H/L		
16	D5	H/L		
17	D6(SCL)	H/L		Serial Clock
18	D7(SI)	H/L		Serial Data Input
19	VDD	-	Power Supply	
20	VSS	-	Ground	
21	VSS2	-	Reference Power Supply for Setup Voltage Circuit	
22	VOUT	H/L	DC/DC Voltage Converter Output	
23	CAP3-	H/L	DC/DC Voltage Converter Capacitor3-	
24	CAP1+	H/L	DC/DC Voltage Converter Capacitor1+	
25	CAP1-	H/L	DC/DC Voltage Converter Capacitor1-	
26	CAP2-	H/L	DC/DC Voltage Converter Capacitor2-	
27	CAP2+	H/L	DC/DC Voltage Converter Capacitor2+	
28	VRS	H/L	Output Voltage Regulator	
29	VDD	-	Power Supply	
30	V1	H/L	Multi Level Voltage Output1	
31	V2	H/L	Multi Level Voltage Output2	
32	V3	H/L	Multi Level Voltage Output3	
33	V4	H/L	Multi Level Voltage Output4	
34	V5	H/L	Multi Level Voltage Output5	

35	VR	H/L	Output Voltage Regulator Terminal
36	VDD	-	Power Supply
37	M/S	H/L	Master/Slave Selection
38	CLS	H/L	Clear Signal
39	C86	H/L	MPU Interface Switch terminal
40	P/S	H/L	Parallel/Serial Input Data Selection
41	HPM	H/L	Power Control Terminal
42	IRS	H/L	Select Resistors for V5 Voltage Adjust
43	NC	-	Dummy

7 QUALITY AND RELIABILITY

7.1 TEST CONDITIONS

Tests should be conducted under the following conditions :

Ambient temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $60 \pm 25\% \text{ RH}$.

7.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E, inspection level II, normal inspection, and single sampling plan tables for normal, tightened, and reduced inspection.

7.3 ACCEPTABLE QUALITY LEVEL


A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.

7.4 APPEARANCE

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under fluorescent light. The inspection area of LCD panel shall be within the range of following limits.

7.5 INSPECTION QUALITY CRITERIA

Item	Description of defects			Class of Defects	Acceptable level (%)	
Function	Short circuit or Pattern cut			Major	0.65	
Dimension	Deviation from drawings			Major	1.5	
Black spots	Ave . dia . D	area A	area B	Minor	2.5	
	D≤0.2	Disregard				
	0.2<D≤0.3	3	4			
	0.3<D≤0.4	2	3			
	0.4<D	0	1			
Black lines	Width W, Length L		A	B	Minor	2.5
	W≤0.03		disregard			
	0.03<W≤0.05		3	4		
	0.05<W≤0.07 , L≤3.0		1	1		
	See line criteria					
Bubbles in polarizer	Average diameter D 0.2 < D < 0.5 mm for N = 4 , D > 0.5 for N = 1			Minor	2.5	
Color uniformity	Rainbow color or newton ring.			Minor	2.5	
Glass Scratches	Obvious visible damage.			Minor	2.5	
Contrast ratio	See note 1			Minor	2.5	
Response time	See note 2			Minor	2.5	
Viewing angle	See note 3			Minor	2.5	

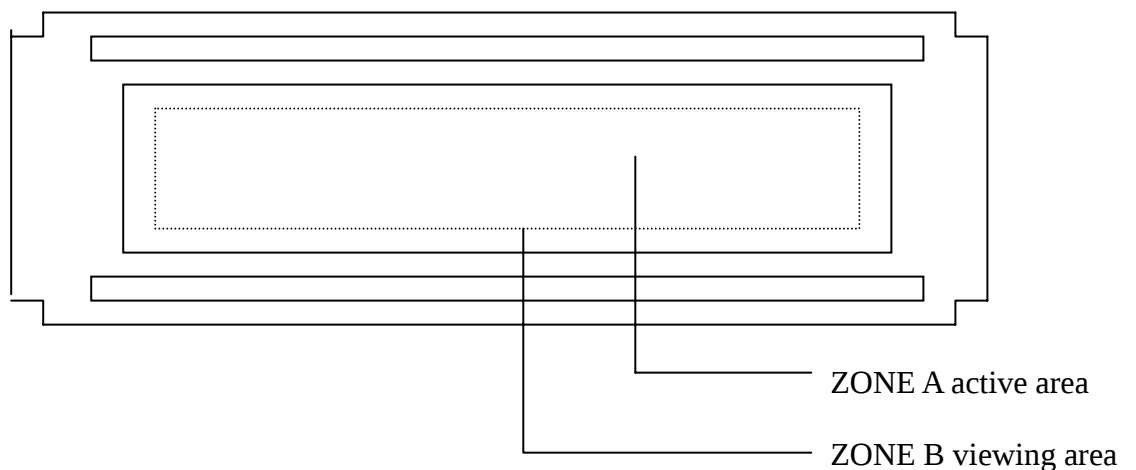

7.6 RELIABILITY

Test Item	Test Conditions		Note
	Normal Temp. type	Extended Temp. type	
High Temperature Operation	50±3°C , t=96 hrs	70±3°C , t=96 hrs	
Low Temperature Operation	0±3°C , t=96 hrs	-20±3°C , t=96 hrs	
High Temperature Storage	70±3°C , t=96 hrs	80±3°C , t=96 hrs	1,2
Low Temperature Storage	-20±3°C , t=96 hrs	-30±3°C , t=96 hrs	1,2
Thermal Shock Test	-20°C ~ 25°C ~ 70°C 30 m in. 5 min. 30 min. (1 cycle) Total 5 cycle	-30°C ~ 25°C ~ 80°C 30 min. 5 min. 30 min. (1 cycle) Total 5 cycle	1,2
Humidity Test	40 °C, Humidity 90%, 96 hrs		1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis		2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions
(15-35°C , 45-65%RH).

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

8 HANDLING PRECAUTIONS

- (1) An LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in color.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.
- (10) Protect the module against static electricity and observe appropriate anti-static precautions.

9 OUTLINE DIMENSION

