


# PRODUCT SPECIFICATION

*RoHS Compliance*


DATE : 01/25/2008

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 1 OF 7	

## ● OUTSIDE DIMENSION :

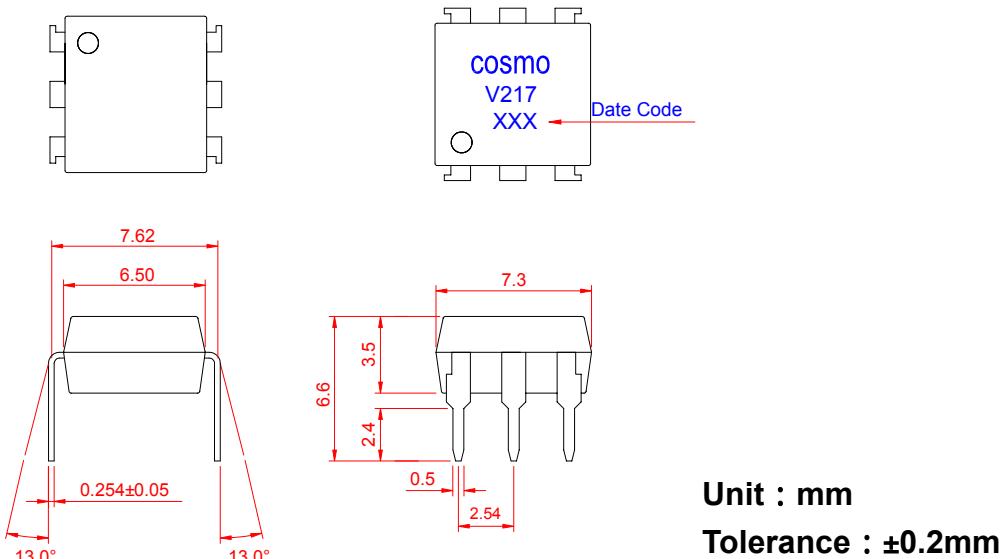

## ● Turn On / Turn Off time

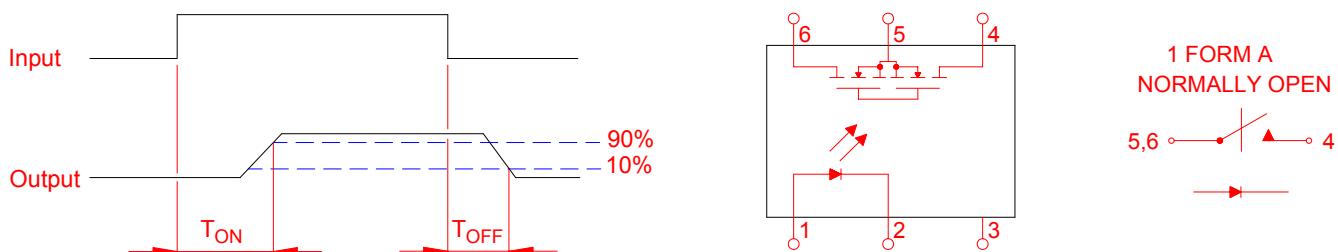

## ● Absolute Maximum Ratings

( Ta=25 )

Emitter ( Input )	Detector ( Output )
Reverse Voltage ..... 5.0V	Output Breakdown Voltage ..... ± 200V
Continuous Forward Current ..... 50mA	Continuous Load Current ..... ± 180mA
Peak Forward Current ..... 1A	Power Dissipation ..... 500mW
Power Dissipation ..... 100mW	
Derate Linearly from 25 ..... 1.3mW/	

## General Characteristics

Isolation Test Voltage ..... 5000VACrms	Storage Temperature Range ..... -40 to +125
Isolation Resistance ..... Vio=500V , Ta=25 ..... 10 <sup>10</sup> Ω	Operating Temperature Range ... -40 to +85
	Junction Temperature ..... 100
Total Power Dissipation ..... 550mW	Soldering Temperature ,
Derate Linearly from 25 ..... 2.5mW/	2mm from case , 10 sec ..... 260

# PRODUCT SPECIFICATION

*RoHS Compliance*

DATE : 01/25/2008

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 2 OF 7	

## ● Electro-optical Characteristics ( Ta=25 )

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter ( Input )						
Forward Voltage	$V_F$	$I_F=10\text{mA}$		1.2	1.5	V
Operation Input Current	$I_{FON}$	$V_L=\pm 20\text{V}$ , $I_L=100\text{mA}$ , $t=10\text{ms}$			5.0	mA
Recovery Input Current	$I_{FOFF}$	$V_L=\pm 20\text{V}$ , $I_L=5\mu\text{A}$	0.2			mA
Detector ( Output )						
Output Breakdown Voltage	$V_B$	$I_B=50\mu\text{A}$	200			V
Output Off-State Leakage	$I_{TOFF}$	$V_T=200\text{V}$ , $I_F=0\text{mA}$		0.2	1	$\mu\text{A}$
I/O Capacitance	$C_{ISO}$	$I_F=0$ , $f=1\text{MHz}$		6		pF
ON Resistance	Connection	$R_{ON}$	$I_L=100\text{mA}$ , $I_F=10\text{mA}$	6	15	
				3	8	
				1.5	4	
Turn-On Time	$T_{ON}$	$I_F=10\text{mA}$ , $V_L=\pm 20\text{V}$ $t=10\text{ms}$ , $I_L=\pm 100\text{mA}$		0.3	1.0	ms
Turn-Off Time	$T_{OFF}$			0.7	1.5	ms

## ● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
		AC/DC	A	
	1a	DC	B	
		DC	C	

# PRODUCT SPECIFICATION

*RoHS Compliance*

DATE : 01/25/2008


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 3 OF 7	

## ● Data Curve

Load current vs. ambient temperature

Allowable ambient Temperature :

-40 to +85

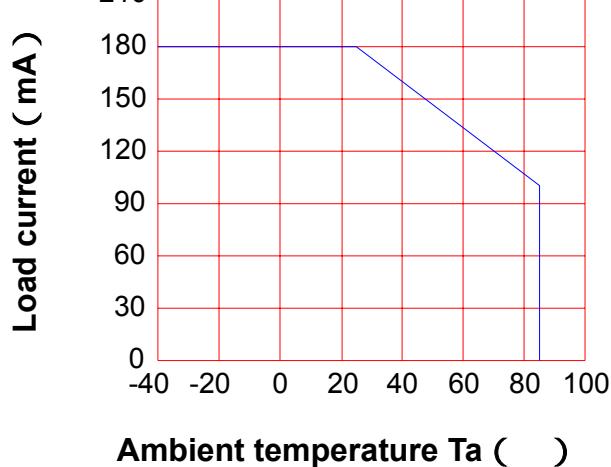


On resistance vs. ambient temperature

across terminals 4 and 6 pin

LED current : 5mA

Continuous load current : 180mA ( DC )

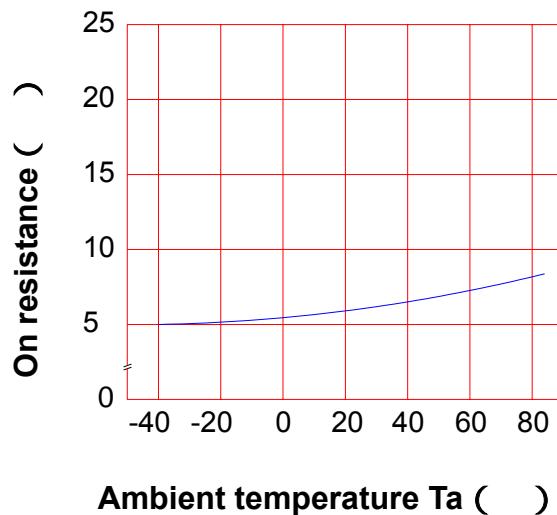


Turn On Time vs. ambient temperature

Load voltage 200V ( DC )

LED current : 5mA

Continuous load current : 180mA ( DC )

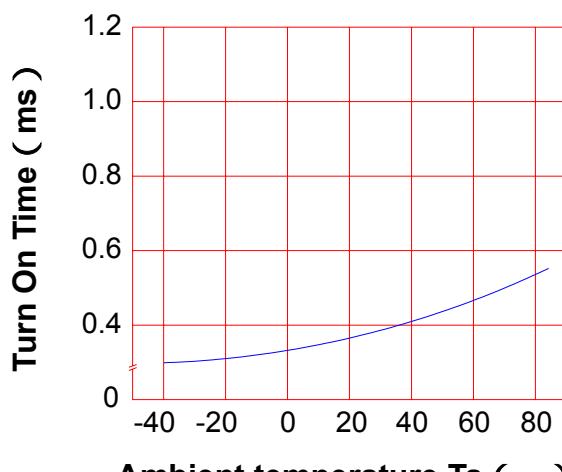


Turn Off Time vs. ambient temperature

Load voltage 200V ( DC )

LED current : 5mA

Continuous load current : 180mA ( DC )

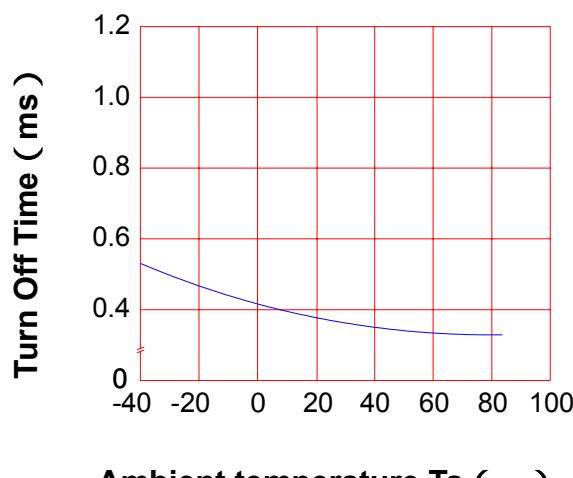


# PRODUCT SPECIFICATION

*RoHS Compliance*


DATE : 01/25/2008

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 4 OF 7	


LED operate current vs.  
ambient temperature  
Load Voltage : 200V ( DC )  
Continuous load current : 180mA ( DC )

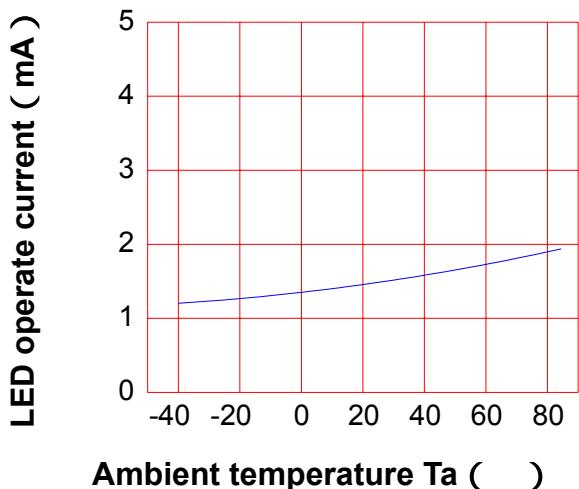


LED Turn Off current vs.  
ambient temperature  
Load Voltage : 200V ( DC )  
Continuous load current : 180mA ( DC )

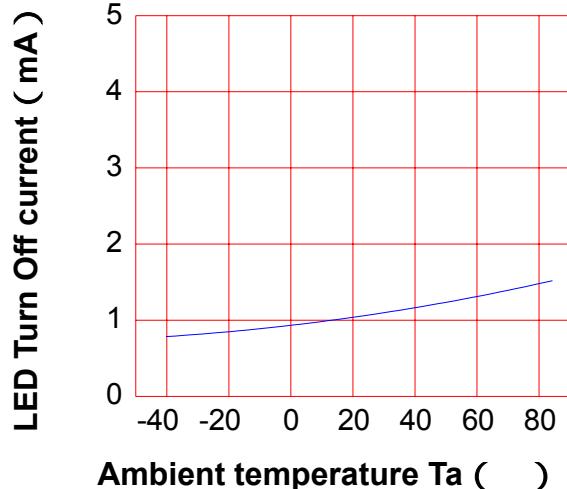

LED dropout voltage vs.  
ambient temperature  
LED current : 5 to 50mA

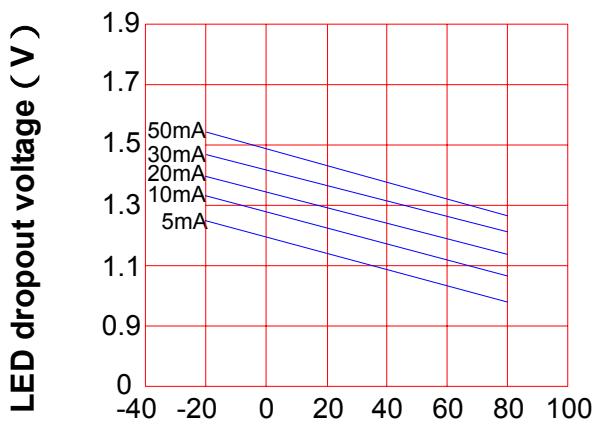

Voltage vs. current characteristics  
of output at MOSFET portion  
Measured portion : across terminals  
4 and 6 pin  
Ambient temperature : 25

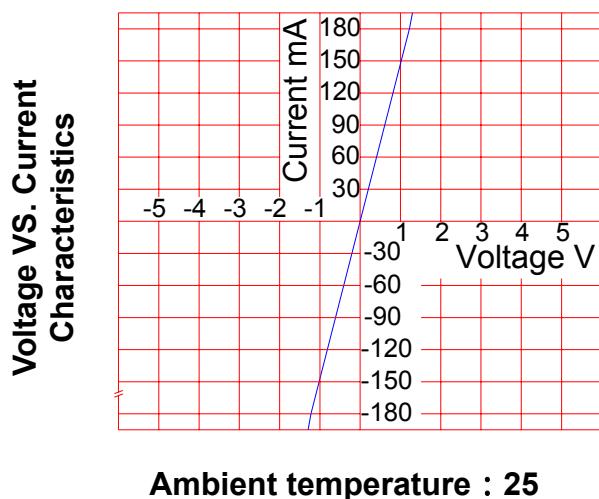

Ambient temperature : 25

# PRODUCT SPECIFICATION

*RoHS Compliance*

DATE : 01/25/2008

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
SHEET 5 OF 7			


## LED forward current vs. Turn On Time

Across terminals 4 and 6pin

Load voltage : 200V ( DC )

Continuous load current : 180mA ( DC )


Ambient temperature : 25

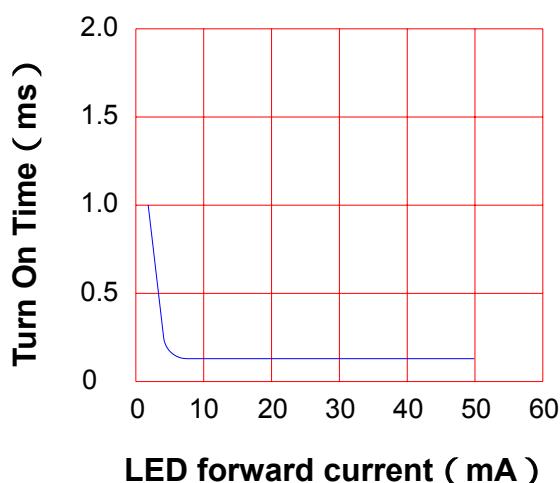

## Off state leakage current

Across terminals 4and 6 pin

Ambient temperature : 25

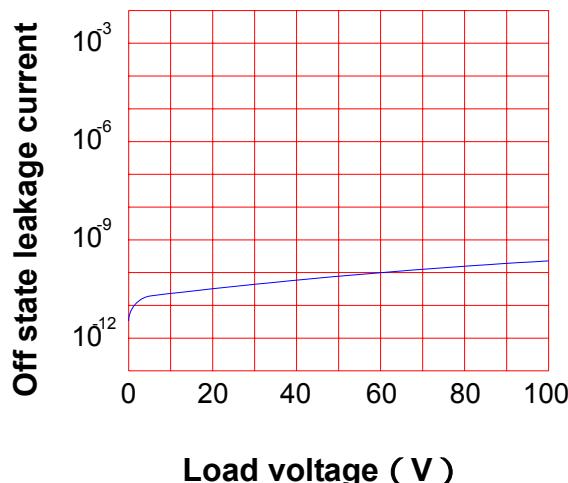


## LED forward current vs. reverse(ON) time

Across terminals 4 and 6 pin

Load voltage : 200V ( DC )

Continuous load current : 180mA ( DC )

Ambient temperature : 25

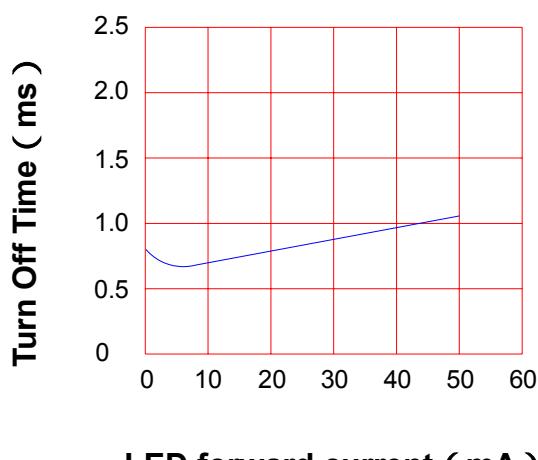


## Applied voltage vs. output capacitance

Across terminals 4 and 6 pin

Frequency : 1MHz

Ambient temperature : 25

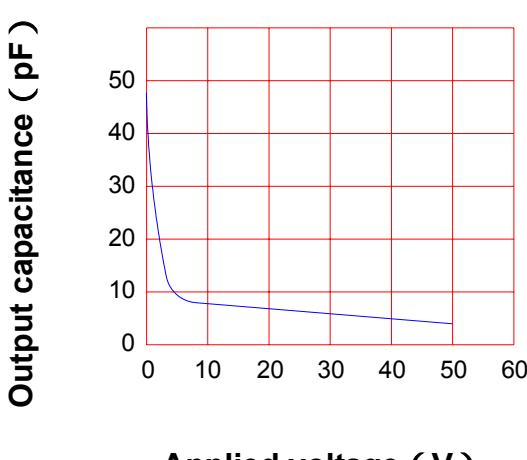

# PRODUCT SPECIFICATION

RoHS Compliance

DATE : 01/25/2008


<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 6 OF 7	

## ● USING METHODS

Examples of resistance value to control LED forward current ( IF )


SSR-MOSFET OUTPUT

( IF=5mA )

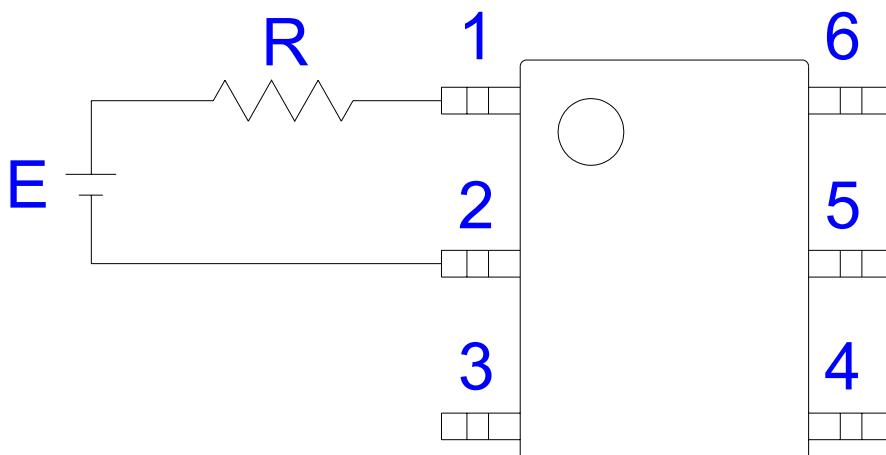

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- ( 1 ) LED forward current must be more than 5mA , at E min.
- ( 2 ) LED forward current must be less than 50mA , at E max.

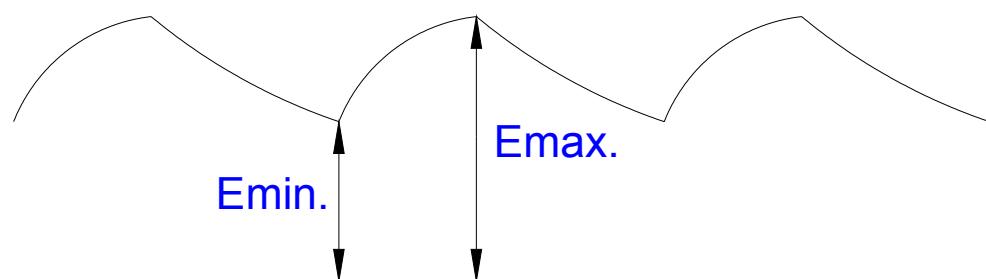

# PRODUCT SPECIFICATION



RoHS Compliance

DATE : 01/25/2008

<b>cosmo</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQV217</b>	NO.60M10016	REV. 2
		SHEET 7 OF 7	

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

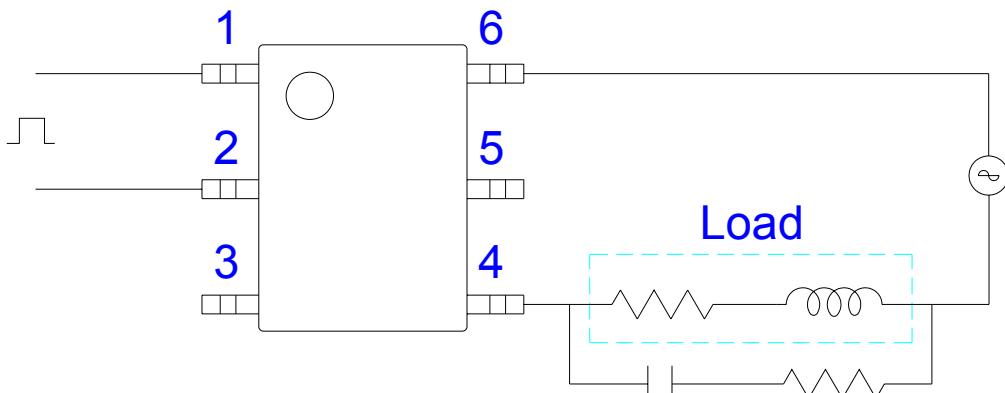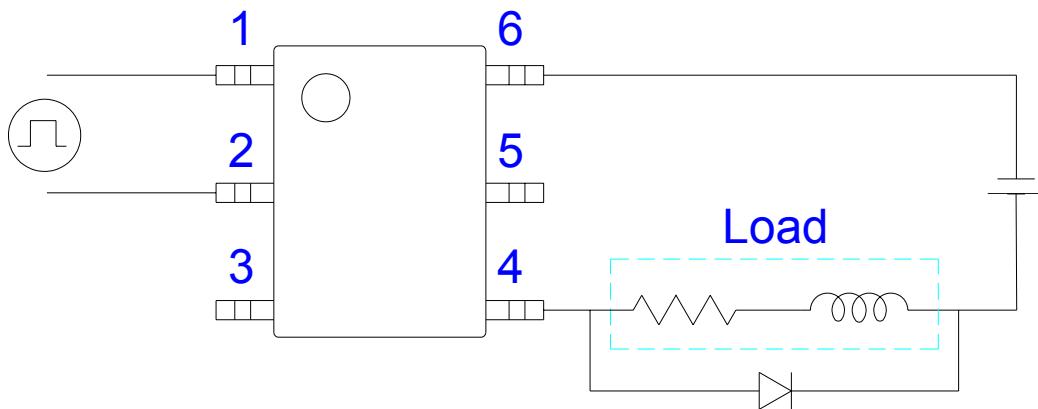

R-C Snubber