


# PRODUCT SPECIFICATION

DATE : 09/01/2006

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
		SHEET 1 OF 7	



## ● OUTSIDE DIMENSION :

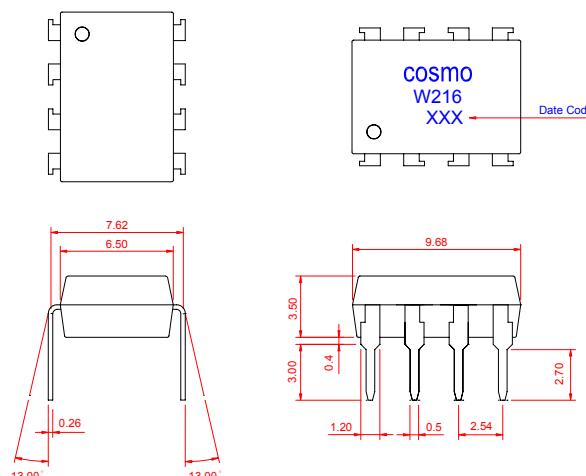

Unit : mm

Tolerance : ±0.2mm

## ● Turn On / Turn Off time

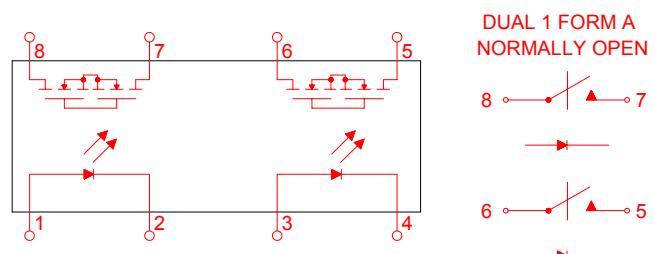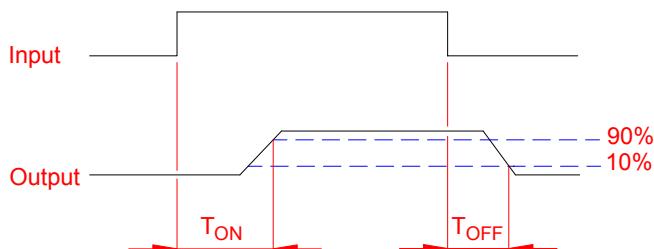

## ● Absolute Maximum Ratings

( Ta=25°C )

Emitter (Input)	Detector (Output)
Reverse Voltage ..... 5.0V	Output Breakdown Voltage ..... ± 600V
Continuous Forward Current ..... 50mA	Continuous Load Current ..... ± 120mA
Peak Forward Current ..... 1A	Power Dissipation ..... 500mW
Power Dissipation ..... 100mW	
Derate Linearly from 25°C ..... 1.3mW/°C	

## General Characteristics

Isolation Test Voltage ..... 5000VACrms	Storage Temperature Range ..... -40°C to +125°C
Isolation Resistance ..... Vio=500V, Ta=25°C ..... $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
	Junction Temperature ..... 100°C
Total Power Dissipation ..... 550mW	Soldering Temperature ,
Derate Linearly from 25°C ..... 2.5mW/°C	2mm from case , 10 sec ..... 260°C

# PRODUCT SPECIFICATION

DATE : 09/01/2006




<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
		SHEET 2 OF 7	

## ● Electro-optical Characteristics

( Ta=25°C )

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Emitter ( Input )						
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10mA		1.2	1.5	V
Operation Input Current	I <sub>FON</sub>	V <sub>L</sub> =±20V , I <sub>L</sub> =100mA , t=10ms			5.0	mA
Recovery Input Current	I <sub>FOFF</sub>	V <sub>L</sub> =±20V , I <sub>L</sub> ≤5μA	0.2			mA
Detector ( Output )						
Output Breakdown Voltage	V <sub>B</sub>	I <sub>B</sub> =50μA	600			V
Output Off-State Leakage	I <sub>TOFF</sub>	V <sub>T</sub> =100V , I <sub>F</sub> =0mA		0.2	1	μA
I/O Capacitance	C <sub>ISO</sub>	I <sub>F</sub> =0 , f=1MHz		6		pF
ON Resistance	R <sub>ON</sub>	I <sub>L</sub> =100mA , I <sub>F</sub> =10mA		35	50	Ω
Turn-On Time	T <sub>ON</sub>	I <sub>F</sub> =10mA , V <sub>L</sub> =±20V t=10ms , I <sub>L</sub> =±100mA		0.3	1.0	ms
Turn-Off Time	T <sub>OFF</sub>			0.5	1.5	ms

## ● Schematic and Wiring Diagrams

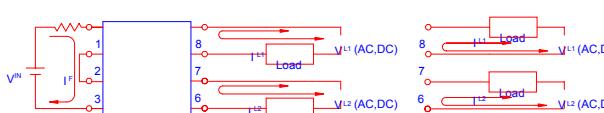Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	2a	AC/DC	-	<p>( 1 ) Two Independent 1 Form A use</p>  <p>( 2 ) 2 Form A use</p> 

# PRODUCT SPECIFICATION

DATE : 09/01/2006


<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
		SHEET 3 OF 7	

## ● Data Curve

Load current vs. ambient temperature

Allowable ambient Temperature :

-40°C to +85°C

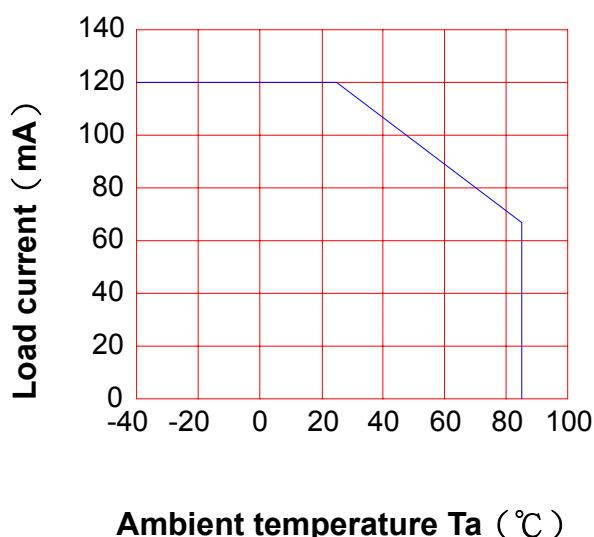


Ambient temperature Ta (°C)

On resistance vs. ambient temperature across terminals 5,7 and 6,8 pin

LED current : 5mA

Continuous load current : 120mA (DC)

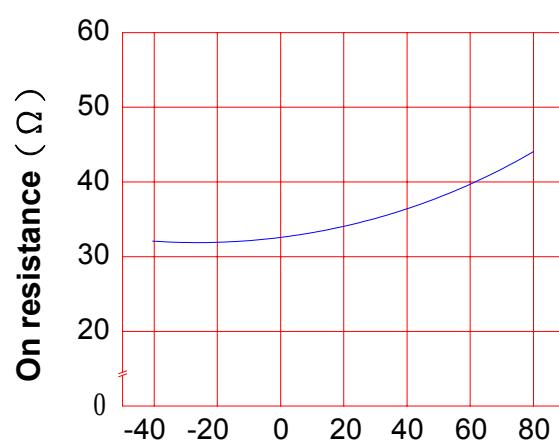


Ambient temperature Ta (°C)

Turn On Time vs. ambient temperature

Load voltage 600V (DC)

LED current : 5mA

Continuous load current : 120mA (DC)

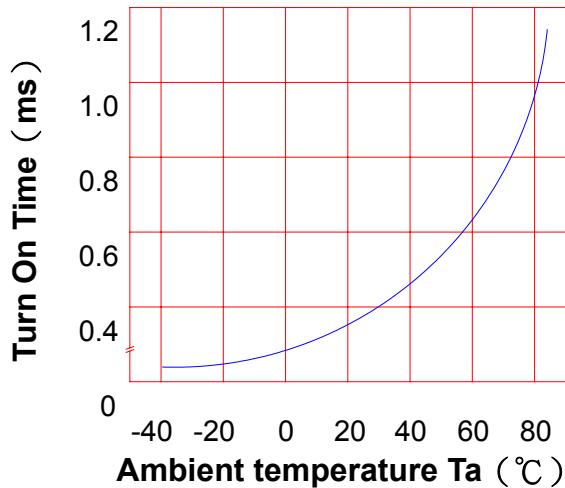


Ambient temperature Ta (°C)

Turn Off Time vs. ambient temperature

Load voltage 600V (DC)

LED current : 5mA

Continuous load current : 120mA (DC)

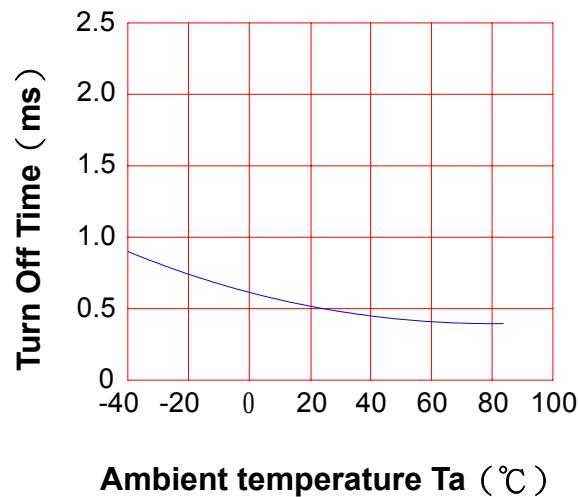


Ambient temperature Ta (°C)

# PRODUCT SPECIFICATION

DATE : 09/01/2006


<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
SHEET 4 OF 7			

LED operate current vs.  
ambient temperature  
Load Voltage : 600V (DC)  
Continuous load current : 120mA (DC)

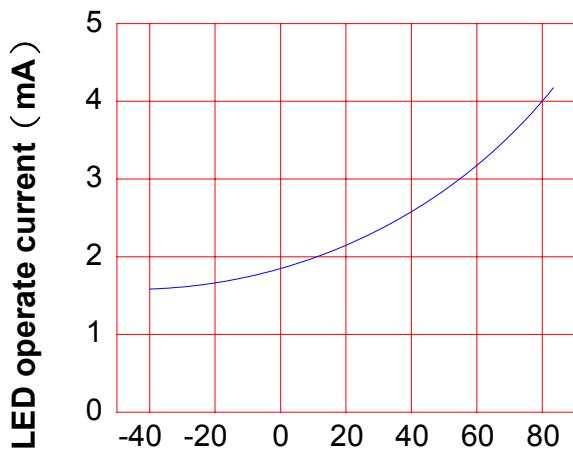


Ambient temperature Ta (°C)

LED Turn Off current vs.  
ambient temperature  
Load Voltage : 600V (DC)  
Continuous load current : 120mA (DC)

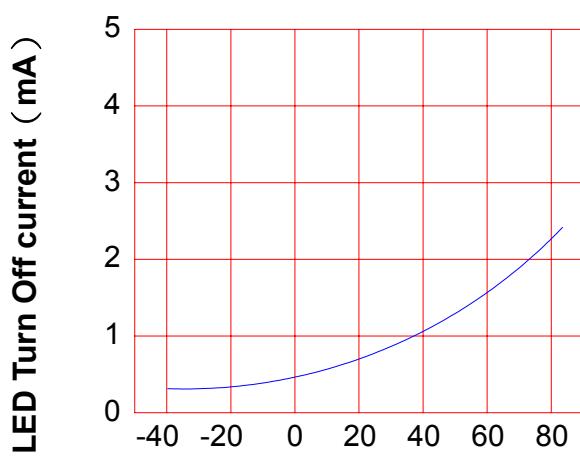


Ambient temperature Ta (°C)

LED dropout voltage vs.  
ambient temperature  
LED current : 5 to 50mA

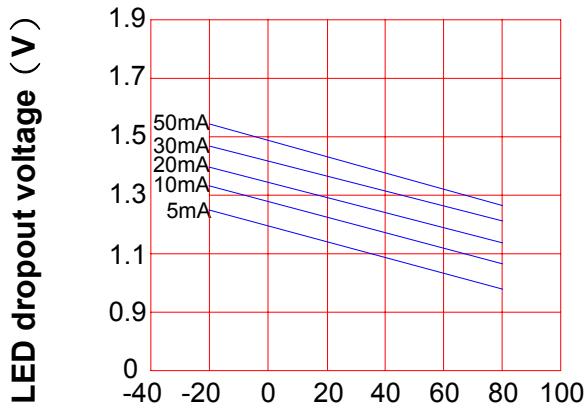

Ambient temperature Ta (°C)

Voltage vs. current characteristics  
of output at MOSFET portion  
Measured portion : across terminals  
5,7 and 6,8 pin  
Ambient temperature : 25°C

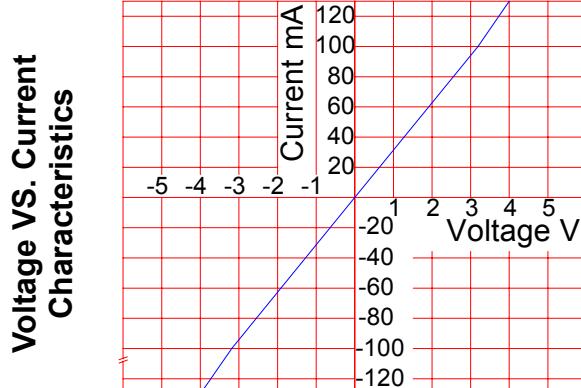

Ambient temperature : 25°C

# PRODUCT SPECIFICATION

DATE : 09/01/2006

<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
		SHEET 5 OF 7	


**LED forward current vs. Turn On Time**

Across terminals 5,7 and 6,8 pin


Load voltage : 600V (DC)

Continuous load current : 120mA (DC)

Ambient temperature : 25°C

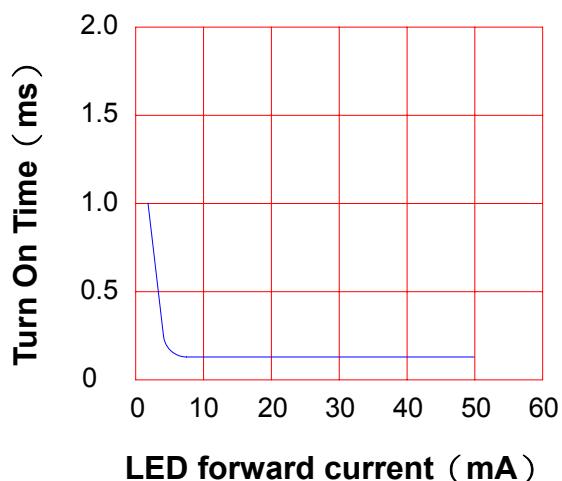

**Off state leakage current**  
Across terminals 5,7 and 6,8 pin  
Ambient temperature : 25°C

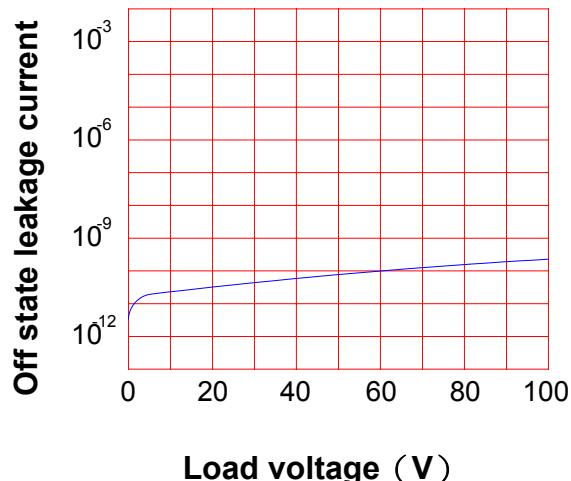


**LED forward current vs. reverse(ON) time**

Across terminals 5,7 and 6,8 pin


Load voltage : 600V (DC)

Continuous load current : 120mA (DC)

Ambient temperature : 25°C

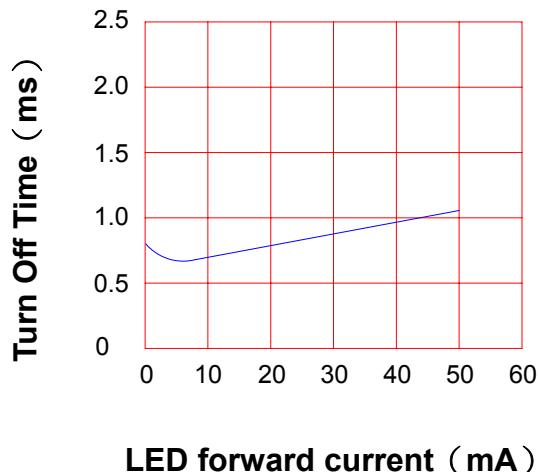

**Applied voltage vs. output capacitance**  
Across terminals 5,7 and 6,8 pin  
Frequency : 1MHz  
Ambient temperature : 25°C

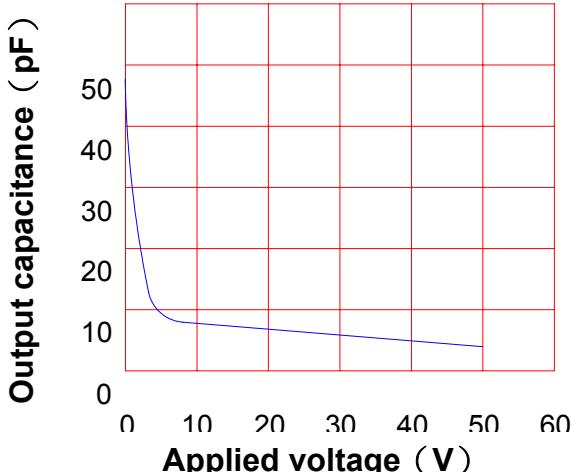

# PRODUCT SPECIFICATION

DATE : 09/01/2006


<b>COSMO</b> ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT <b>KAQW216</b>	NO.60M20024	REV. 1
		SHEET 6 OF 7	

## ● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

( IF=5mA )

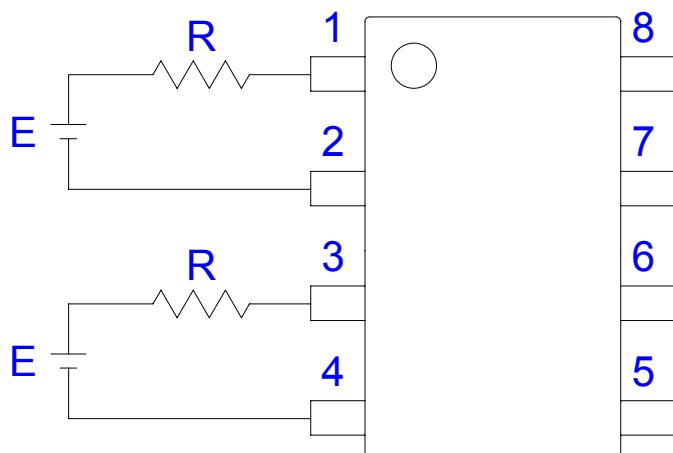

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

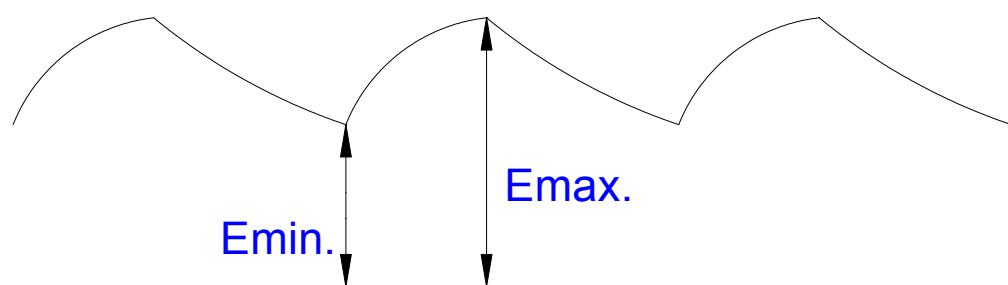

# PRODUCT SPECIFICATION

DATE : 09/01/2006

**cosmo**  
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT  
**KAQW216**

NO.60M20024  
SHEET 7 OF 7

REV.  
1

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

