

DISPLAY Elektronik GmbH

DATA SHEET

LCD MODULE

DEM 16102 SYH-CYR22

Product specification

Version : 0

12/Mar/2007

GENERAL SPECIFICATION

MODULE NO. :

DEM 16102 SYH-CYR22

CUSTOMER P/N

VERSION NO.	CHANGE DESCRIPTION	DATE
0	ORIGINAL VERSION	12/03/2007

PREPARED BY: LMM

DATE: 12/03/2007

APPROVED BY: MH

DATE: 12/03/2007

CONTENTS

1. FUNCTIONS & FEATURES	2
2. MECHANICAL SPECIFICATIONS.....	2
3. EXTERNAL DIMENSIONS.....	2
4. BLOCK DIAGRAM.....	3
5. PIN ASSIGNMENT.....	3
6. PCB DRAWING AND DESCRIPTION	4
7. DISPLAY DATA RAM (DDRAM)	5
8. MAXIMUM ABSOLUTE POWER RATINGS (TA=-25°C).....	5
9. ELECTRICAL CHARACTERISTICS	6
10. CONTROL AND DISPLAY COMMAND.....	8
11. STANDARD CHARACTER PATTERN (S6A0069-22)	9
12. LCM INITIALIZING BY INSTRUCTION	10
13. LCD MODULES HANDLING PRECAUTIONS.....	12
14. OTHERS.....	12

1. FUNCTIONS & FEATURES


MODULE NAME	LCD TYPE	REMARK
DEM 16102 SYH-CYR22	STN Yellow-Green Reflective Positive Mode	ROHS Conformed

- Viewing Direction : 6° clock
- Driving Scheme : 1/16 Duty Cycle, 1/5 Bias
- Power Supply Voltage : 5.0 Volt (typ.)
- $V_{LCD} (V_{DD}-V_0)$: 4.5 Volt (typ.)
- Operating Temperature : -20°C to +70°C
- Storage Temperature : -25°C to +75°C
- Display contents : 16x1Characters (5x8 dots Format: 204 Kinds)
- Driver IC : S6A0069-22 (Cyrillic font)
- Internal Memory : CGROM (10,080 bits)
: CGRAM (64 x 8 bits)
: DDRAM (80 x 8 bits for Digits)
- Interface : Easy Interface with a 4-bit or 8-bit MPU


2. MECHANICAL SPECIFICATIONS

- Module Size : 80.00 x 36.00 x 8.30 mm
- Dot Size : 0.55 x 0.90 mm
- Dot Gap : 0.10 mm

3. EXTERNAL DIMENSIONS

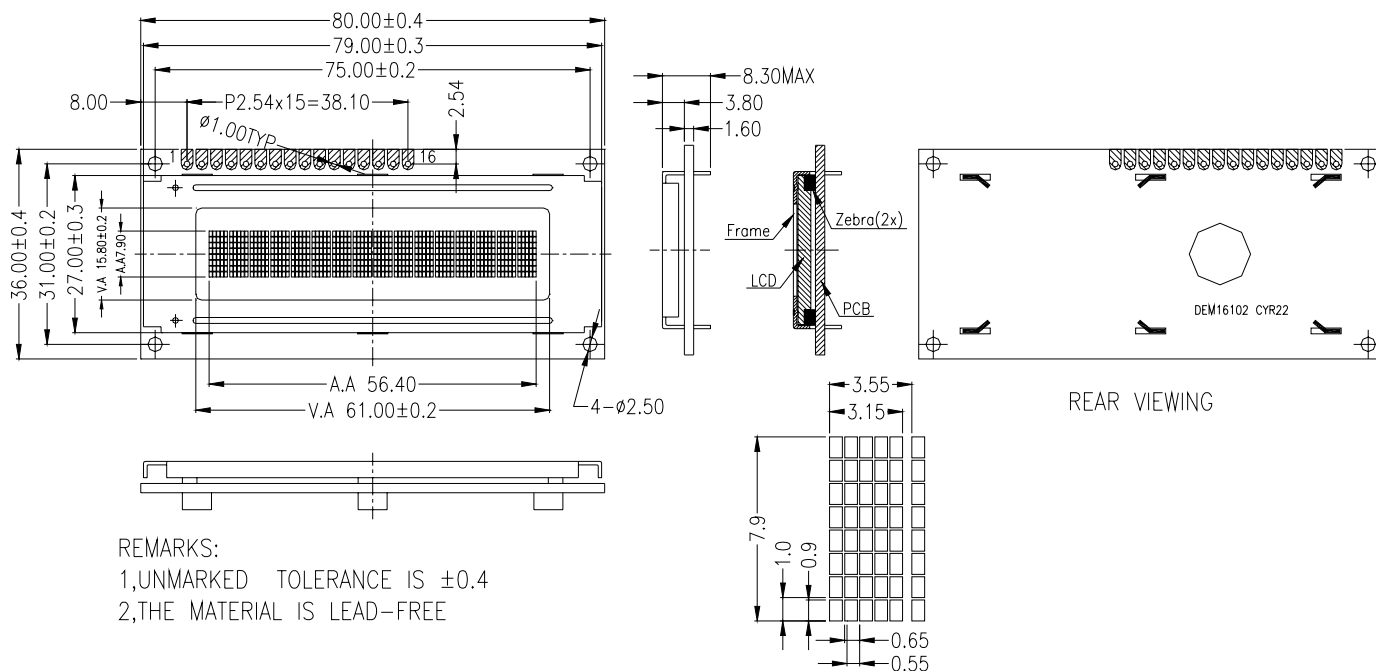


4. BLOCK DIAGRAM

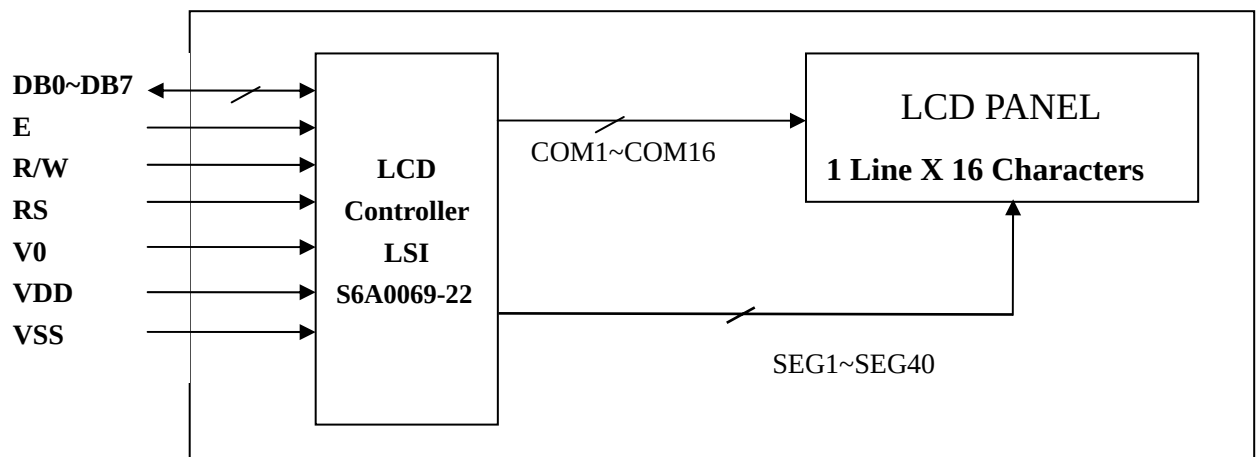

5. PIN ASSIGNMENT

Pin No.	Symbol	Function
1	V _{SS}	Ground
2	V _{DD}	Supply terminal of module +5V
3	V ₀	Power Supply for Liquid Crystal Drive
4	RS	Select Display Data ("1") or Instructions ("0")
5	R/W	Read or Write Select Signal
6	E	Read/Write Enable Signal
7	DB0	Display Data Signal
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	
13	DB6	
14	DB7	
15	LED-(K)	Not Used
16	LED+(A)	

6. PCB DRAWING AND DESCRIPTION

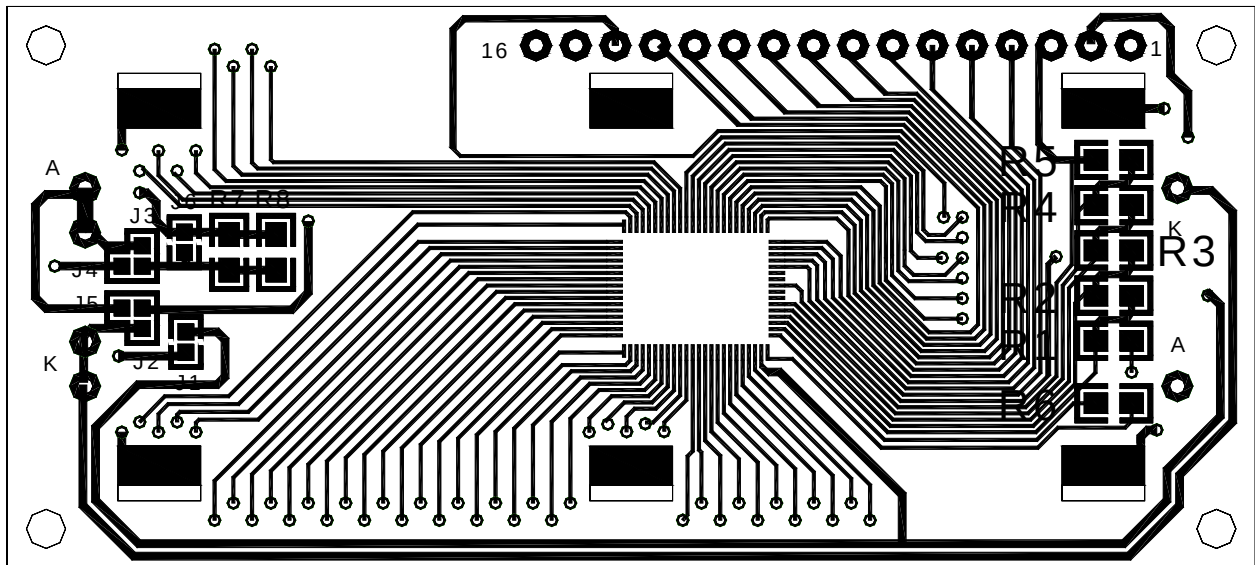


6.1 DESCRIPTION:

6-1-1. The metal-bezel should be on ground when the J1 is Solder-Bridge


Note: In application module, J1=0 Ω

6.2 Example application

6-2-1. The metal-bezel is on ground as following.



6.3 The Module Number Printed on the PCB.

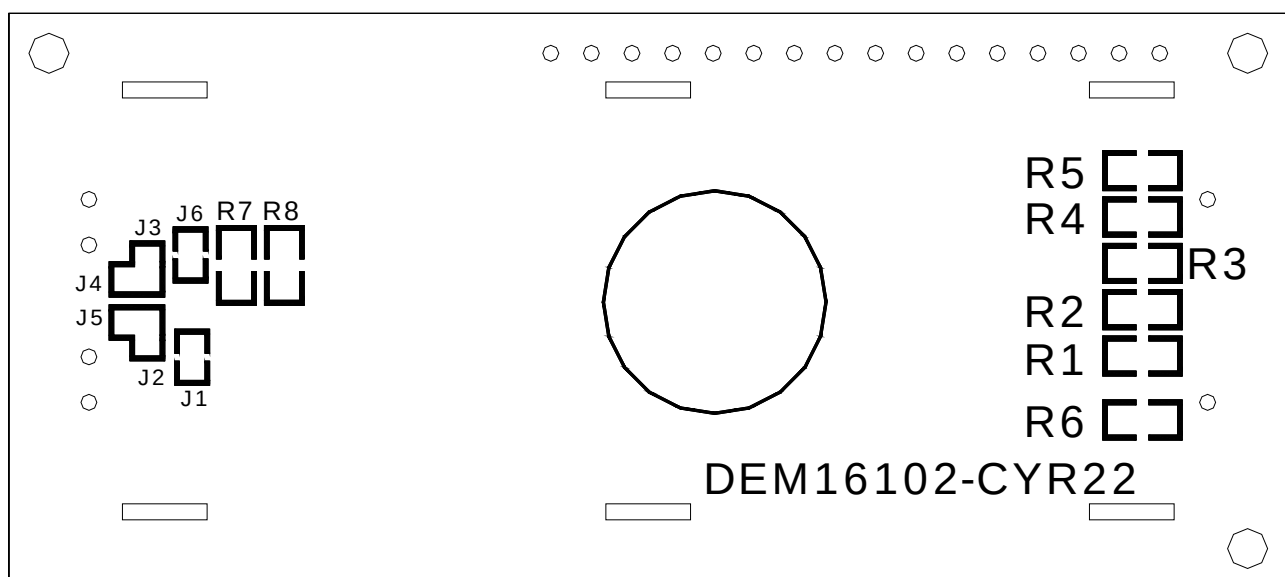

7. DISPLAY DATA RAM (DDRAM)

FIRST LINE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	← Display Position
	00	01	02	03	04	05	06	07	40	41	42	43	44	45	46	47	← DDRAM Address

8. MAXIMUM ABSOLUTE POWER RATINGS (Ta = -25°C)

Item	Symbol	Standard value	Unit
Power supply voltage (1)	V _{DD}	-0.3 ~ +7.0	V
Power supply voltage (2)	V _{LCD}	V _{DD} -13.5 ~ V _{DD} +0.3	V
Input voltage	V _{IN}	-0.3 ~ V _{DD} +0.3	V
Operating temperature	T _{opr}	-20 ~ +70	°C
Storage temperature	T _{stg}	-25 ~ +75	°C

9. ELECTRICAL CHARACTERISTICS


9-1 DC Characteristics ($V_{DD} = 4.5V \sim 5.5V$)

Item	Symbol	Standard Value			Test Condition	Unit
		MIN	TYP	MAX		
Operating Voltage	V_{DD}	4.5	5	5.5	-----	V
Supply Current	I_{DD}	----	0.35	0.6	$V_{DD}=5V, f_{osc}=270kHz$	mA
LCD Driving Voltage	V_{LCD}	3.0	4.5	13.0	$V_{DD}-V_0$	V

9-2 AC Characteristics ($V_{DD} = 4.5V \sim 5.5V$)


9-2-1 Write mode (writing data from MPU to module)

Characteristic	Symbol	Min	Typ	Max	Unit	Test PIN
E Cycle Time	t_C	500	---	---	ns	E
E Rise Time	t_R	---	---	20	ns	E
E Fall Time	t_F	---	---	20	ns	E
E Pulse width (High, Low)	t_W	230	---	---	ns	E
R/W and RS Set-up Time	t_{SU1}	40	---	---	ns	R/W,RS
R/W and RS Hold Time	t_{H1}	10	---	---	ns	R/W,RS
Data Set-up Time	t_{SU2}	80	---	---	ns	DB0~DB7
Data Hold Time	t_{H2}	10	---	---	ns	DB0~DB7

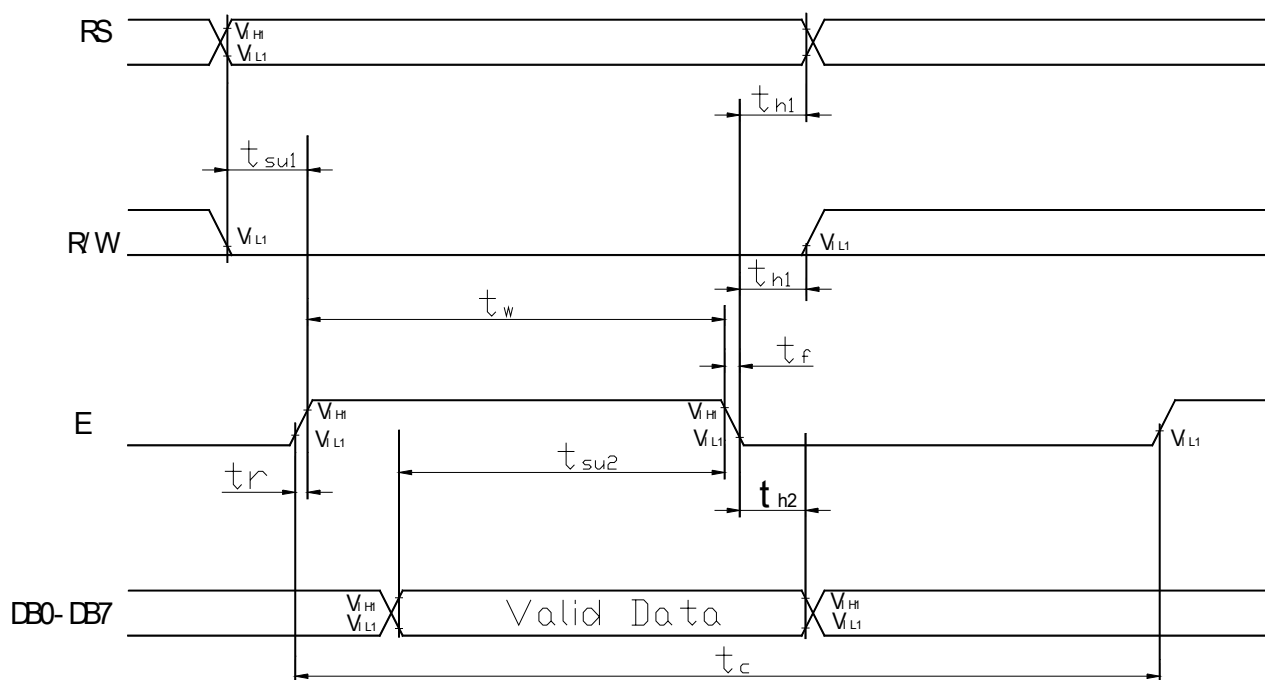

9-2-2 Read mode (reading data from module to MPU)

Characteristic	Symbol	Min	Typ	Max	Unit	Test PIN
E Cycle Time	t_C	500	---	---	ns	E
E Rise Time	t_R	---	---	20	ns	E
E Fall Time	t_F	---	---	20	ns	E
E Pulse width (High, Low)	t_W	230	---	---	ns	E
R/W and RS Set-up Time	t_{SU}	40	---	---	ns	R/W,RS
R/W and RS Hold Time	t_H	10	---	---	ns	R/W,RS
0Data Output Delay Time	t_D	---	---	120	ns	DB0~DB7
Data Hold Time	t_{DH2}	5	---	---	ns	DB0~DB7

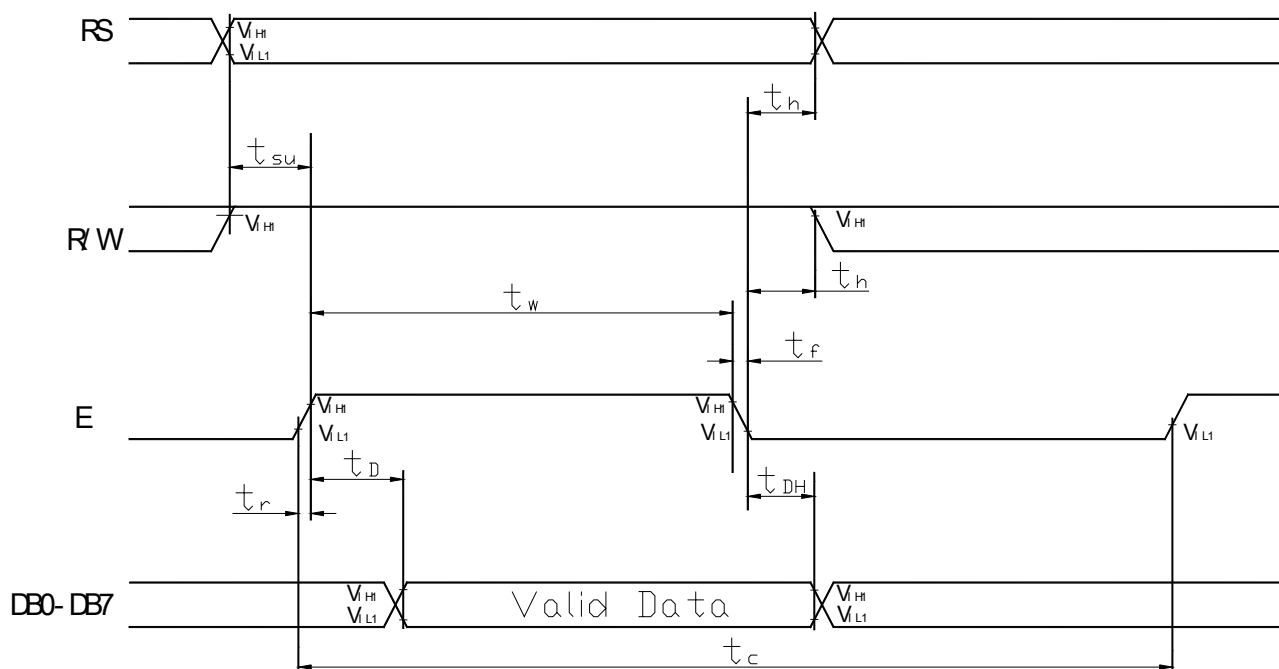

10. CONTROL AND DISPLAY COMMAND


Command	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Execution time (fosc=270 KHz)	Remark		
clear Display	L	L	L	L	L	L	L	L	L	H	1.53ms	Write “20H” to DDRAM and set DDRAM address to “00H” from AC		
Return home	L	L	L	L	L	L	L	L	H	---	1.53ms	Cursor move to first digit		
Entry mode set	L	L	L	L	L	L	L	H	I/D	SH	39us	I/D: set cursor move direction		
												I/D	H	Increase
													L	Decrease
												SH: Specifies shift of display		
												SH	H	Display is shifted
L	Display is not shifted													
Display on/off control	L	L	L	L	L	L	H	D	C	B	39us	Display		
												D	H	Display on
													L	Display off
												Cursor		
												C	H	Cursor on
													L	Cursor off
												Blinking		
B	H	Blinking on												
	L	Blinking off												
Cursor or Display Shift	L	L	L	L	L	H	S/C	R/L	---	---	39us	SC		
												H	Display shift	
												L	Cursor move	
												R/L	H	Right shift
function Set	L	L	L	L	H	DL	N	F	---	---	39us	DL		
												H	8bits interface	
												L	4bits interface	
												N	H	2 line display
													L	1 line display
F	H	5 x 11 dots												
	L	5 x 8 dots												
Set CGRAM address	L	L	L	H	AC5	AC4	AC3	AC2	AC1	AC0	39us	CGRAM data is sent and received after this setting		
Set DDRAM address	L	L	H	AC6	AC5	AC4	AC3	AC2	AC1	AC0	39us	DDRAM data is sent and received after this setting		
Read busy flag& address	L	H	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	0us	BF		
												H	Busy	
												-Reads BF indication internal operating is being performed -Reads address counter contents		
Write data to RAM	H	L	D7	D6	D5	D4	D3	D2	D1	D0	43us	Write data into DDRAM or CGRAM		
Read data from RAM	H	H	D7	D6	D5	D4	D3	D2	D1	D0	43us	Read data from DDRAM or CGRAM		

11. STANDARD CHARACTER PATTERN (S6A0069-22)

Upper(4bit) Lower(4bit)		LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)																
LLLH	(2)																
LLHL	(3)																
LLHH	(4)																
LHLL	(5)																
LHLH	(6)																
LHHL	(7)																
LHHH	(8)																
HLLL	(1)																
HLLH	(2)																
HLHL	(3)																
HLHH	(4)																
HHLL	(5)																
HHLH	(6)																
HHHL	(7)																
HHHH	(8)																

12. LCM INITIALIZING BY INSTRUCTION

12-1 8-bit Interface Mode

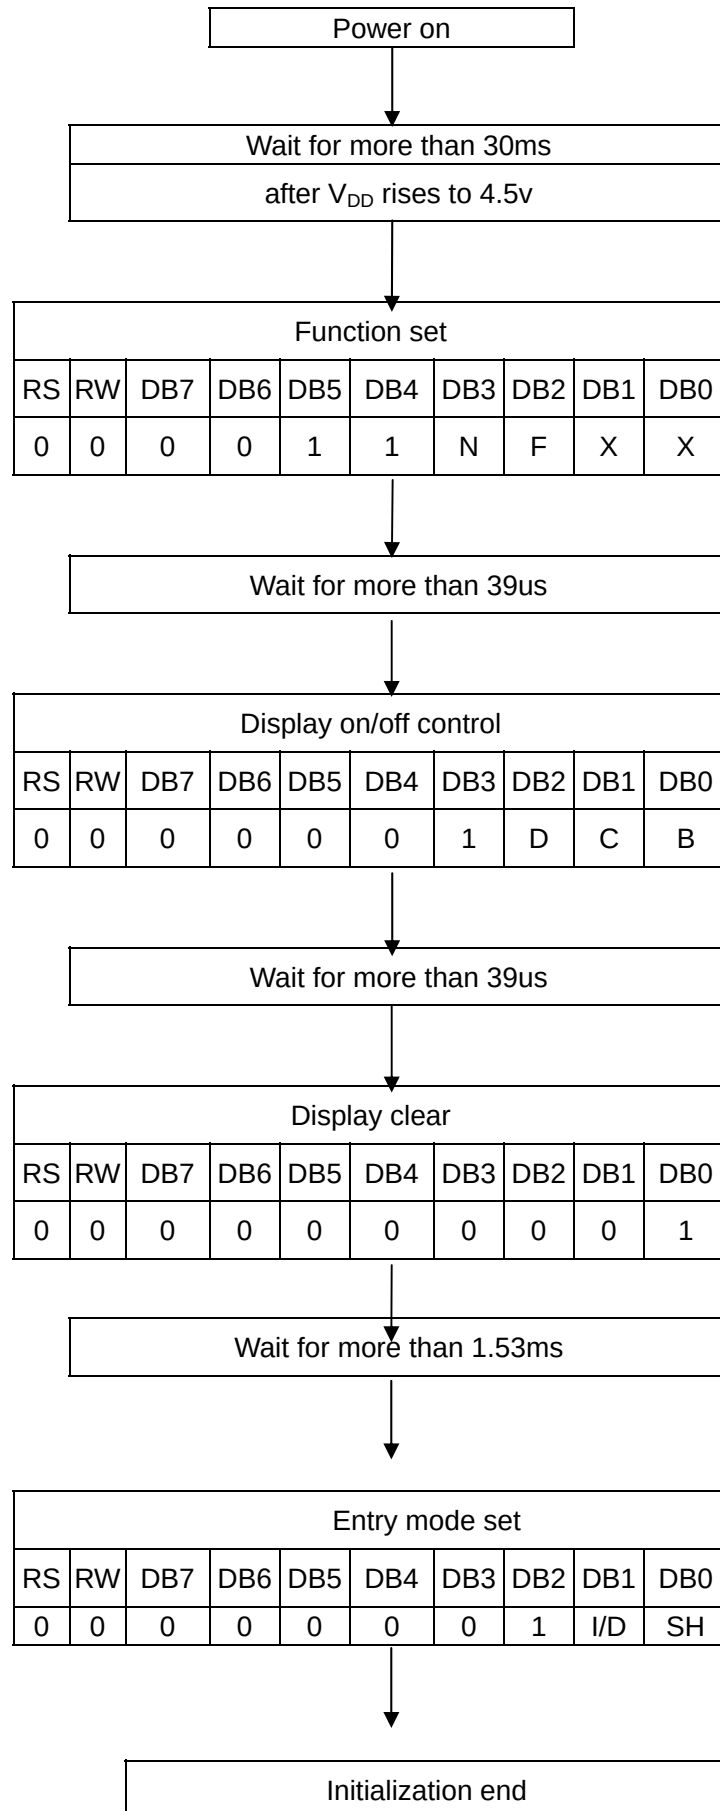

Condition : fosc=270khz

N	0	1-line mode
	1	2-line mode

F	0	5 x 8 font
	1	5 x 11 font

D	0	display off
	1	display on


C	0	cursor off
	1	cursor on

B	0	blink off
	1	blink on

I/D	0	decrement mode
	1	increment mode

SH	0	entire shift off
	1	entire shift on

12-2 4-bit Interface Mode

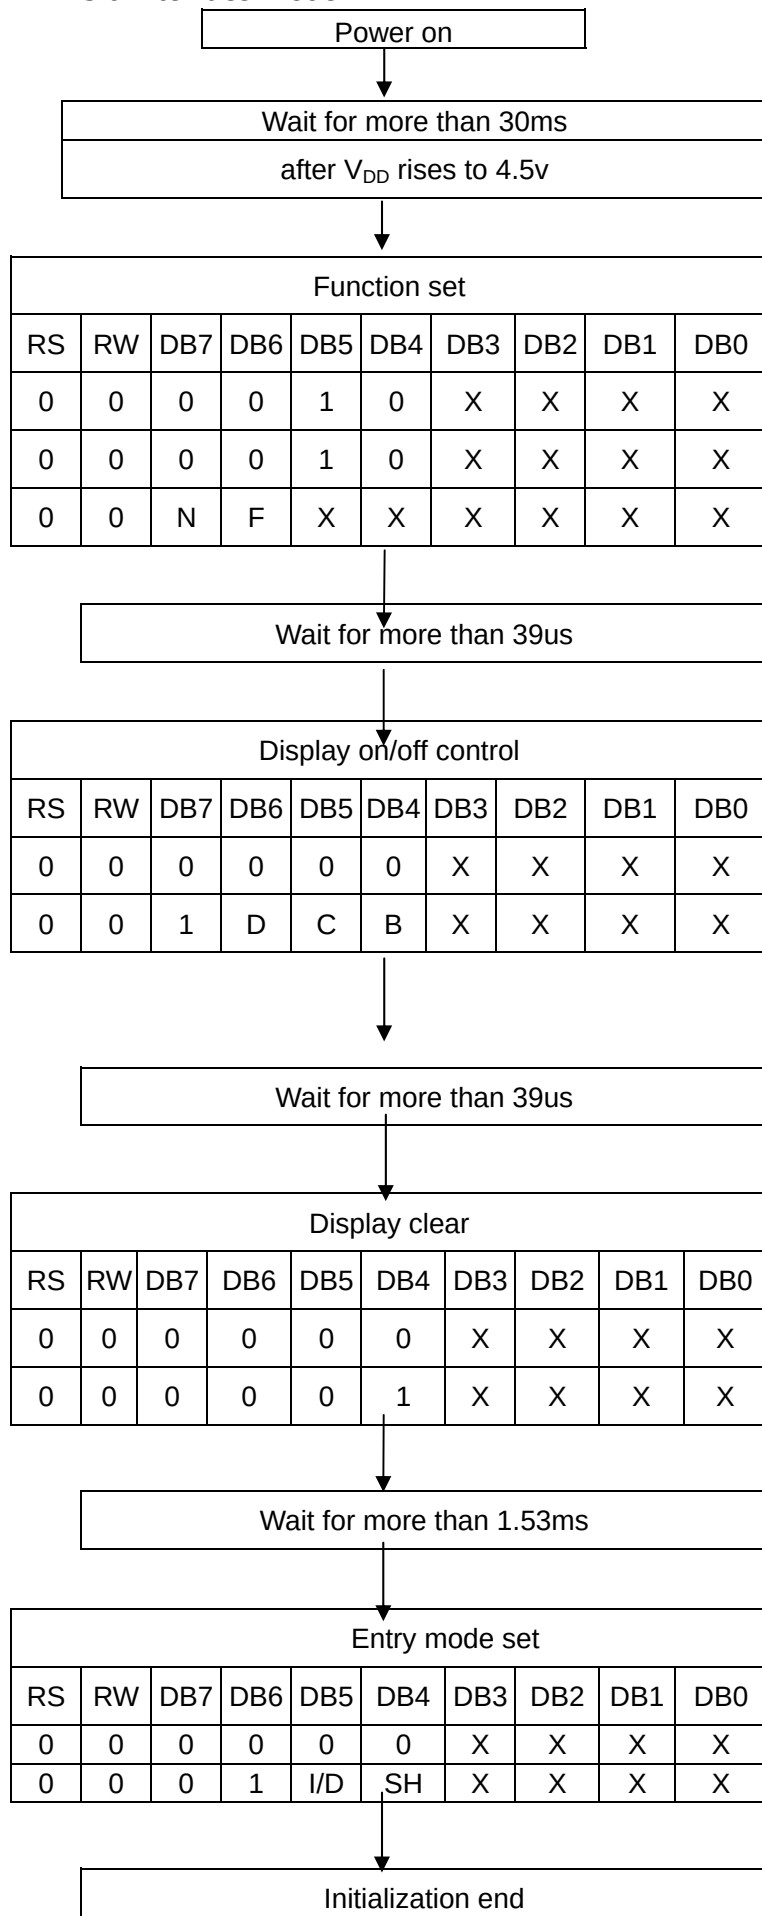

Condition : fosc=270khz

N	0	1-line mode
	1	2-line mode
F	0	5 x 8 font
	1	5 x 11 font

D	0	display off
	1	Display on
C	0	cursor off
	1	cursor on
B	0	blink off
	1	blink on

I/D	0	decrement mode
	1	increment mode
SH	0	entire shift off
	1	entire shift on

13. LCD MODULES HANDLING PRECAUTIONS

- Please remove the protection foil of polarizer before using.
- The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- If the display panel is damaged and the liquid crystal substance inside it leaks out, do not get any in your mouth. If the substance come into contact with your skin or clothes promptly wash it off using soap and water.
- Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarize carefully.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD module.
 - Tools required for assembly, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- Storage precautions
When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags designed to prevent static electricity charging under low temperature / normal humidity conditions (avoid high temperature / high humidity and low temperatures below 0°C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

14. OTHERS

- Liquid crystals solidify at low temperature (below the storage temperature range) leading to defective orientation of liquid crystal or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subjected to a strong shock at a low temperature.
- If the LCD modules have been operating for a long time showing the same display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. Abnormal operating status can be resumed to be normal condition by suspending use for some time. It should be noted that this phenomena does not adversely affect performance reliability.
- To minimize the performance degradation of the LCD modules resulting from caused by static electricity, etc. exercise care to avoid holding the following sections when handling the modules:
 - Exposed area of the printed circuit board
 - Terminal electrode sections