

### PRELIMINARY SPEC

Part Number: L-7700C4SURC-G



### Technical Data

#### Features

- \* HIGH LUMINANCE OUTPUT.
- \* DESIGN FOR HIGH CURRENT OPERATION.
- \* SOLDERLESS MOUNTING TECHNIQUE.
- \* LOW POWER CONSUMPTION.
- \* LOW THERMAL RESISTANCE.
- \* LOW PROFILE.
- \* PACKAGED IN TUBES FOR USE WITH AUTOMATIC INSERTION EQUIPMENT.
- \* RoHS COMPLIANT.

#### Benefits


- \*Rugged Lighting Products.
- \*Electricity savings.
- \*Maintenance savings.
- \*Environmental Conformance.

#### Typical Applications

- \*Automotive Exterior Lighting.
- \*Solid State Lighting and Signaling.




# Outline Drawings

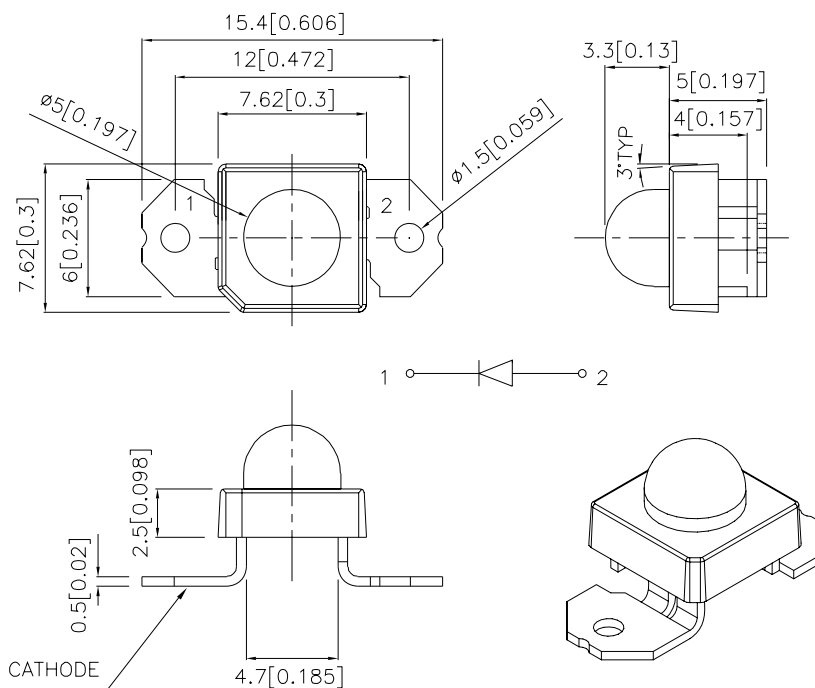

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

PATENT PENDING

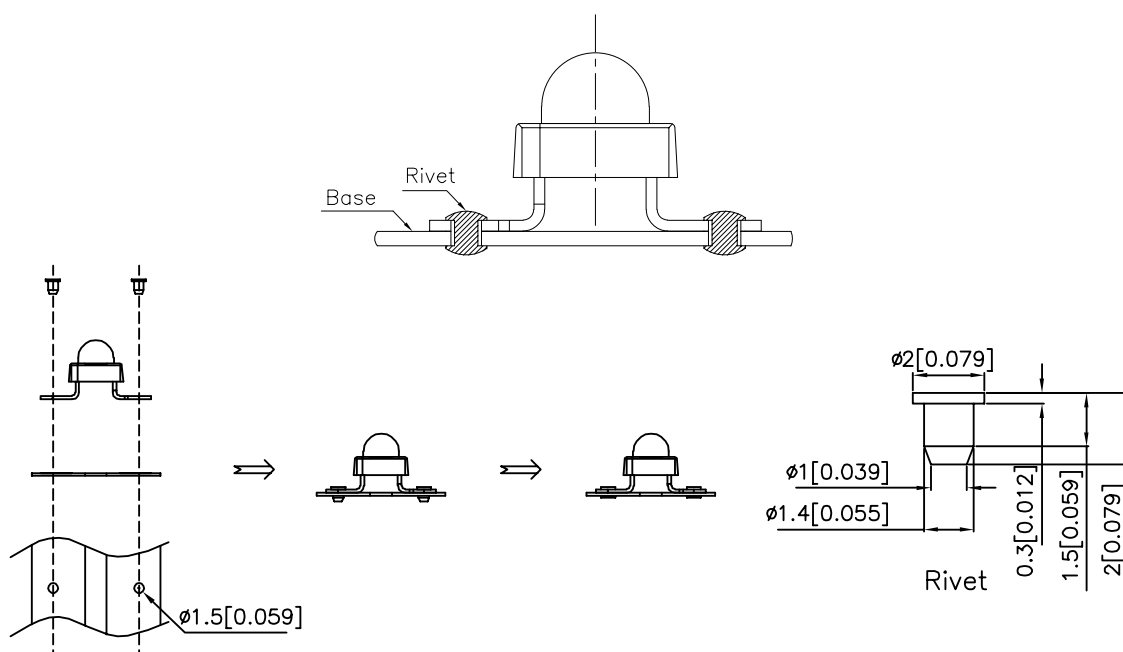

## Absolute Maximum Ratings at TA=25°C

PARAMETER	SUR-G	UNITS
DC Forward Current	70	mA
Power dissipation	160	mW
Reverse Voltage	5	V
Operating Temperature	-40 To +85	°C
Storage Temperature	-55 To +85	°C

## Selection Guide

Part No.	LED COLOR	Iv(cd) <sup>[1]</sup> @70mA		Viewing Angle <sup>[2]</sup> 2θ1/2
		Min.	Typ.	Typ.
L-7700C4SURC-G	HYPER RED (InGaAlP)	4.7	7	30°

### Notes:

- Luminous intensity is measured with an integrating sphere after the device has stabilized; Luminous intensity / luminous flux: +/-15%.
- θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Optical Characteristics at TA=25°C

If=70mA Rθj-a=200°C/W

DEVICE TYPE	PEAK WAVELENGTH λPEAK (nm) TYP.	DOMINANT <sup>[1]</sup> WAVELENGTH λDOM (nm) TYP.	SPECTRAL LINE WAVELENGTH Δλ1/2(nm) TYP.
L-7700C4SURC-G	640	630	22

### Note:

- The dominant wavelength is derived from the CIE Chromaticity Diagram and represents the perceived color of the device; Wavelength: +/-1nm.

## Electrical Characteristics at TA=25°C

DEVICE  TYPE	FORWARD VOLTAGE VF(VOLTS) <sup>[1]</sup> @ IF=70mA			REVERSE CURRENT IR (uA) @ VR=5V	CAPACITANCE C (pF) @ VF=0V F=1MHZ	THERMAL RESISTANCE Rθj-pin °C/W
	MIN.	TYP.	MAX.	MAX.	TYP.	TYP.
L-7700C4SURC-G	1.9	2.2	2.5	10	45	125

### Note:

- Forward Voltage: +/-0.1V.

Figures

