

N-Channel 60-V (D-S), 175 °C MOSFET, Logic Level

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
60	0.016 at $V_{GS} = 10$ V	50
	0.022 at $V_{GS} = 4.5$ V	43


FEATURES

- TrenchFET® Power MOSFET
- 175 °C Junction Temperature



RoHS*
COMPLIANT


TO-263



DRAIN connected to TAB

Top View

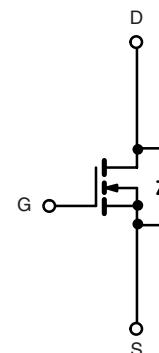Ordering Information: SUM50N06-16L
SUM50N06-16L-E3 (Lead (Pb)-free)



N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS $T_C = 25$ °C, unless otherwise noted			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current ($T_J = 175$ °C)	I_D	50	A
		35	
Pulsed Drain Current	I_{DM}	100	
Avalanche Current	I_{AR}	40	
Repetitive Avalanche Energy ^a	E_{AR}	80	mJ
Power Dissipation	P_D	93 ^b	W
		3.7 ^c	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	- 55 to 175	°C

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Junction-to-Ambient	R_{thJA}	40	°C/W
Junction-to-Case	R_{thJC}	1.6	

Notes:

a. Duty cycle ≤ 1 %.

b. See SOA curve for voltage derating.

c. Surface mounted on FR4 Board, $t \leq 10$ s.

* Pb containing terminations are not RoHS compliant, exemptions may apply.

SUM50N06-16L

Vishay Siliconix









SPECIFICATIONS $T_J = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	60			V
Gate-Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{DS}} = 250 \mu\text{A}$	1.0	2.0	3.0	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0 \text{ V}, V_{\text{GS}} = \pm 20 \text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 60 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			1	μA
		$V_{\text{DS}} = 60 \text{ V}, V_{\text{GS}} = 0 \text{ V}, T_J = 125^\circ\text{C}$			50	
		$V_{\text{DS}} = 60 \text{ V}, V_{\text{GS}} = 0 \text{ V}, T_J = 175^\circ\text{C}$			150	
On-State Drain Current ^a	$I_{\text{D}(\text{on})}$	$V_{\text{DS}} = 5 \text{ V}, V_{\text{GS}} = 10 \text{ V}$	50			A
Drain-Source On-State Resistance ^a	$r_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10 \text{ V}, I_D = 20 \text{ A}$		0.013	0.016	Ω
		$V_{\text{GS}} = 10 \text{ V}, I_D = 20 \text{ A}, T_J = 125^\circ\text{C}$			0.028	
		$V_{\text{GS}} = 10 \text{ V}, I_D = 20 \text{ A}, T_J = 175^\circ\text{C}$			0.036	
		$V_{\text{GS}} = 4.5 \text{ V}, I_D = 20 \text{ A}$		0.017	0.022	
Forward Transconductance ^a	g_{fs}	$V_{\text{DS}} = 15 \text{ V}, I_D = 20 \text{ A}$		50		S
Dynamic^b						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0 \text{ V}, V_{\text{DS}} = 25 \text{ V}, f = 1 \text{ MHz}$		1325		pF
Output Capacitance	C_{oss}			265		
Reverse Transfer Capacitance	C_{rss}			115		
Total Gate Charge ^c	Q_g	$V_{\text{DS}} = 30 \text{ V}, V_{\text{GS}} = 10 \text{ V}, I_D = 50 \text{ A}$		25	40	nC
Gate-Source Charge ^c	Q_{gs}			5.5		
Gate-Drain Charge ^c	Q_{gd}			6.5		
Turn-On Delay Time ^c	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 30 \text{ V}, R_L = 0.8 \Omega$ $I_D \approx 50 \text{ A}, V_{\text{GEN}} = 10 \text{ V}, R_G = 2.5 \Omega$		10	20	ns
Rise Time ^c	t_r			9	20	
Turn-Off Delay Time ^c	$t_{\text{d}(\text{off})}$			25	50	
Fall Time ^c	t_f			7	15	
Source-Drain Diode Ratings and Characteristics $T_C = 25^\circ\text{C}^b$						
Continuous Current	I_S				50	A
Pulsed Current	I_{SM}				100	
Forward Voltage ^a	V_{SD}	$I_F = 50 \text{ A}, V_{\text{GS}} = 0 \text{ V}$		1.0	1.5	V
Reverse Recovery Time	t_{rr}	$I_F = 50 \text{ A}, \text{di/dt} = 100 \text{ A}/\mu\text{s}$		35	70	ns
Peak Reverse Recovery Current	$I_{\text{RM}(\text{REC})}$			2.3	4	A
Reverse Recovery Charge	Q_{rr}			0.04	0.14	μC

Notes:

- a. Pulse test; pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2 \%$.
- b. Guaranteed by design, not subject to production testing.
- c. Independent of operating temperature.

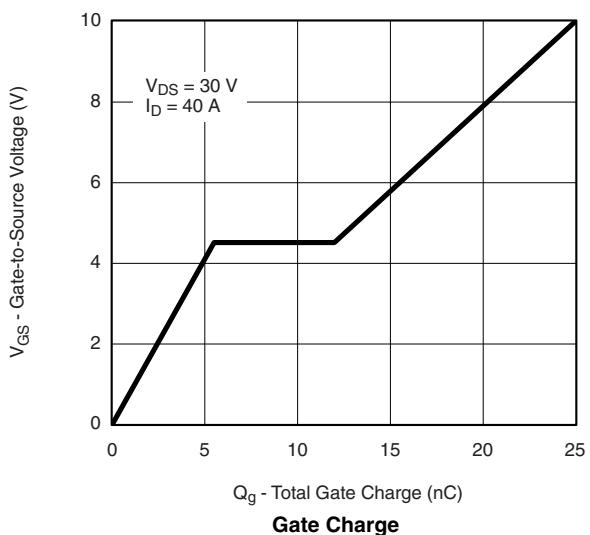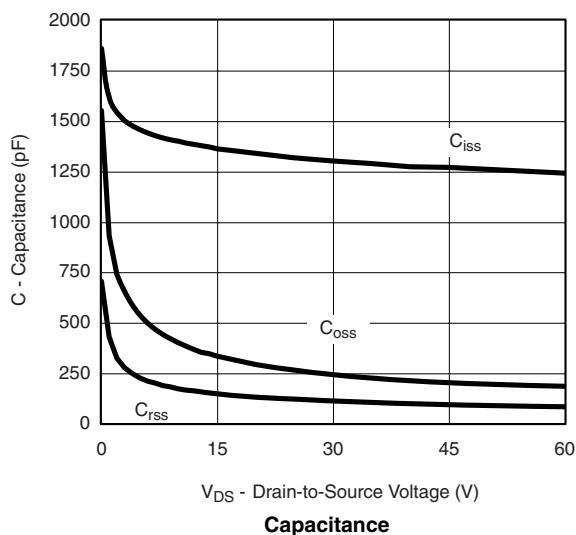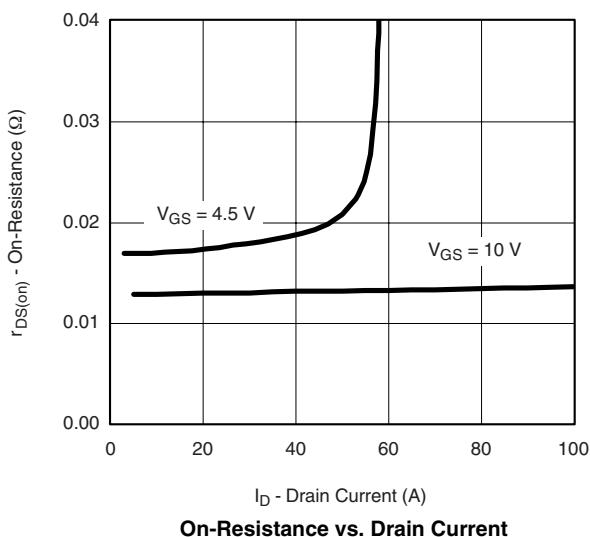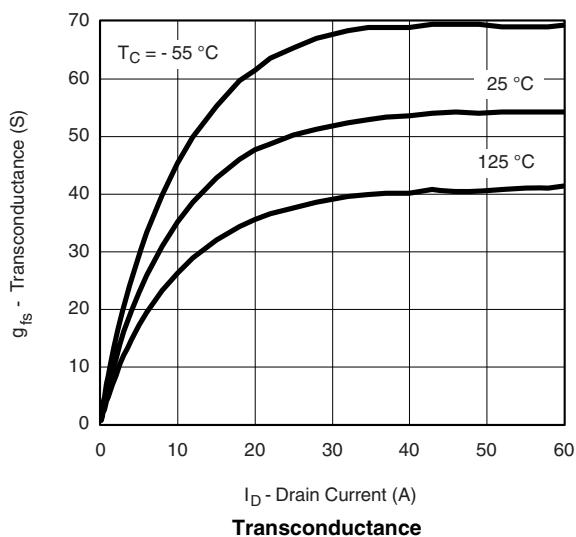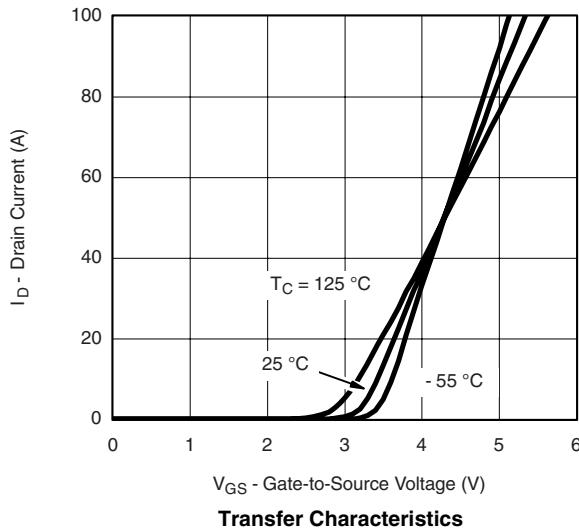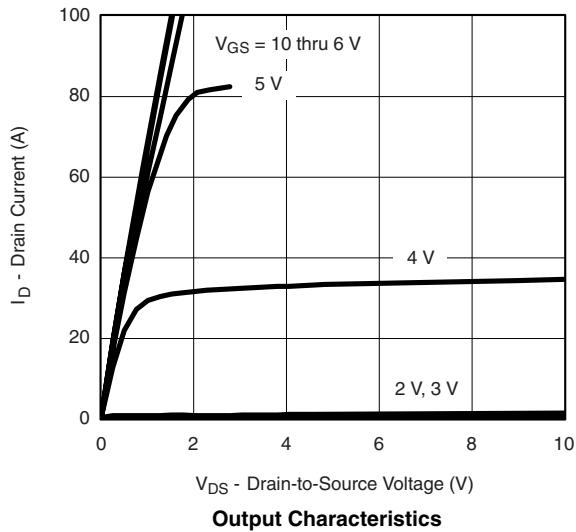Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted


SUM50N06-16L


Vishay Siliconix




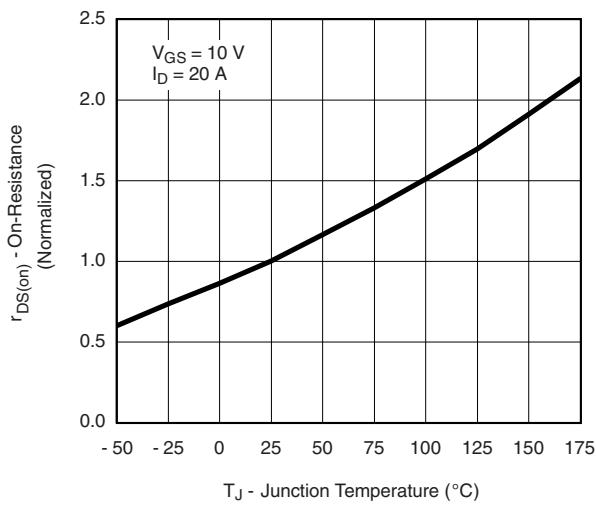
TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted






On-Resistance vs. Junction Temperature

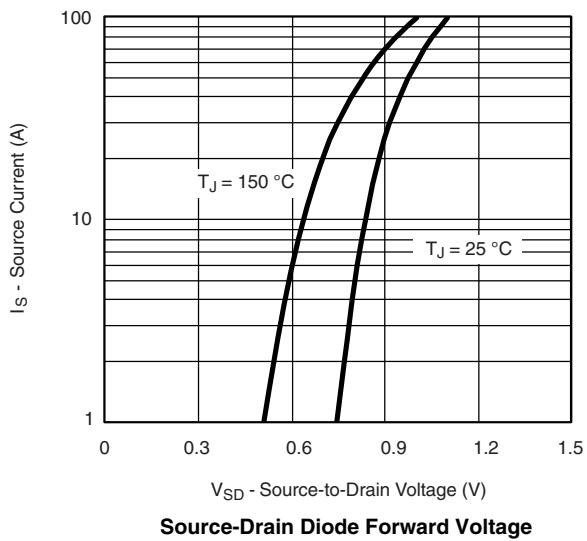

Source-Drain Diode Forward Voltage

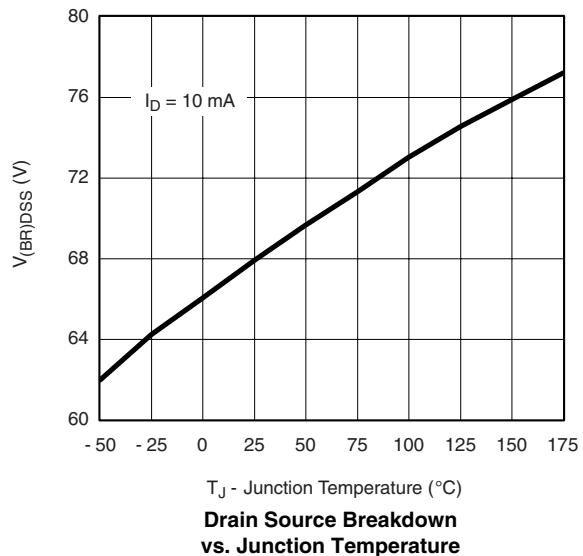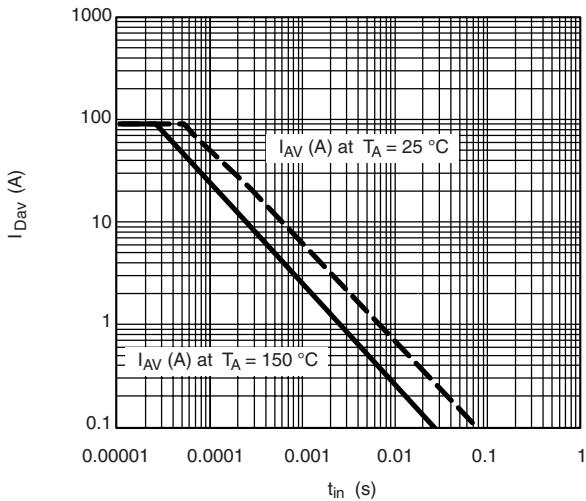

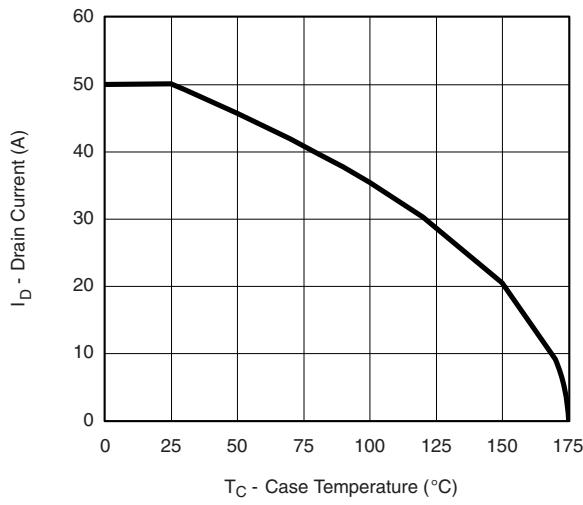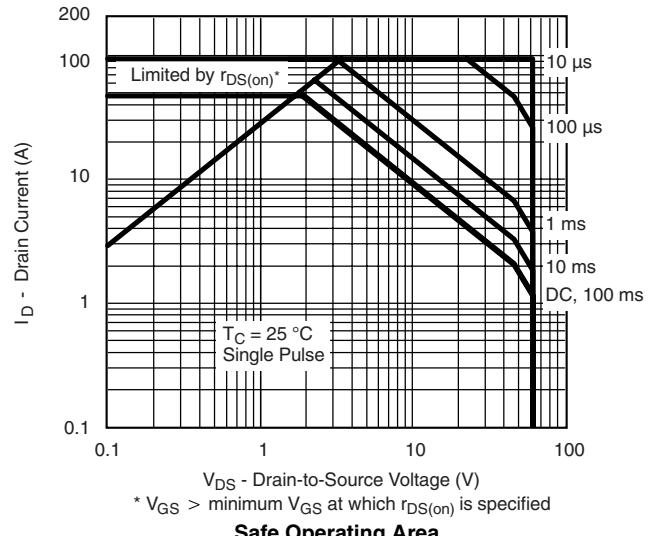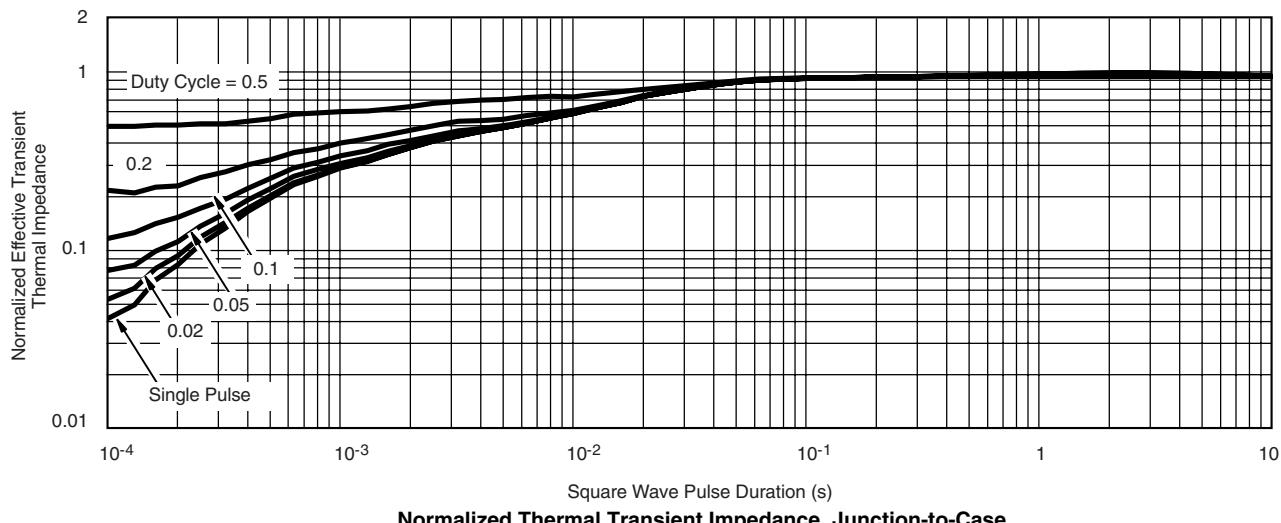Drain Source Breakdown
vs. Junction Temperature

THERMAL RATINGS

Drain Current vs. Case Temperature

Safe Operating Area

Normalized Thermal Transient Impedance, Junction-to-Case

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?72048>.



Legal Disclaimer Notice

Vishay

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.